

ASME AED-1–2018

Aerospace and Advanced Engineering Drawings

ASMENORMDOC.COM : Click to view the PDF of ASME AED-1 2018

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

ASME AED-1-2018

Aerospace and Advanced Engineering Drawings

ASMENORMDOC.COM : Click to view the full PDF of ASME AED-1 2018

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

Two Park Avenue • New York, NY • 10016 USA

Date of Issuance: December 10, 2018

The next edition of this Standard is scheduled for publication in 2023.

Periodically certain actions of the ASME AED Committee may be published as Cases. Cases are published on the ASME website under the AED Committee Page at <http://go.asme.org/AEDcommittee> as they are issued.

Errata to codes and standards may be posted on the ASME website under the Committee Pages to provide corrections to incorrectly published items, or to correct typographical or grammatical errors in codes and standards. Such errata shall be used on the date posted.

The AED Committee Page can be found at <http://go.asme.org/AEDcommittee>. There is an option available to automatically receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the appropriate Committee Page after selecting "Errata" in the "Publication Information" section.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Two Park Avenue, New York, NY 10016-5990

Copyright © 2018 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	v
Committee Roster	vi
Correspondence With the AED Committee	vii
1 General	1
2 References	2
3 Definitions	2
4 Engineering Drawing Practices	5
5 Assembly Tolerancing	8
6 Additional Drawing Practices	14
Mandatory Appendix	
I Dynamic Profile	30
Figures	
1-1 Form and Proportions of Symbols	3
3-1 Corner	4
3-2 Edge	4
4-1 Arrangement of Aircraft Views	6
4-2 Identification of Geometry Reference Planes	6
4-3 Application of the Symbol Method	7
4-4 Orientation and Direction of Dimensional Requirements	8
4-5 No-Arrow or Double-Arrow Option Methods	9
4-6 Pilot Hole Location Specification	10
5-1 Existing Feature Adjustment Tolerancing Example	11
5-2 Reference Method	13
5-3 Applicable Condition Method	15
5-4 Aggregate Datum With Inherent Motion in the Assembly	16
6-1 Blind Hole	16
6-2 Blind Hole With a Through Hole	17
6-3 135-deg Drill Point Callout Example	18
6-4 Edge Break Examples	19
6-5 Center-Located Radius	20
6-6 Tangent-Located Radius	21
6-7 Controlled Radius	21
6-8 External Radius — Permissible Termination	22
6-9 Internal Radius — Permissible Termination	23
6-10 Views With True Dimensions	24
6-11 Views With All Dimensions True	25

6-12	Parabola Tangency	26
6-13	Parabolic Fillet — Example Specification	28
6-14	Elliptical Fillet — Example Specification	29
I-1	Composite Profile With Dynamic Profile to Control Form	31
I-2	Composite Profile With Dynamic Profile to Control Form and Constrain Rotational Degrees of Freedom	32
I-3	Use of Dynamic Profile in a Two-Single-Segment Profile Tolerance	33
I-4	Dynamic Profile of a Surface of Revolution	34

ASMENORMDOC.COM : Click to view the full PDF of ASME AED-1 2018

FOREWORD

Since many major industries are increasingly globalized, resulting in the decentralization of design and manufacturing activities, it is imperative that design documentation more completely and accurately identify functional requirements. In 2007, a cross-functional group met in Washington, DC, to discuss the business pressures and needs of the aerospace industry. From this meeting, a consensus was reached to explore the creation of a new standard that would enable those in the aerospace industry to harmonize best practices and further standardize the creation and interpretation of engineering drawings. Additional meetings highlighted the need to expand the scope of the group's efforts beyond the aerospace industry, and the ASME Aerospace and Advanced Engineering Drawing (AED) Committee now represents all advanced manufacturing technologies.

ASME AED-1 provides a method for documenting the design requirements that are common to aerospace and other industries that use advanced manufacturing technologies. This Standard offers symbologies, terminologies, and concepts to enhance the understanding and abilities of those who create and use design documentation. It is hoped that a common documentation methodology will decrease design and manufacturing costs and improve quality.

This Standard is not intended to replace any of the ASME Y14 series of standards for engineering drawings. Rather, it functions as a supplement to the ASME Y14 series, allowing use of defined symbologies, terminologies, and concepts until the appropriate ASME Y14 subcommittee adopts the principles expressed herein.

As this Standard evolves, many of the concepts introduced herein will migrate to more appropriate ASME standards. When this occurs, the affected information will be moved into an appendix within ASME AED-1. In this manner, control and ownership of the subject matter will be placed with the proper committee, but the history and usage will remain visible within ASME AED-1.

This Standard is available for public review on a continuing basis. This provides an opportunity for additional public-review input from industry, academia, regulatory agencies, and the public-at-large.

This Standard was approved by the AED Standards Committee. It was approved as an American National Standard by the American National Standards Institute (ANSI) Board of Standards Review on September 25, 2018.

ASME NORMDOC.COM : Click to view the full PDF of ASME AED-1 2018

ASME AED COMMITTEE

Aerospace and Advanced Engineering Drawings

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

T. Bowers, *Chair*
E. F. Zwettler, *Vice Chair*
L. Chan, *Staff Secretary*
R. Leonovicz, *Secretary*

STANDARDS COMMITTEE PERSONNEL

T. Bowers, Lockheed Martin Space Systems Co.
J. V. Burleigh, Consultant
L. Chan, The American Society of Mechanical Engineers
D. O. Coon, Bell Helicopter
B. Fischer, TDP360, LLC
S. W. Graham, General Electric
M. W. Holcumbrink, Raytheon
J. B. Hoskins, Boeing
C. Houk, Consultant

W. Kaba, Spirit AeroSystems, Inc.
R. Leonovicz, Pratt & Whitney
J. Michalowicz, Stryker
J. I. Miles, Sr., Dimensional Management
D. Newman, B/E Aerospace
B. Nielsen, Boeing
J. C. Weers, Consultant
R. A. Wheeler, RW-OptDesign
E. F. Zwettler, Rolls-Royce Corp.

SUBCOMMITTEE 1 — AED PROJECT TEAM ASSEMBLY LEVEL TOLERANCING

D. O. Coon, Bell Helicopter
A. R. Gellings, Deere & Co.
C. Houk, Consultant
J. Michalowicz, Stryker
T. J. Miller, Ford Motor Co.
S. Neumann, Technical Consultants, Inc.

D. Newman, B/E Aerospace
B. Nielsen, Boeing
R. A. Reis, Lockheed Martin Space Systems Co.
S. Villyard, Lockheed Martin Space Systems Co.
R. A. Wheeler, RW-OptDesign
E. F. Zwettler, Rolls-Royce Corp.

CORRESPONDENCE WITH THE AED COMMITTEE

General. ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions or a case, and attending Committee meetings. Correspondence should be addressed to:

Secretary, AED Standards Committee
The American Society of Mechanical Engineers
Two Park Avenue
New York, NY 10016-5990
<http://go.asme.org/Inquiry>

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued to provide alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the Standard and the paragraph, figure, or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the Standard to which the proposed Case applies.

Attending Committee Meetings. The AED Standards Committee regularly holds meetings and/or telephone conferences that are open to the public. Persons wishing to attend any meeting and/or telephone conference should contact the Secretary of the AED Standards Committee. Future Committee meeting dates and locations can be found on the Committee Page at <http://go.asme.org/AEDcommittee>.

ASMENORMDOC.COM : Click to view the full PDF of ASME AED-1 2018

INTENTIONALLY LEFT BLANK

AEROSPACE AND ADVANCED ENGINEERING DRAWINGS

1 GENERAL

1.1 Scope

This Standard provides a method to document requirements that are common across aerospace and other industries that use advanced manufacturing technologies. This Standard offers symbologies, terminologies, and concepts to enhance the understanding and abilities of those who create and use design documentation.

1.2 Conventions

The conventions in [paras. 1.2.1](#) through [1.2.10](#) are used in this Standard. With the exception of the system of units described in [para. 1.2.7](#), these conventions are similar to the conventions used in the ASME Y14 standards.

1.2.1 Mandatory, Nonmandatory, Guidance, and Optional Words

- (a) The words “shall” and “will” establish a mandatory requirement.
- (b) The words “should” and “may” establish a recommended practice.
- (c) The words “typical,” “example,” “for reference,” and the Latin abbreviation “e.g.” indicate suggestions given for guidance only.
- (d) The word “or” used in conjunction with a mandatory requirement or a recommended practice indicates that there are two or more options on how to comply with the stated requirement.

1.2.2 Cross-Reference of Standards. Cross-reference of standards in text with or without a date following the standard designator shall be interpreted as follows:

- (a) Reference to ASME Y14 standards in the text without a date following the standard designator indicates that the issue of the standard identified in the References section ([section 2](#)) shall be used to meet the requirement.
- (b) Reference to ASME Y14 standards in the text with a date following the standard designator indicates that only that issue of the standard shall be used to meet the requirement.

1.2.3 Invocation of Referenced Standards. The following examples define the invocation of a standard when specified in the References section ([section 2](#)) and referenced in the text of this Standard:

- (a) When a reference standard is cited in the text with no limitations to a specific subject or paragraph(s) of the standard, the entire standard is invoked, e.g., “Dimensioning and tolerancing shall be in accordance with ASME Y14.5” is invoking the complete standard because the subject of the standard is dimensioning and tolerancing and no specific subject or paragraph(s) within the standard are invoked.
- (b) When a referenced standard is cited in the text with limitations to a specific subject or paragraph(s) of the standard, only the paragraph(s) on that subject are invoked, e.g., “Assign part or identifying numbers in accordance with ASME Y14.100” is invoking only the paragraph(s) on part or identifying numbers because the subject of the standard is engineering drawing practices, and part or identifying numbers is a specific subject within the standard.
- (c) When a reference standard is cited in the text without an invoking statement such as “in accordance with,” the standard is for guidance only; e.g., “For gaging principles, see ASME Y14.43” is for guidance only, and no portion of the standard is invoked.

1.2.4 Parentheses Following a Definition. When a definition is followed by a standard referenced in parentheses, the standard referenced in parentheses is the source for the definition.

1.2.5 Notes. Notes depicted in this Standard in ALL UPPERCASE letters are intended to reflect actual drawing entries. Notes depicted in initial uppercase or lowercase letters are to be considered supporting data to the contents of this Standard and are not intended for literal entry on drawings. A statement requiring the addition of a note with the qualifier “such as” is a requirement to add a note, and the content of the text is allowed to vary to suit the application.

1.2.6 Acronyms and Abbreviations. Acronyms and abbreviations are spelled out the first time used in this Standard, followed by the acronym or abbreviation in parentheses. The acronym or abbreviation is used thereafter throughout the text.

1.2.7 Units. U.S. Customary units are featured in this Standard. It should be understood that the International System of Units (SI) could equally have been used without prejudice to the principles established.

1.2.8 Figures. The figures in this Standard are intended only as illustrations to aid the user in understanding the practices described in the text. In some cases, figures show a level of detail as needed for emphasis. In other cases, figures are incomplete by intent so as to illustrate a concept or facet thereof. The absence of figure(s) has no bearing on the applicability of the stated requirements or practice. To comply with the requirements of this Standard, actual data sets shall meet the content requirements set forth in the text. To assist the user of this Standard, a list of the paragraph(s) that refer to an illustration appears in the lower right-hand corner of each figure. This list may not be all-inclusive. The absence of a list is not a reason to assume inapplicability. A lowercase “h” is used in figures for letter height or for symbol proportions (see Figure 1-1). Select the applicable letter height in accordance with ASME Y14.2.

1.2.9 Precedence of Standards. The following are ASME Y14 standards that are basic engineering drawing standards:

ASME Y14.1, Decimal Inch Drawing Sheet Size and Format
 ASME Y14.1M, Metric Drawing Sheet Size and Format
 ASME Y14.2, Line Conventions and Lettering
 ASME Y14.3, Orthographic and Pictorial Views
 ASME Y14.5, Dimensioning and Tolerancing
 ASME Y14.24, Types and Applications of Engineering Drawings
 ASME Y14.34, Associated Lists
 ASME Y14.35, Revision of Engineering Drawings and Associated Documents
 ASME Y14.36, Surface Texture Symbols
 ASME Y14.38, Abbreviations and Acronyms for Use on Drawings and Related Documents
 ASME Y14.41, Digital Product Definition Data Practices
 ASME Y14.100, Engineering Drawing Practices

All other ASME Y14 standards are considered specialty types of standards and contain additional requirements or make exceptions to the basic standards as required to support a process or type of drawing.

1.2.10 Unless Otherwise Specified. The phrase “unless otherwise specified” (UOS) is used to indicate a default requirement. The phrase is used when the default is a generally applied requirement and an exception may be provided by another document or requirement.

1.3 Reference to This Standard

When drawings or data sets are based on this Standard, this fact shall be noted on the drawing or in the data set. A note similar to the following shall be added: “THIS DRAWING SHALL BE INTERPRETED IN ACCORDANCE WITH ASME Y14.100-2017 EXCEPT AS AMENDED BY ASME AED-1-2018.”

When this Standard in its entirety is not required, specific tailoring may be accomplished in a company interpretation document, drawing note, etc.

2 REFERENCES

The following revisions of American National Standards form a part of this Standard to the extent specified herein. A more recent revision may be used, provided there is no conflict with the text of this Standard. In the event of a conflict between the text of this Standard and the references cited herein, the text of this Standard shall take precedence.

ASME Y14.2-2014, Line Conventions and Lettering
 ASME Y14.5-2009, Dimensioning and Tolerancing
 ASME Y14.100-2017, Engineering Drawing Practices
 Publisher: The American Society of Mechanical Engineers (ASME), Two Park Avenue, New York, NY 10016-5990
 (www.asme.org)

3 DEFINITIONS

3.1 Blend

blend: a transition between adjacent surfaces intended to reduce abrupt changes in the topography.

Figure 1-1 Form and Proportions of Symbols

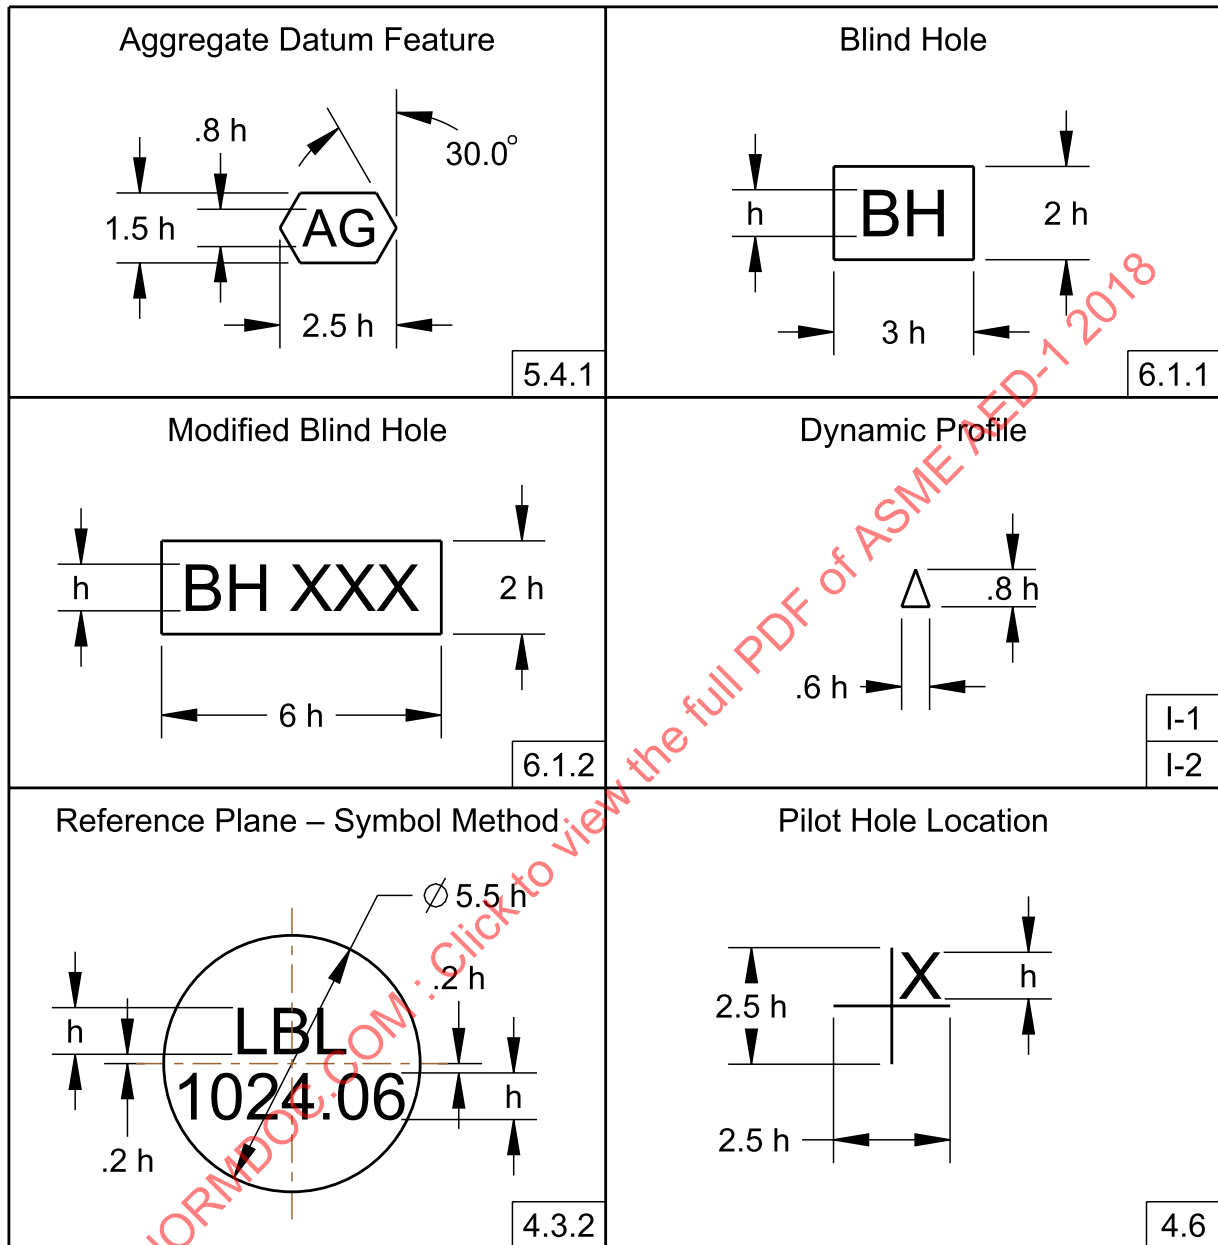
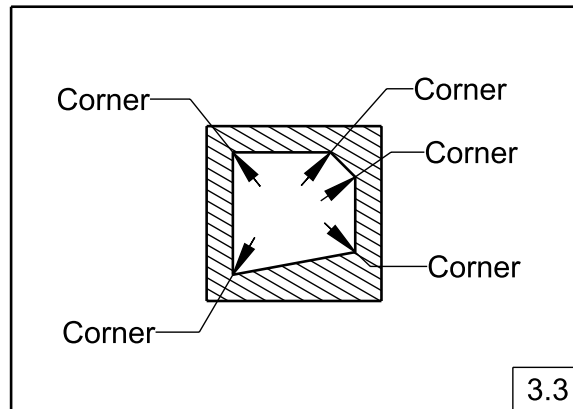


Figure 3-1 Corner**3.2 Blind Hole**

blind hole: a hole with a bottom internal to the material.

3.3 Corner

corner: the projected intersection of two surfaces, flat or curved, where the angle of included space is less than 180 deg. See [Figure 3-1](#).

3.4 Datum, Aggregate

datum, aggregate: a datum established from an assembly of parts where multiple features on multiple parts act together to create a single datum point, line, axis, or plane.

3.5 Edge


edge: the projected intersection of two surfaces, flat or curved, where the angle of included material is less than 180 deg. See [Figure 3-2](#).

3.6 Fillet

fillet: a radius applied to a corner of a part.

3.7 Pilot Hole

pilot hole: an undersized hole used to facilitate manufacturing or other processing.

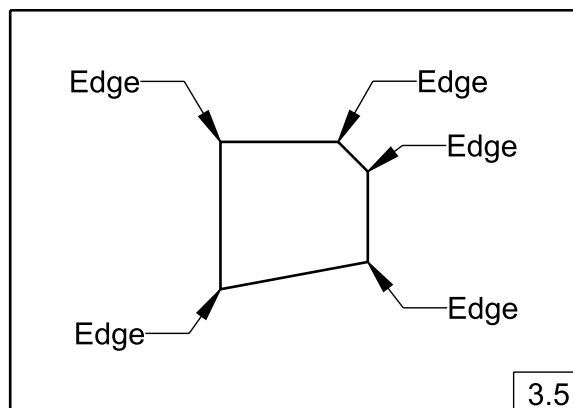Figure 3-2 Edge

3.8 Abbreviations

Abbreviation	Definition
AED	Aerospace and advanced engineering drawing
ASME	The American Society of Mechanical Engineers
BL	Buttock line
CR	Controlled radius (ASME Y14.5-2009)
DoD	U.S. Department of Defense
EP	Elliptical fillet
FS	Fuselage station
LBL	Left buttock line
LMB	Least material boundary (ASME Y14.5-2009)
MMB	Maximum material boundary (ASME Y14.5-2009)
OPTL	Optional
PA	Parabolic fillet
R	Radius (ASME Y14.5-2009)
RBL	Right buttock line
RS	Radome station
SI	International System of Units
STA	Station
UOS	Unless otherwise specified
WG STA	Wing station
WL	Waterline

4 ENGINEERING DRAWING PRACTICES

4.1 Aircraft and Related Part(s) Views

Engineering drawings that depict complete aircraft views should be arranged using left-side, rear, and top views as the principal orthographic views. The aircraft's nose in the top and left-side views shall point to the left-hand edge of the drawing and front (forward) direction of the aircraft. See [Figure 4-1](#) for aircraft views arrangement.

NOTE: For a piloted aircraft, the pilot's viewing direction while seated in the aircraft cockpit will be toward the front of the aircraft.

4.2 Aircraft Engines and Related Part(s) Views

UOS, the terms "FRONT," "REAR," "LEFT," and "RIGHT" may be used on engineering drawings to indicate position in an assembled aircraft engine or related parts (e.g., flange bracket mounting) as follows:

- (a) Front is in the direction closest to the nose of the vehicle.
- (b) Rear is the opposite of front.
- (c) Left and right are based on the observer's position when facing forward.

4.3 Aircraft Geometry Reference Plane Callouts and Toleranced Reference Planes

4.3.1 Aircraft Geometry Reference Planes. Geometry reference plane callouts are used to identify location on the vehicle. Designations for geometry reference planes include, but are not limited to, station (STA), fuselage station (FS), waterline (WL), wing station (WG STA), radome station (RS), buttock line (BL), right buttock line (RBL), and left buttock line (LBL).

4.3.2 Symbol or Callout Method. When used, geometry reference plane specifications shall be shown on the field of the drawing by using the symbol method or the callout method. The symbol method uses a consistent geometric shape, e.g., circle, rectangle, or cartouche, to specify the abbreviated reference plane designation and reference plane location. The callout method uses the abbreviated reference plane designation and reference plane location. See [Figures 1-1](#) and [4-2](#). When both methods are used on the same drawing, the callout method specifications shall be considered reference. A leader or extension line shall be used to designate the location of the reference plane.

Figure 4-1 Arrangement of Aircraft Views

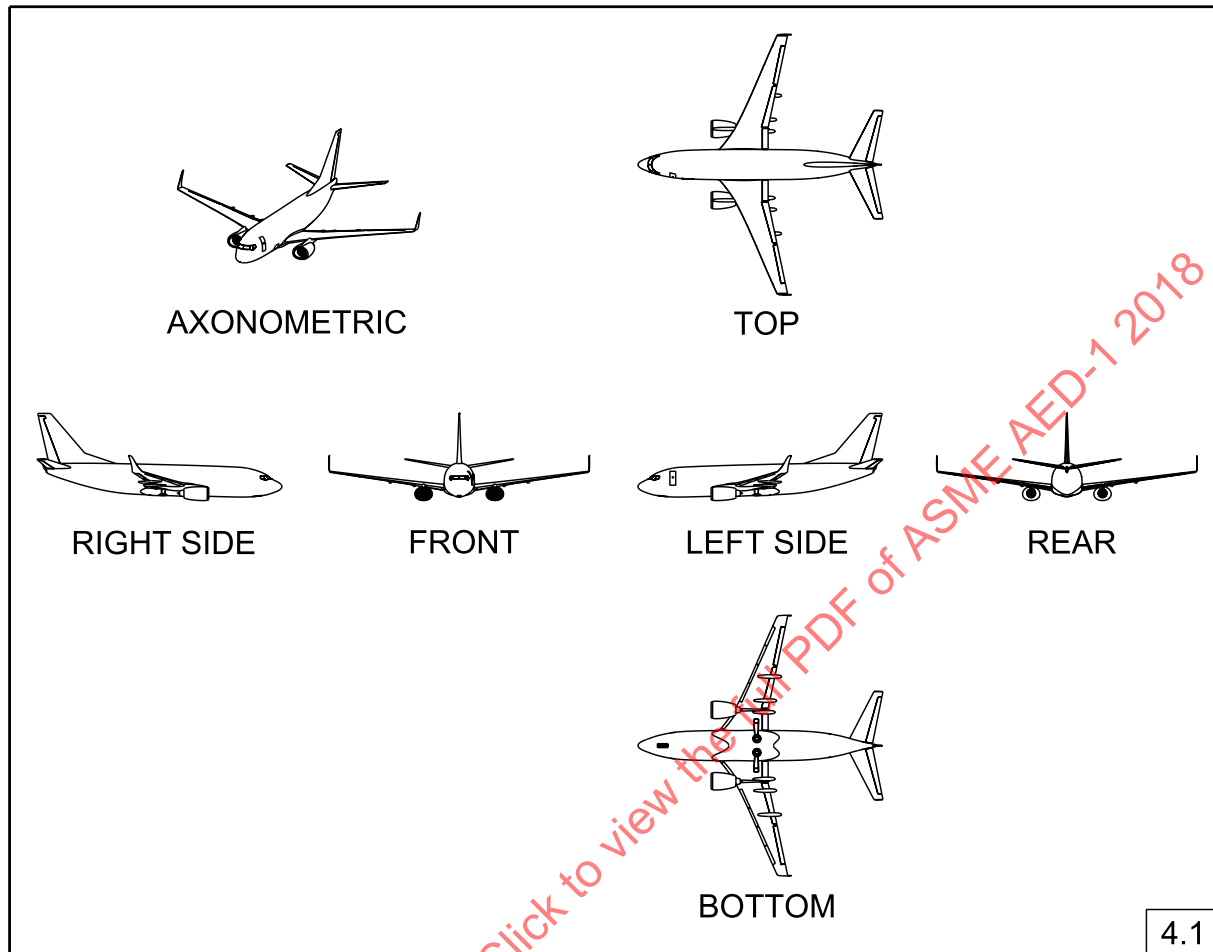


Figure 4-2 Identification of Geometry Reference Planes


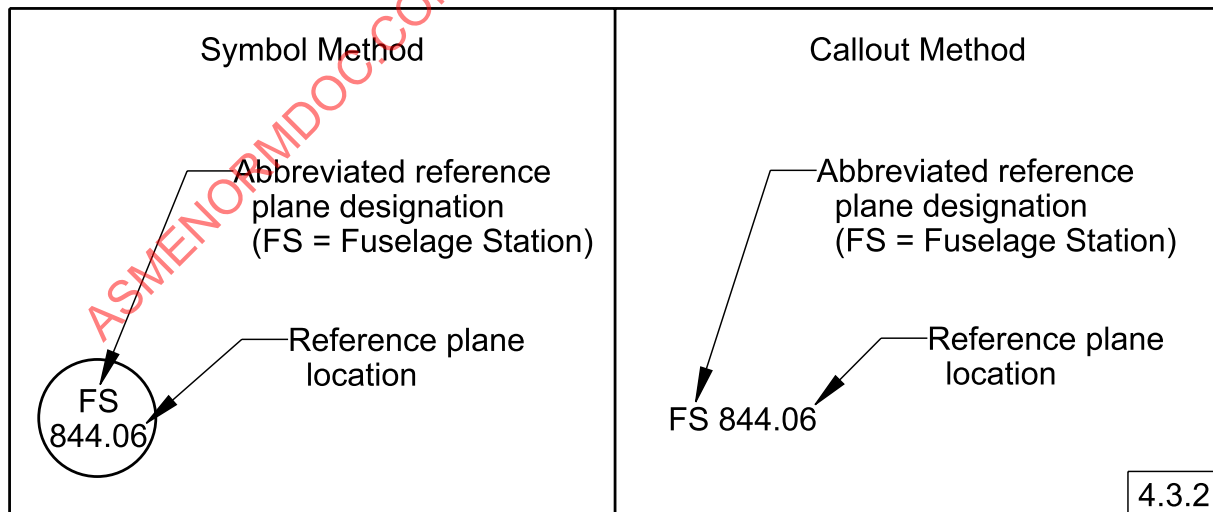


Figure 4-3 Application of the Symbol Method

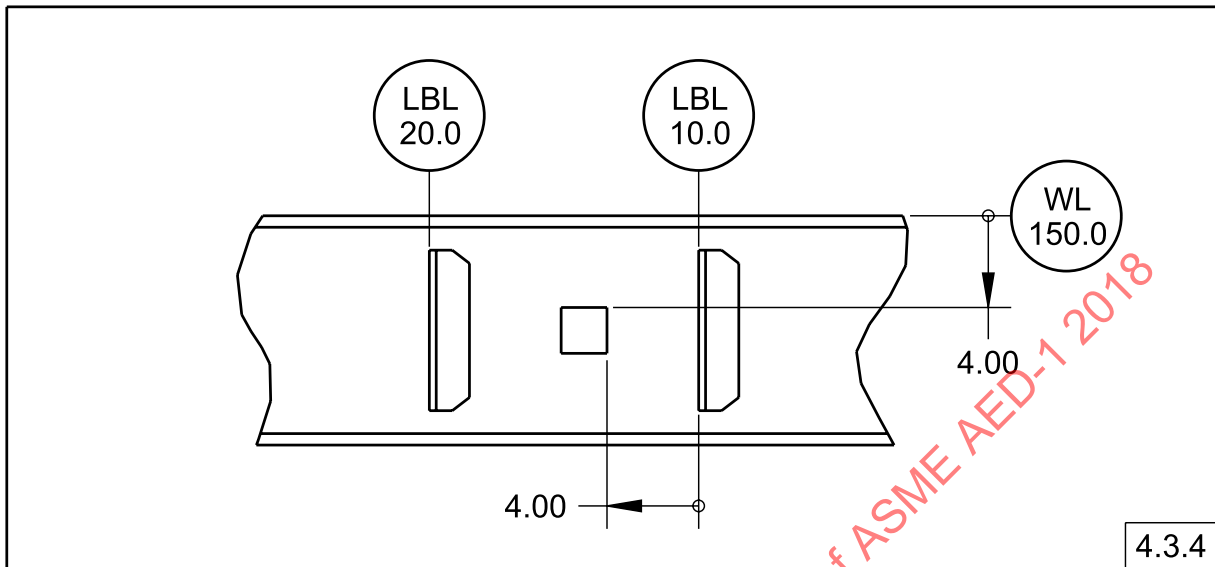

4.3.3 Tolerances. UOS, reference plane dimensions have no tolerance. The reference plane is theoretical and may be coincident with a toleranced feature.

4.3.4 Use of Geometry Reference Planes. Geometry reference planes that are coincident with a part feature may be used as a dimension origin. Geometry reference planes shall not establish datums. See Figure 4-3.

4.4 Orientation and Direction of Dimensional Requirements

Where the term “AXIAL,” “ANGULAR,” or “RADIAL” is used to describe the orientation or direction in which a dimensional requirement (e.g., a tolerance) is to be applied, the terms are as described below. See Figure 4-4 for an example of the use of the terms “AXIAL,” “ANGULAR,” and “RADIAL.”

- (a) The term “AXIAL” indicates that the dimensional requirement applies along an axis.
- (b) The term “ANGULAR” indicates that the dimensional requirement applies on either side of and parallel to an angular plane emanating from the part or feature axis.
- (c) The term “RADIAL” indicates that the dimensional requirement applies along a plane or line that is constructed normal to the part or feature axis.


4.5 Use of Single Dimension Lines or Double Arrowheads on Space-Restricted or Partial Views

When space is restricted, or when only a partial view is used, features may be dimensioned using one of the methods depicted in Figure 4-5. When the opposite, unshown, surface is unclear, that surface shall be identified in another view and be considered the dimension origin UOS.

4.6 Pilot Hole Location Symbols

When indicating an area to be reserved for pilot holes, those areas shall be identified on engineering drawings using the pilot hole location symbol depicted in Figures 1-1 and 4-6 and as follows:

- (a) The pilot hole location symbol includes a cross that indicates the location of the hole. The fastener diameter is indicated in the upper-right quadrant of the symbol, where X is the nominal diameter of the fastener that will be used for assembly or installation. The other three quadrants shall remain blank.
- (b) The pilot hole location symbol shall be used to indicate pilot hole locations shown on an engineering drawing such as detail, assembly, or installation drawings. Where engineering documentation does not establish hole specifications at the detail or assembly level of manufacture, the manufacturing information shall control when pilot holes are included on parts and, if included, the size of the pilot holes.

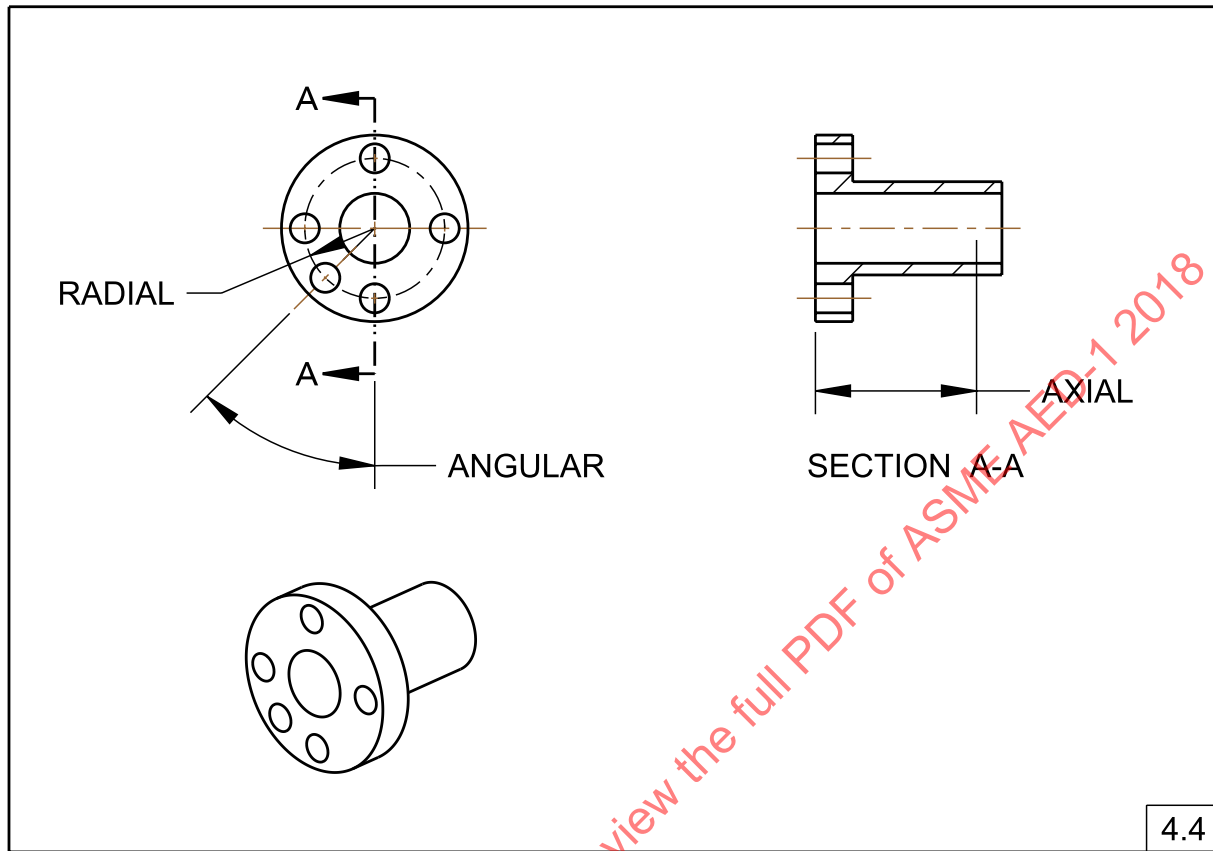Figure 4-4 Orientation and Direction of Dimensional Requirements

4.7 Optional Coverage

When a drawing indicates OPTIONAL or OPTL with regard to an area receiving surface treatment coverage, the indicated area(s) may have full, partial, or no surface treatment coverage applied in accordance with the surface treatment specification.

Where abrupt endings are not permissible within the optional coverage area, the drawing shall indicate it.

5 ASSEMBLY TOLERANCING

Assembly dimensioning and tolerancing pertain to the geometric control of component features that are only applicable on assembly product definitions. This section outlines the conditions necessary for such a practice to be valid.

The following two primary types of features need to be controlled with tolerance at an assembly level:

(a) *Existing Features With Adjustment at Assembly.* The component or subassembly containing the feature has freedom for adjustment during the assembly process to allow the specified feature to comply with the dimensional requirements after it is assembled as described in [para. 5.1](#).

(b) *Features Manufactured at Assembly.* Where the feature is to be manufactured after the component or subassembly has been assembled, all feature requirements that shall be met at the assembly level shall be wholly defined on the assembly drawing as described in [para. 5.2](#).

Tolerances applied at the assembly level for features that exist at the component or subassembly level shall be met without material removal. If material removal is allowed, it shall be noted on the drawing. For features that are defined at the assembly level, removal of material is permissible to meet the requirements. If no material removal is allowed to meet a specific requirement, it shall be noted on the drawing.

Figure 4-5 No-Arrow or Double-Arrow Option Methods

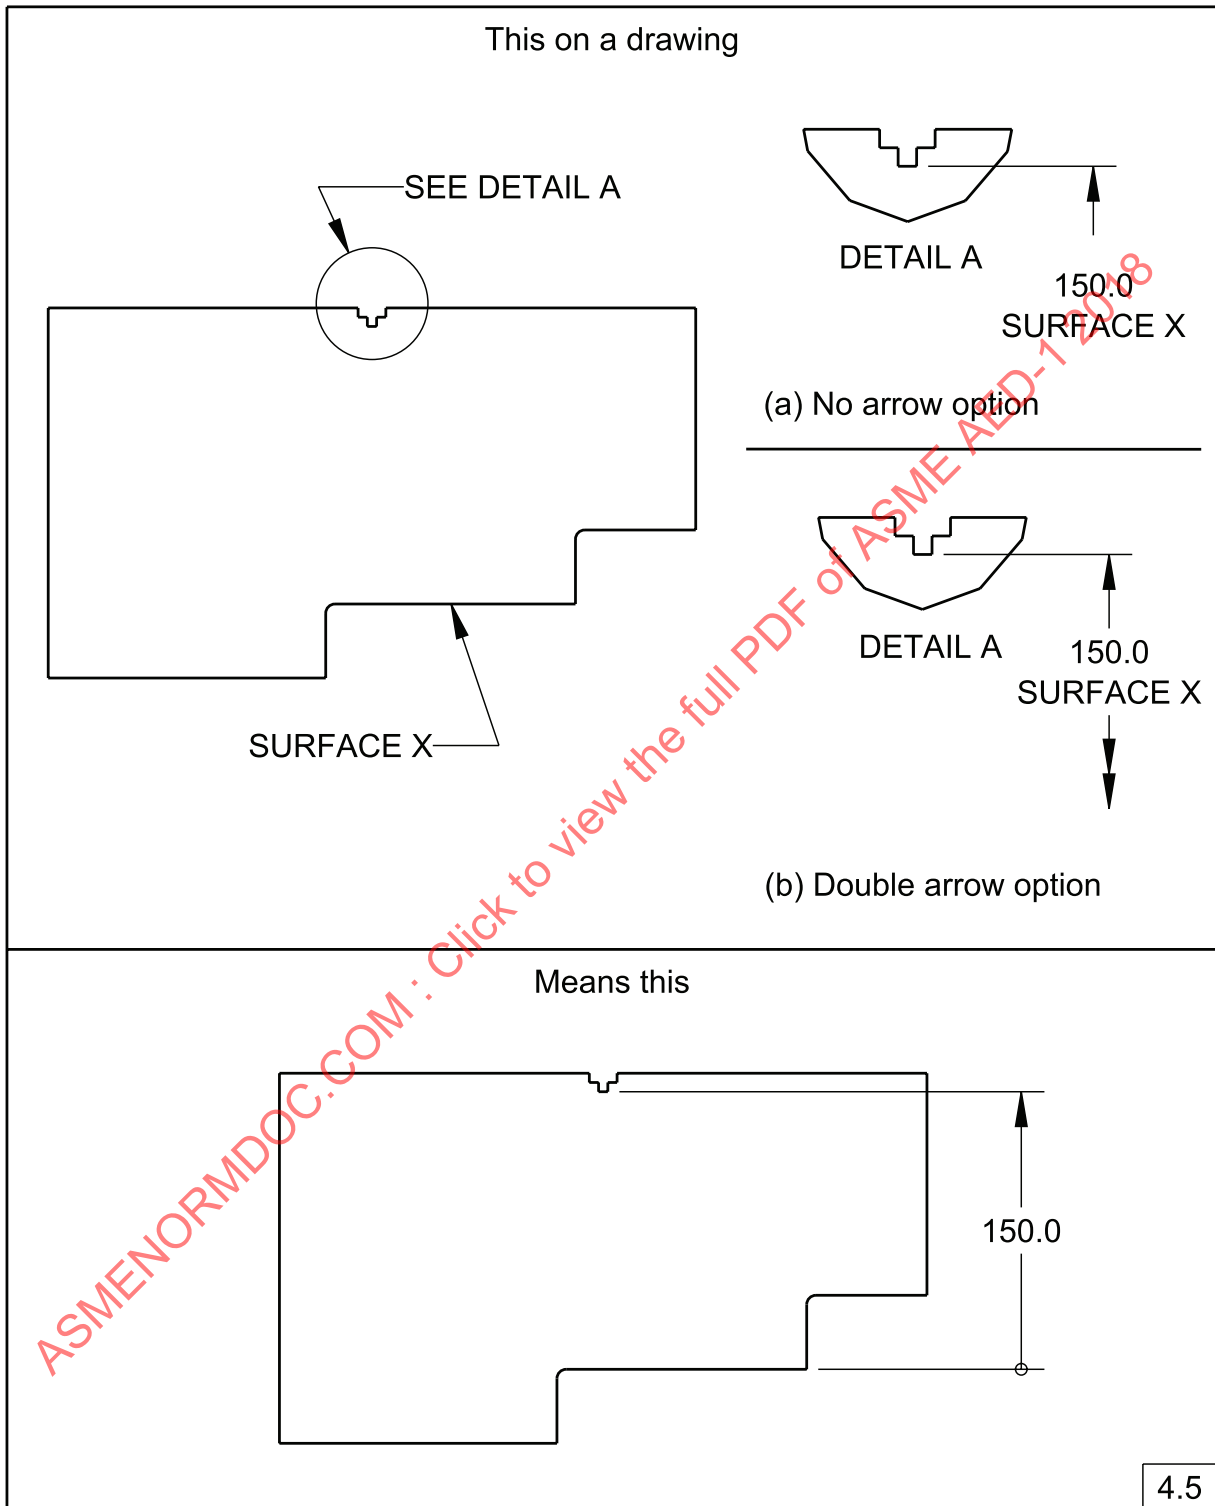
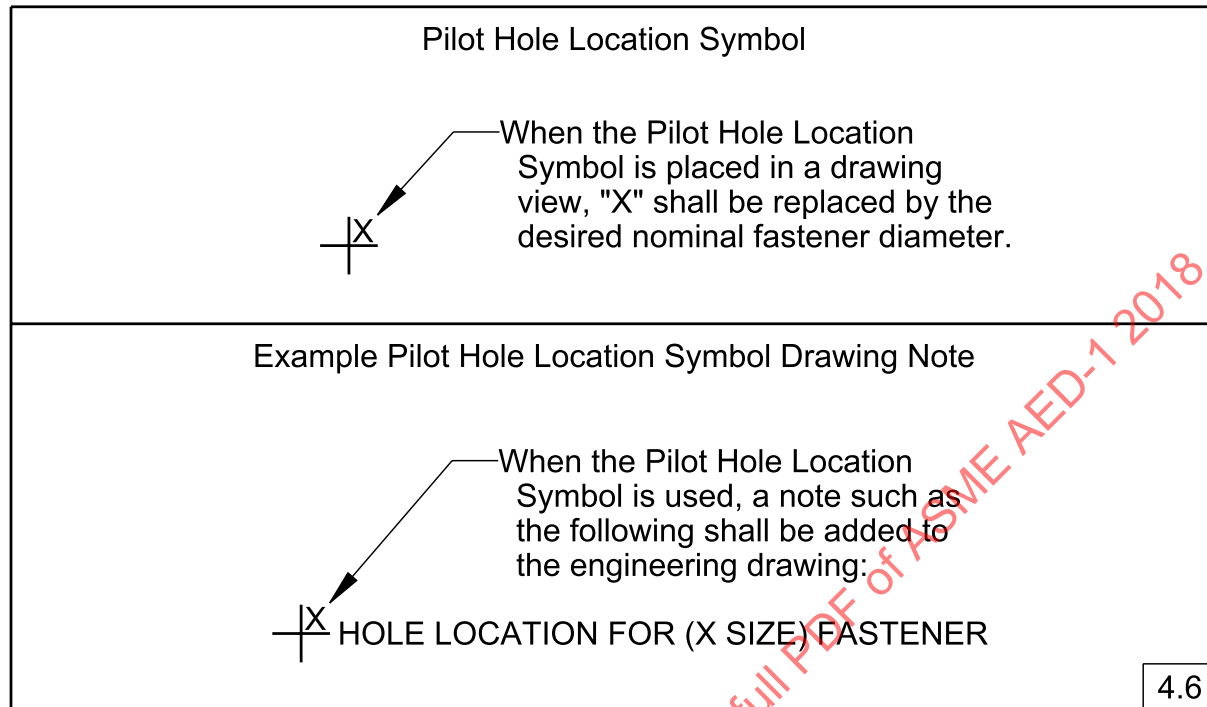


Figure 4-6 Pilot Hole Location Specification

5.1 Existing Feature Adjustment Tolerancing

Existing feature adjustment tolerancing is used when a feature is fully defined at a component or subassembly level and is also toleranced at the assembly level to meet a requirement different from that allowed by the component or subassembly dimensional requirements specified. The requirement shall be met without any material removal at the assembly. One example of this practice is to locate a feature from one part relative to a feature from a second part on a welded assembly. The features from each component are defined at a lower-level drawing and then the two components are welded as defined on the assembly drawing to meet the location requirement after welding.

In the example shown in [Figure 5-1](#), the location of the bushings bonded to a plate is controlled by existing feature adjustment tolerances. The location of the bushing inner diameter in the plate is controlled with less variation than the hole in which it is bonded.

5.2 Manufactured at Assembly Tolerancing

Manufactured at assembly level tolerancing is used when a feature is manufactured at the assembly level. Under these conditions, the feature shall be controlled in accordance with ASME Y14.5. One example of this practice is machining mounting holes into a weldment after all the welding operations are complete. Since the holes do not exist on a lower-level drawing (or may not be at the finished size), they are to be shown in the appropriate views, when applicable, and dimensioned accordingly on the assembly level drawing.

5.3 Assembly Level Datums

Any feature or combination of features that would be a valid datum feature on a detail part can be used as a datum feature on an assembly. The datum feature shall be identified the same way as it would on a detail part. See ASME Y14.5 for requirements regarding indication and placement of datum feature symbols. Datum features on detail parts that are also used as datum features on assemblies do not need to maintain the same datum letter.

5.3.1 Surface Features as Datum Features. A feature that is not a feature of size can be designated as a datum feature on an assembly drawing using the same methods employed on detail parts. Consideration should be given to qualifying datums at the assembly level with form, orientation, or location control, as applicable, to account for the effects of any processes used to create the assembly.

Figure 5-1 Existing Feature Adjustment Tolerancing Example


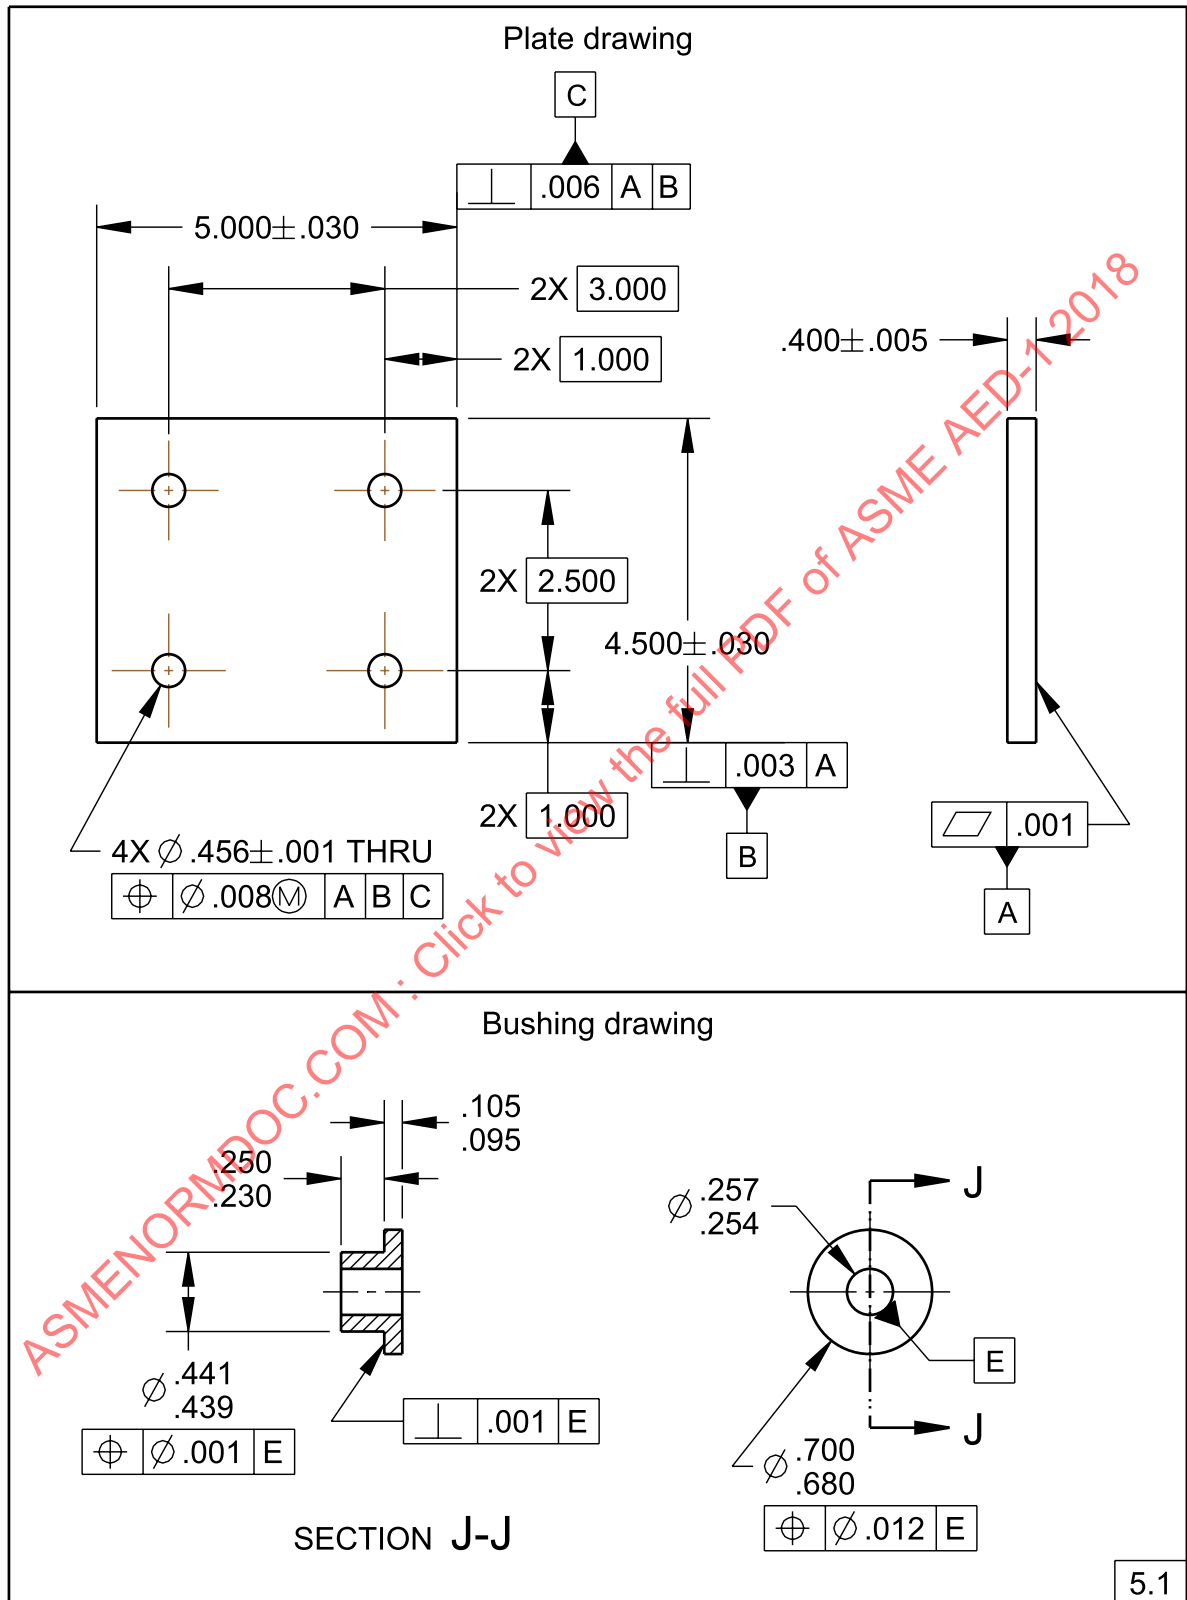


Figure 5-1 Existing Feature Adjustment Tolerancing Example (Cont'd)

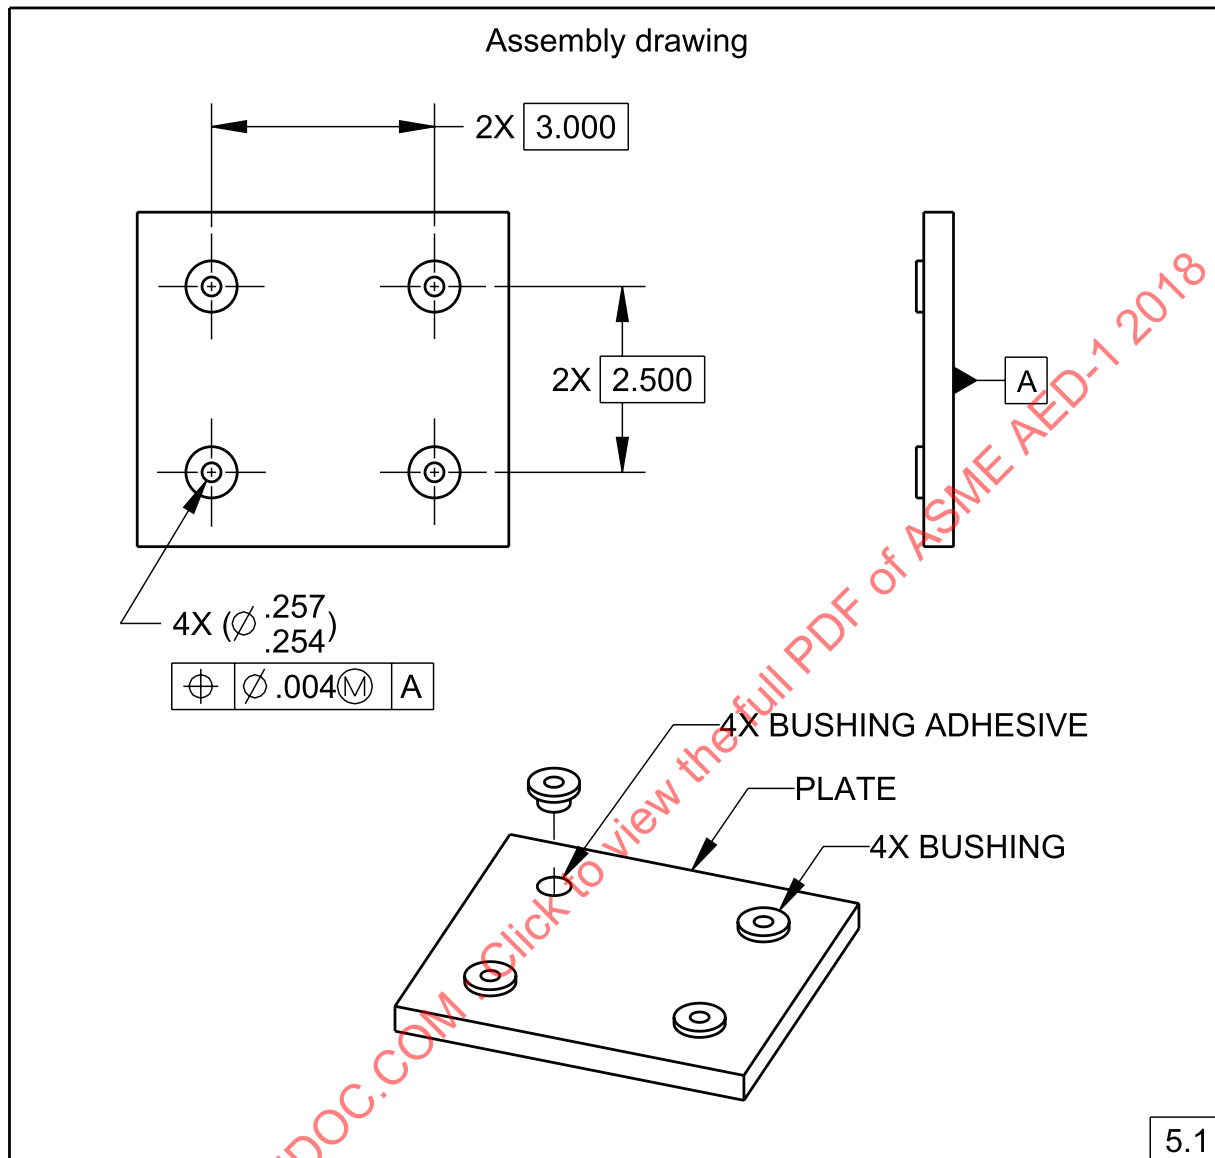

5.3.2 Features of Size as Datum Features. A feature of size can be designated as a datum feature on an assembly drawing in much the same way as it is on a detail part, subject to the considerations described in [paras. 5.3.2.1](#) and [5.3.2.2](#).

5.3.2.1 Datum Features Created at a Lower Level. When a feature of size, defined at the component or subassembly level, is to be designated as a datum feature at either MMB or LMB on an assembly drawing, sufficient information shall be provided on the assembly level drawing to establish the MMB and LMB boundaries for the assembly level datum. This may be accomplished by either of the following methods:

(a) *Reference Method.* The size dimension and tolerance, as defined on the component or subassembly drawing, shall be shown as reference information on the assembly drawing. See [Figure 5-2](#). When a datum feature of size is to be referenced as the secondary or tertiary datum, the geometric tolerance that establishes the inner and outer boundaries (MMB and LMB) of the feature of size is associated to the reference dimension. The geometric tolerance may be a restatement of the geometric tolerance from the component or subassembly that defined the feature. If the geometric tolerance is not a direct restatement of the original callout, it shall be consistent with the original callout on the component or subassembly. For a geometric tolerance to be considered reference information, the abbreviation “REF” shall be noted adjacent to the feature control frame. Without the “REF” designation, the feature control frame establishes a new requirement for the feature at the assembly level.

(b) *Applicable Condition Method*. For this method, the value of the boundary may be stated, enclosed in brackets, following the applicable datum reference and modifier in the feature control frame in accordance with ASME Y14.5. See Figure 5-3.

5.3.2.2 Produced at the Assembly Level. When a feature of size produced during assembly is designated as a datum feature, it shall be fully defined per ASME Y14.5.

5.4 Aggregate Datum

The aggregate features of the designated aggregate datum restrict one or more degrees of freedom without affecting any inherent motion within the assembly. An aggregate datum with no inherent motion shall be identified per para. 5.4.1 and specified in a feature control frame per ASME Y14.5. An aggregate datum with inherent motion shall be identified per para. 5.4.1 and specified in a feature control frame per para. 5.4.2. Where aggregate datum features are accessible, a physical datum feature simulator should be used. Where aggregate datum features are not accessible with a physical datum feature simulator, the combined effect of the assembly acts as the physical datum feature simulator.

5.4.1 Identifying an Aggregate Datum Feature. The aggregate datum feature symbol is the letters “AG” within a hexagon. See Figure 1-1. An aggregate datum feature symbol shall be associated with at least one of the features used to derive the aggregate datum. The aggregate datum feature symbol or the word “AGGREGATE” shall be placed next to the datum feature symbol. See Figure 5-4.

5.4.2 Identifying Inherent Motion of an Assembly. The inherent motion of the assembly shall be indicated by

- (a) a datum reference frame symbol placed with at least one of the axes aligned with the inherent motion
- (b) the appropriate degree of freedom symbol placed after the aggregate datum feature reference letter in the feature control frame
- (c) an asterisk placed after the degree of freedom symbol to indicate motion direction or freedom rather than the motion constraint default per ASME Y14.5

A note may be used to clarify movement or method on how the assembly is to be restrained.

For an assembly with motion, at least one full cycle of the movement is required for verification, UOS. See Figure 5-4.

6 ADDITIONAL DRAWING PRACTICES

6.1 Blind Holes

6.1.1 Blind Hole Callout. The blind hole symbol may be used to indicate a blind hole. See Figure 1-1.

When the blind hole symbol is used, the acceptable boundaries of the hole bottom configuration shall be as shown in Figure 6-1 for a blind hole or Figure 6-2 for a blind hole with a through hole.

6.1.2 Drill Point Defined by Callout. The preferred drill point may be indicated with a modified blind hole symbol as shown in Figure 1-1. See Figure 6-3 for a 135-deg drill point callout example.

6.2 Edge Breaks

When the term “EDGE BREAK” or another edge break callout is specified, the edge break may take the form of a radius, a chamfer, or a combination of both. See Figure 6-4 for edge break examples.

If a blend is required between the flat surface permissible in the edge break tolerance zone and the adjacent surfaces to eliminate abrupt changes in material topography, the blend shall be specified. It could be a radius, a partial ellipse, or a combination of both.

Edge breaks may be produced in any manner that is not otherwise restricted by the design authority. Where an edge break is specified with only a high limit size, e.g., .030 MAX, the lower limit shall be interpreted as having no measurable size; however, burrs and sharp edges that may cause a cut-type injury are not permitted.

6.3 Radius

Radius tolerance and controlled radius tolerance of ASME Y14.5 are amended as described in paras. 6.3.1 through 6.3.4.

6.3.1 Radius Tolerance. A radius symbol, R, creates a zone defined by two arcs (the minimum and maximum radii). The part surface shall lie within this zone. Where the center of the radius is located via dimensions, the arcs are concentric. See Figure 6-5. Where the center of the radius is not located (tangent located), the arcs create a crescent-shaped tolerance zone whose “width” is set by placing both the maximum and minimum radii tangent to the adjacent surfaces. See Figure 6-6.

Figure 5-3 Applicable Condition Method

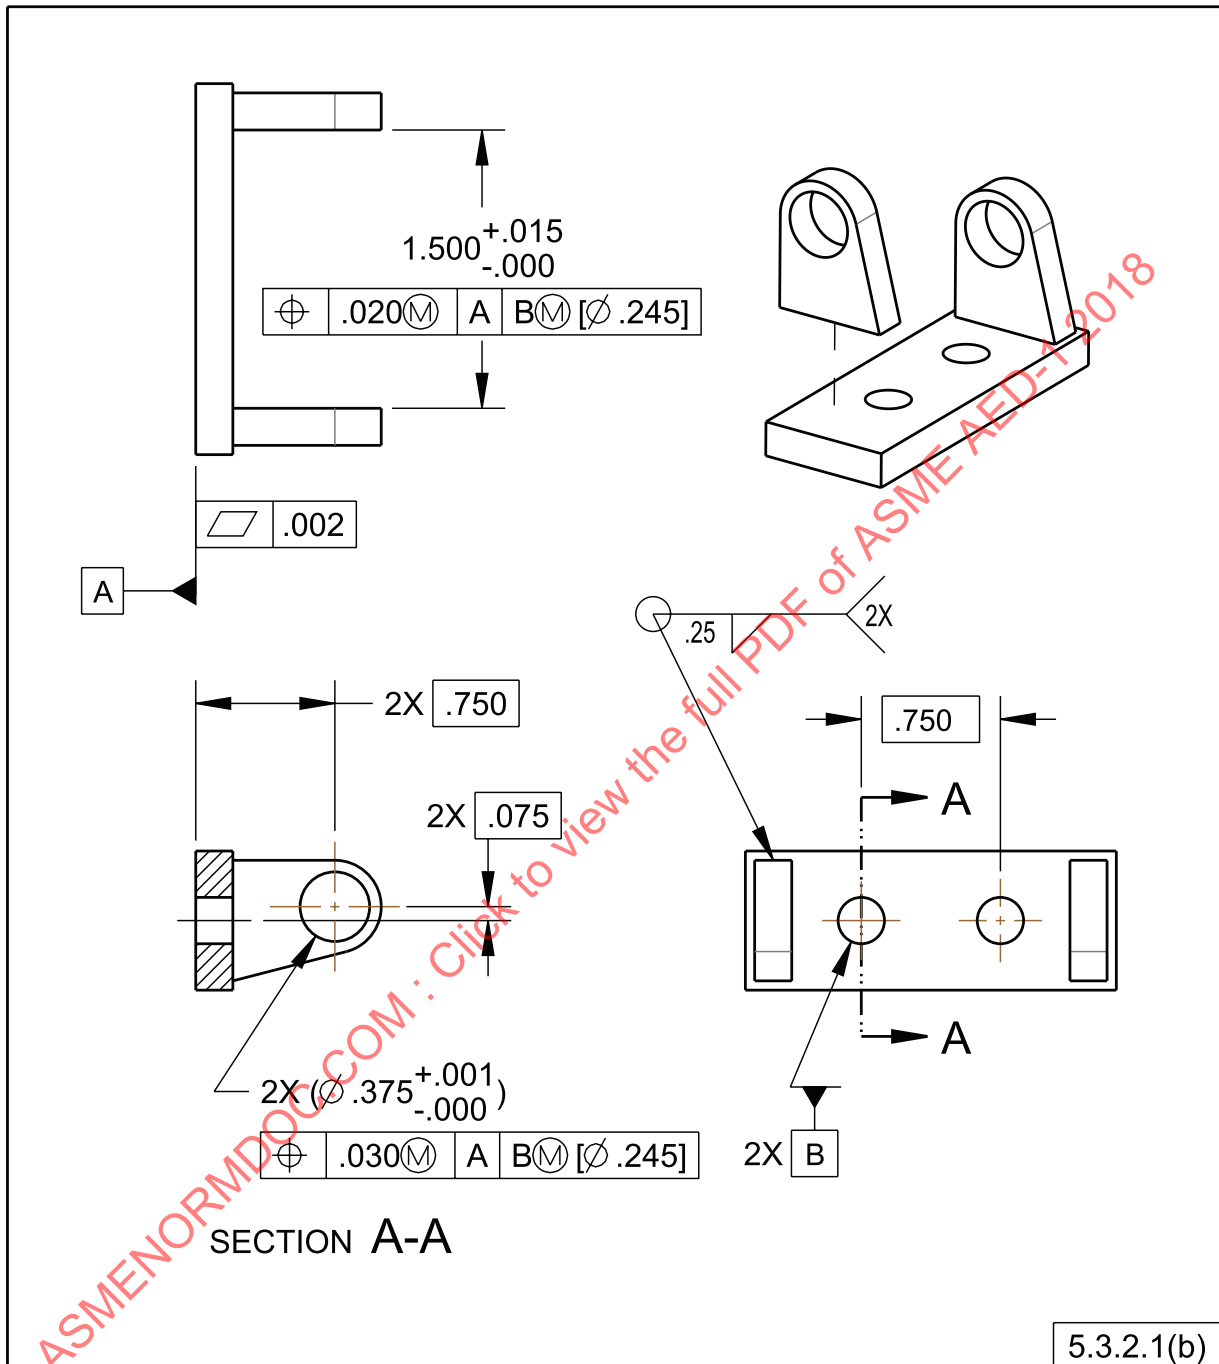


Figure 5-4 Aggregate Datum With Inherent Motion in the Assembly



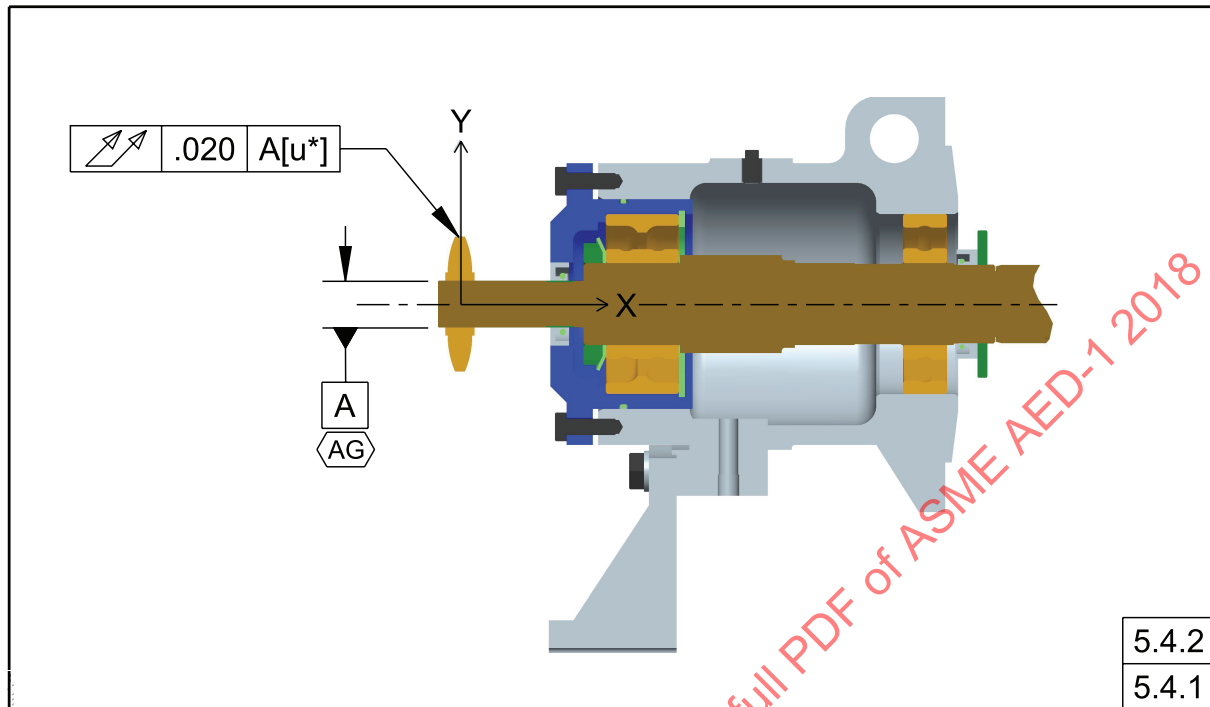


Figure 6-1 Blind Hole

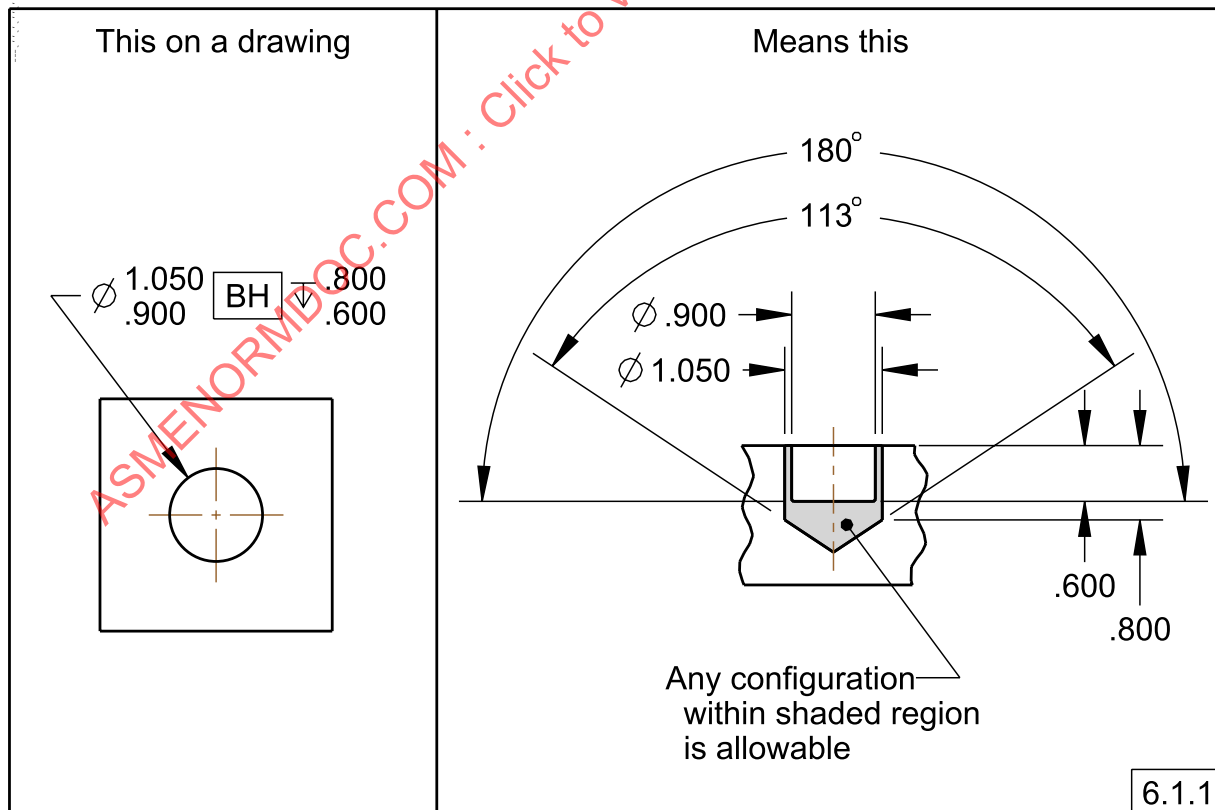


This on a drawing

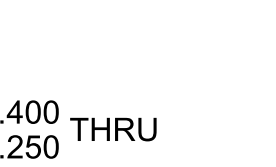

$\varnothing .400$
 $\varnothing .250$ THRU
 $\varnothing 1.080$ [BH] $\nabla .800$
 $\varnothing .920$ $\nabla .600$

Means this

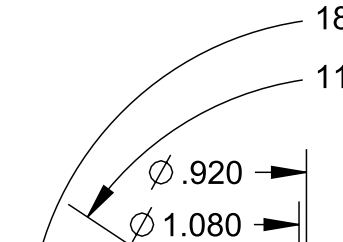

180°
 113°
 $\varnothing .920$
 $\varnothing 1.080$
 $\varnothing .400$
 $\varnothing .250$
 $.600$
 $.800$
 Any configuration within shaded region is allowable

6.3.4 Radius Tangencies. The surface of a radius near its visual tangency shall conform to the tolerance of the adjacent feature, the appropriate radius tolerance zone (crescent or concentric arcs), or both. See [Figure 6-8](#) for an external tangency radius or [Figure 6-9](#) for an internal tangency radius.

(d) When all dimensions of a view or section are dimensioned in this way, a note such as “ALL DIMENSIONS ARE TRUE” may be added to the view callout. See [Figure 6-11](#).

Figure 6-3 135-deg Drill Point Callout Example

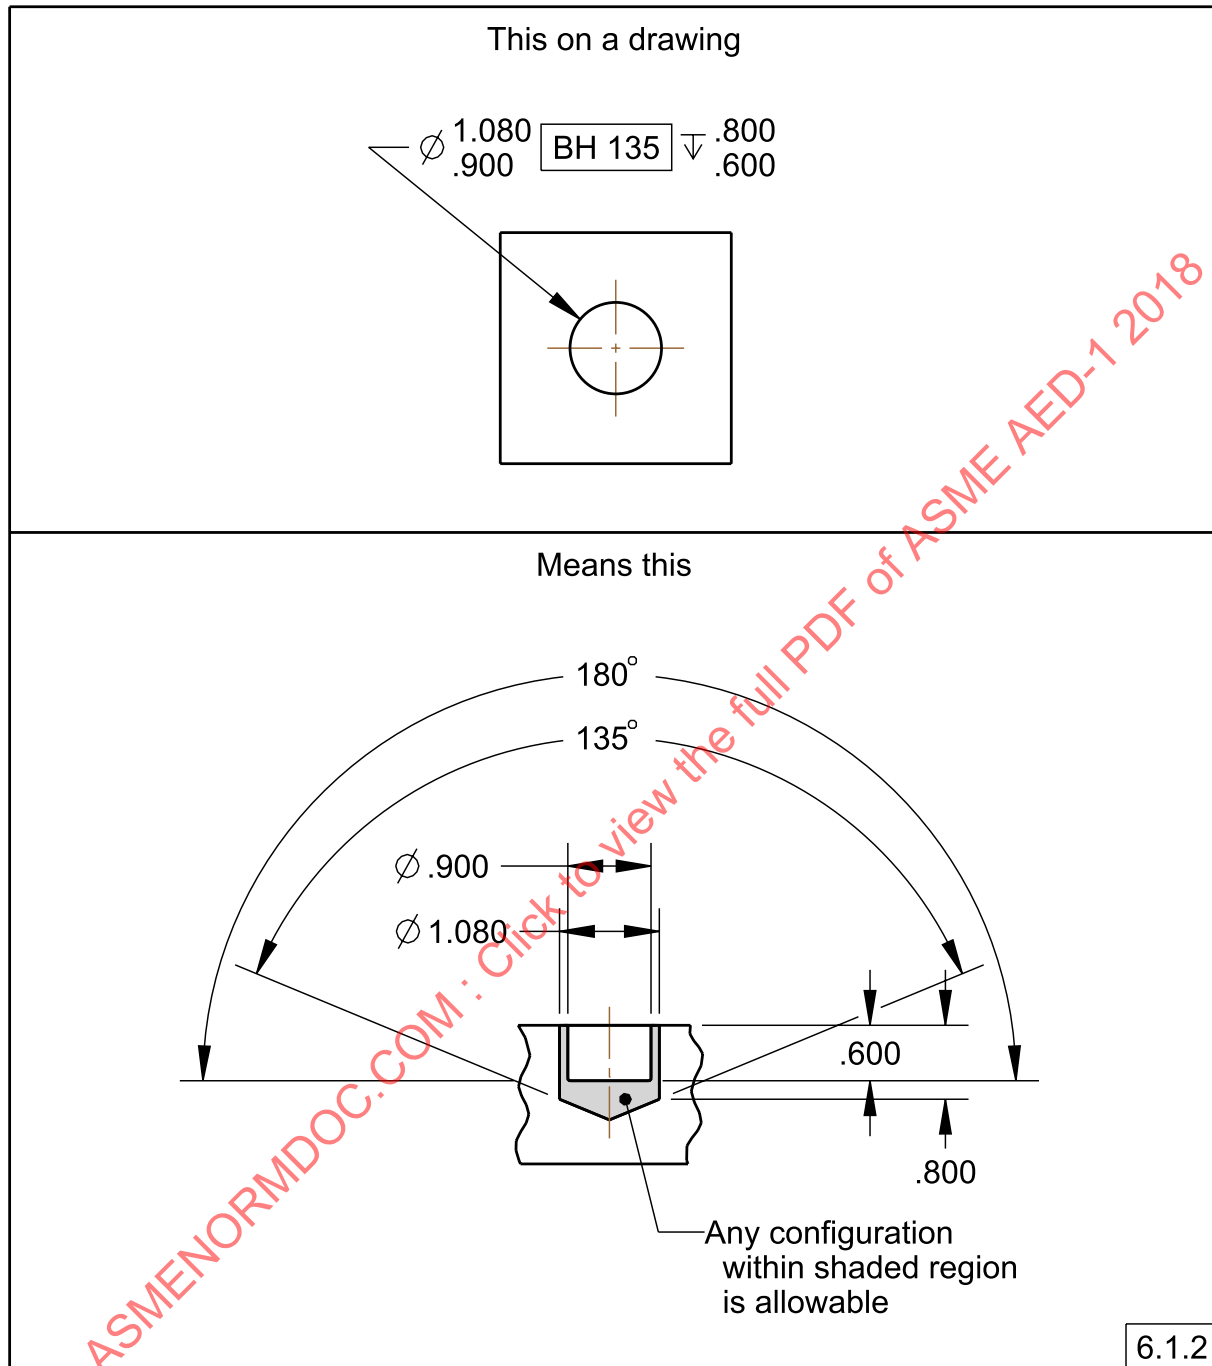


Figure 6-4 Edge Break Examples

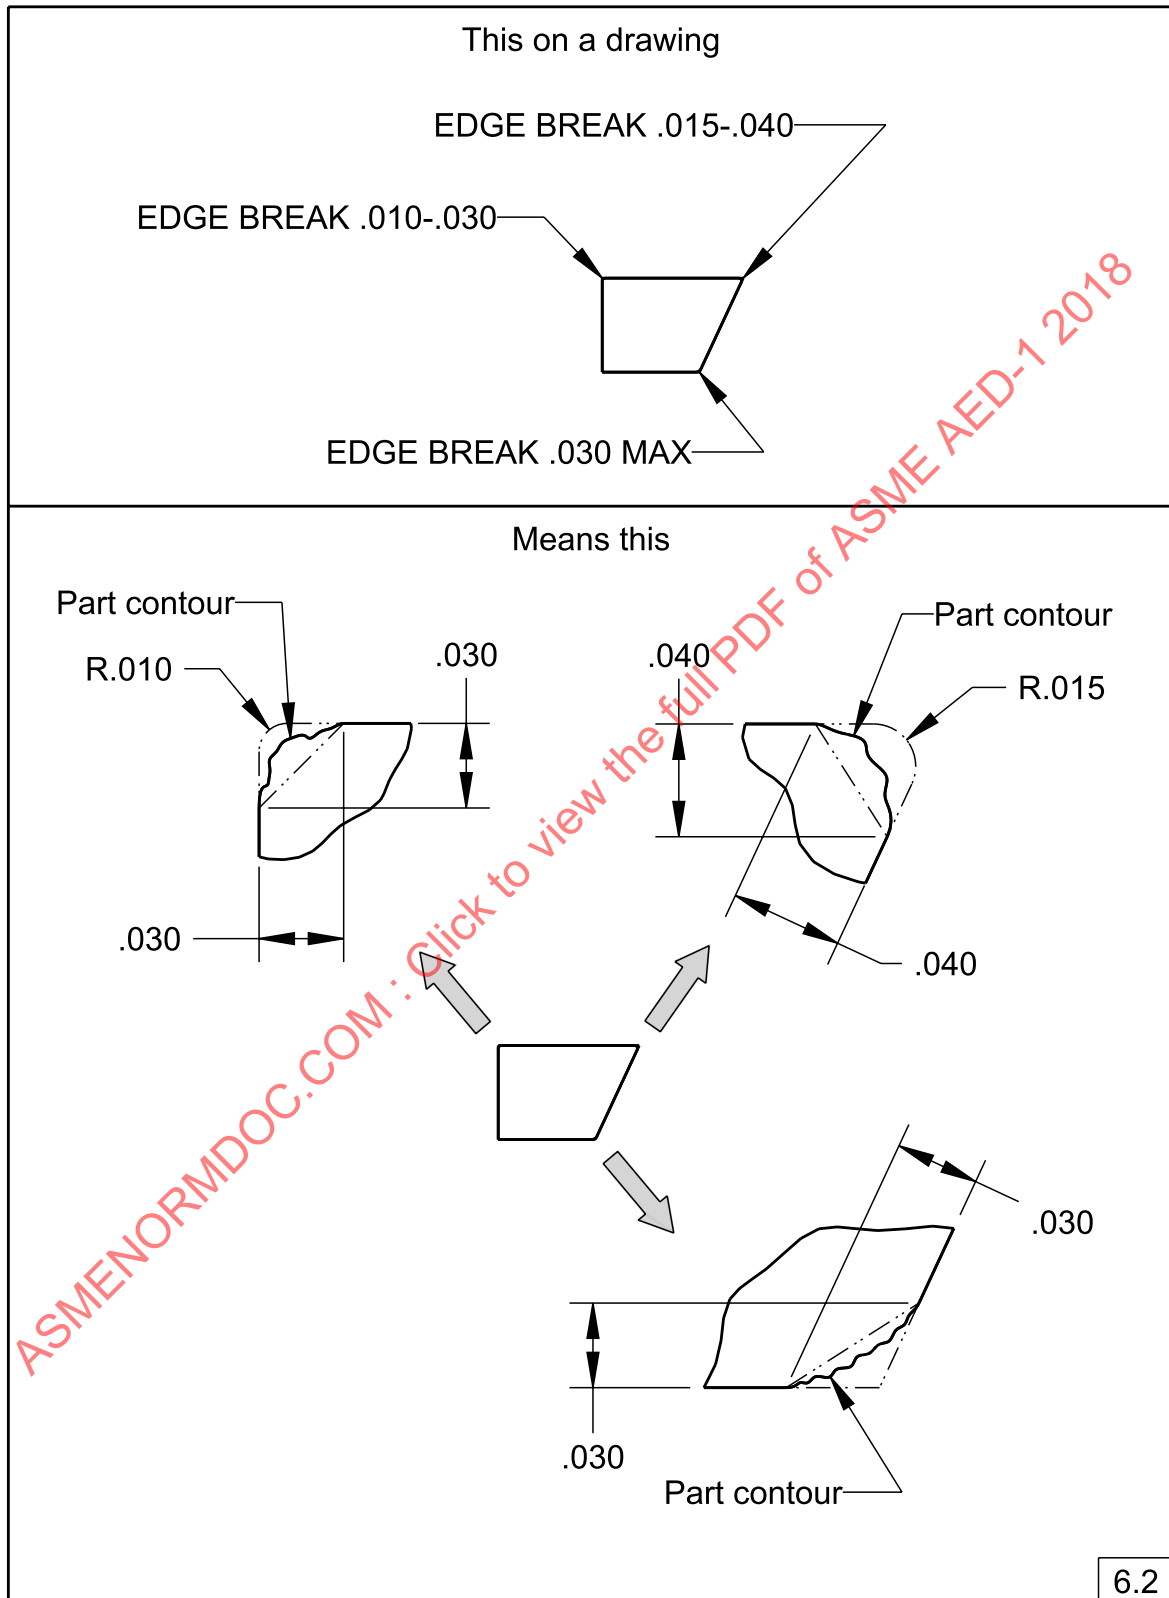


Figure 6-5 Center-Located Radius

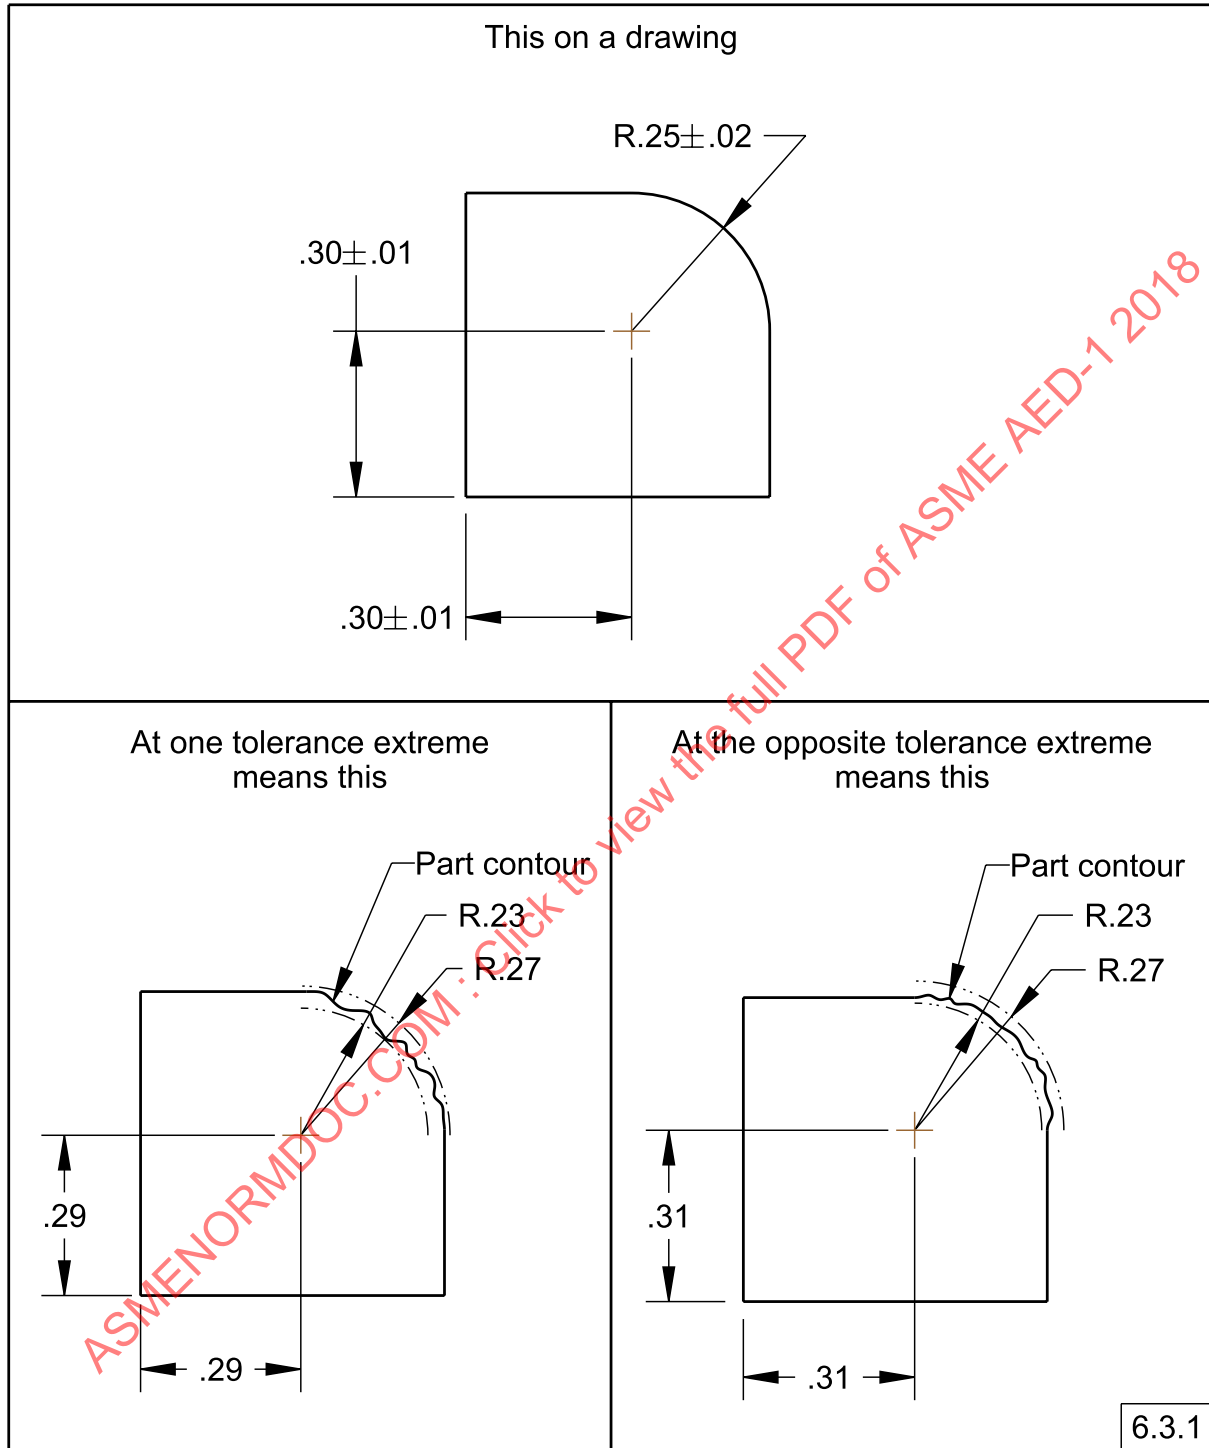


Figure 6-6 Tangent-Located Radius

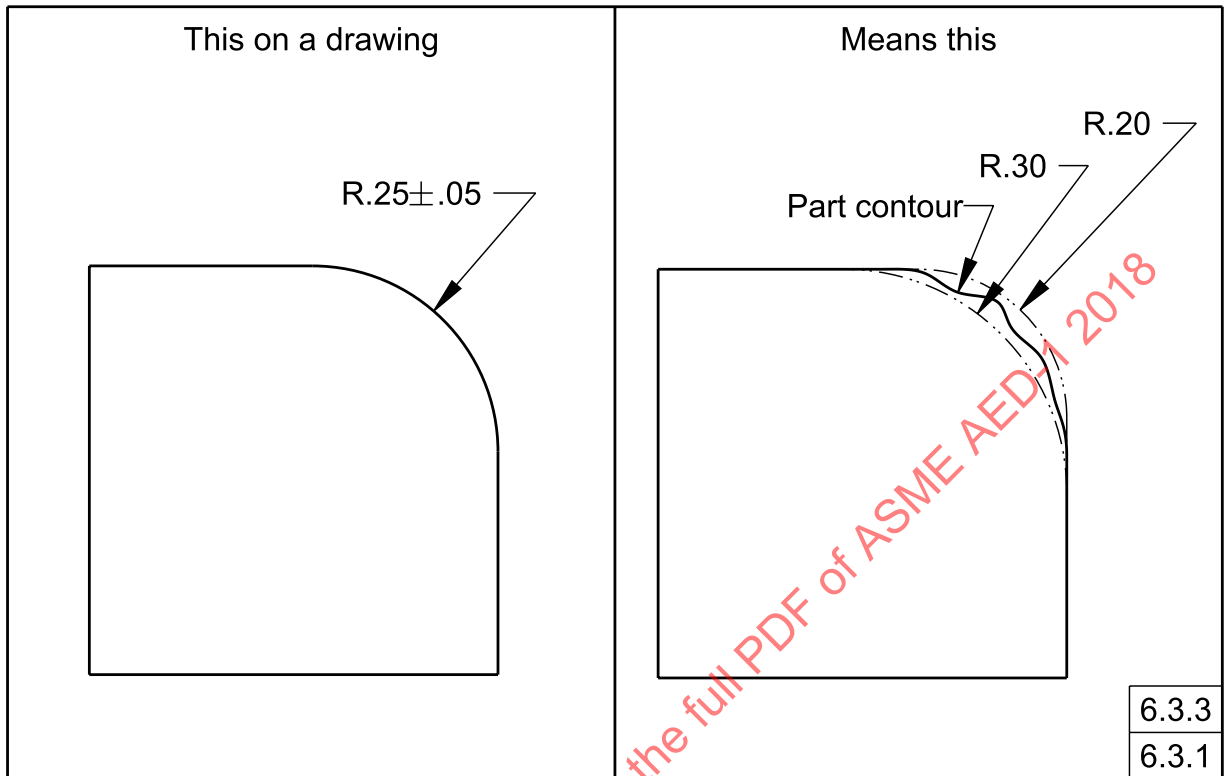


Figure 6-7 Controlled Radius

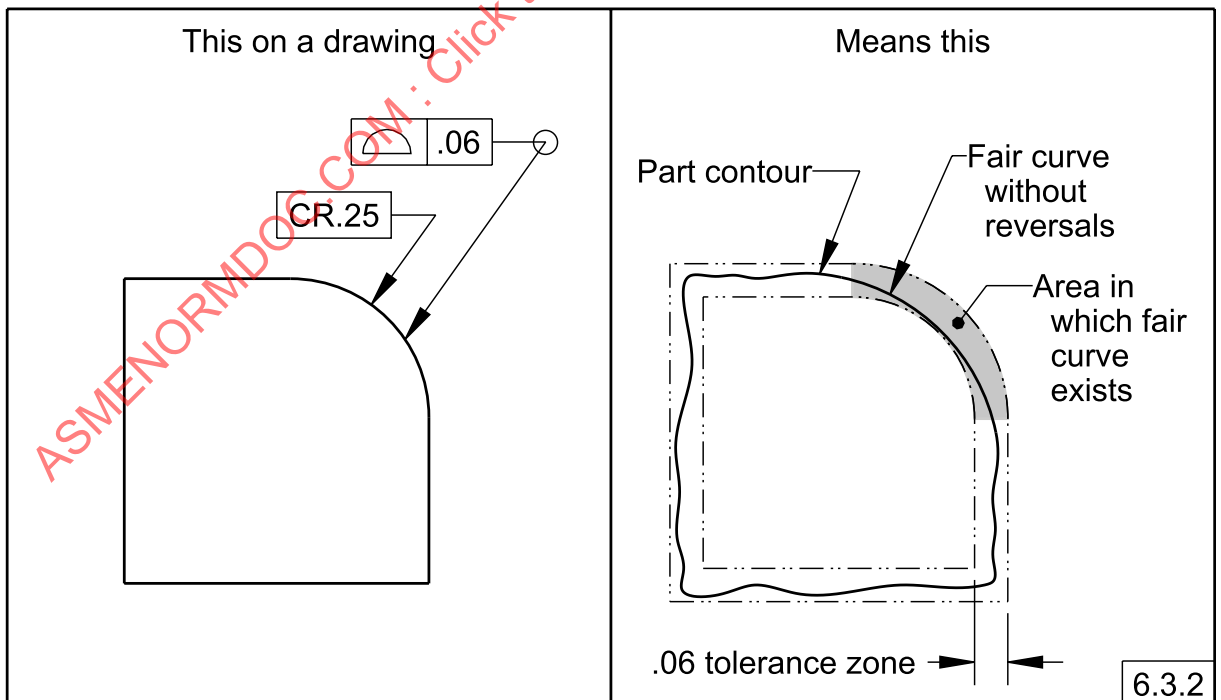





Figure 6-8 External Radius — Permissible Termination

Figure 6-9 Internal Radius — Permissible Termination

A corner tangency radius applied to a part



Is allowed to be out of tangency by this amount

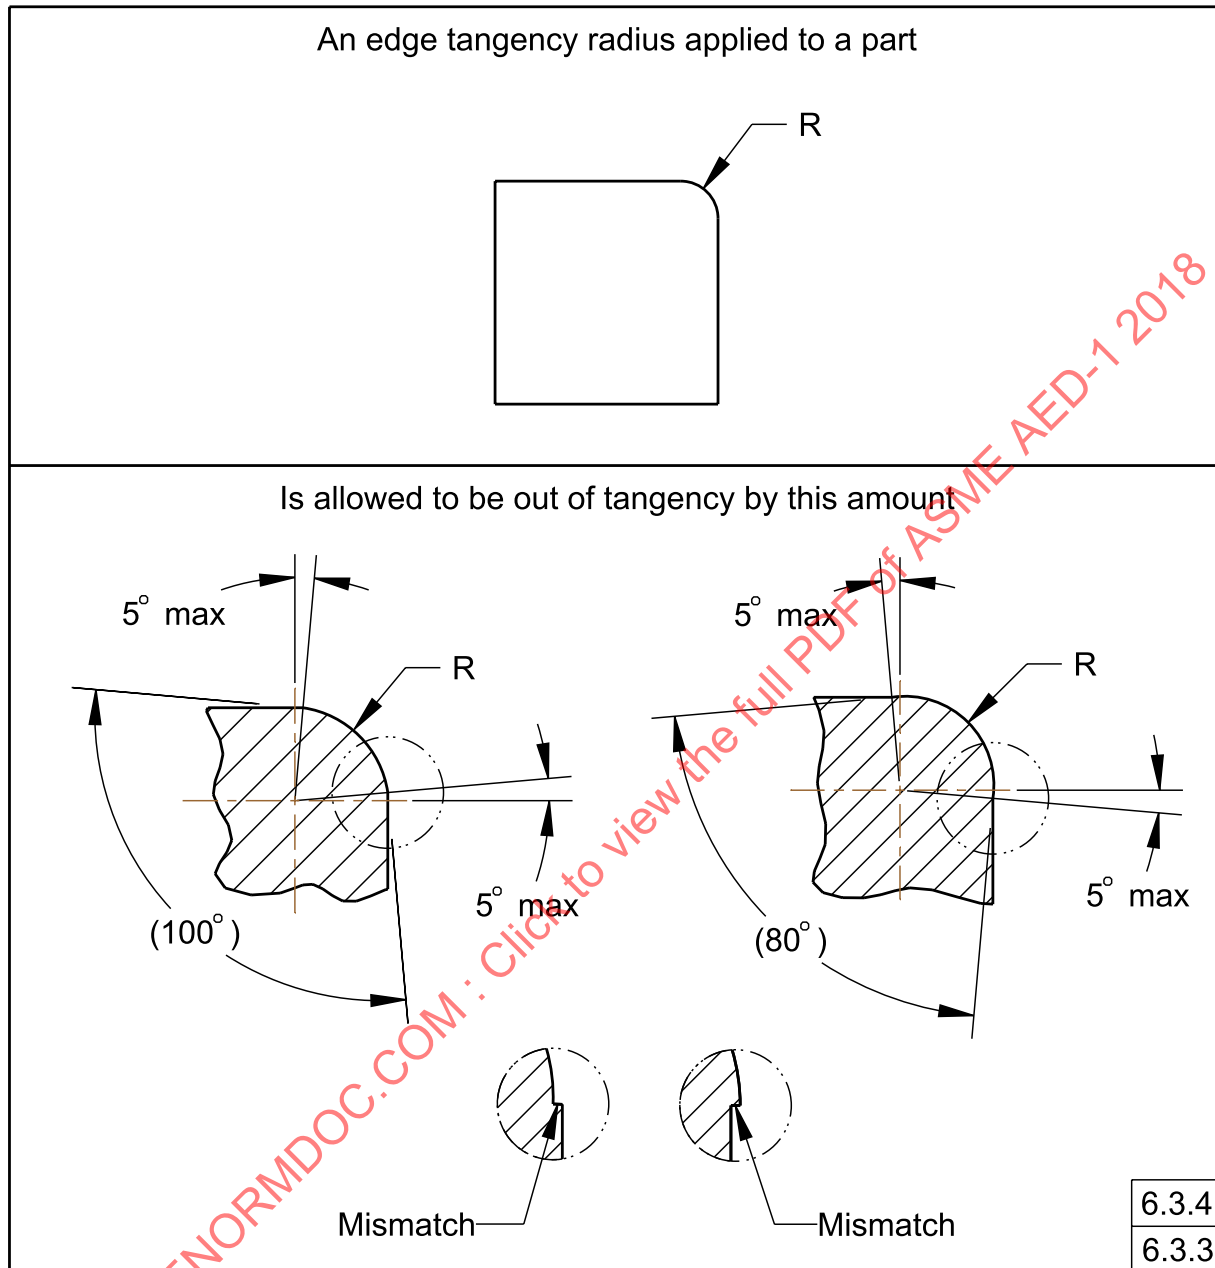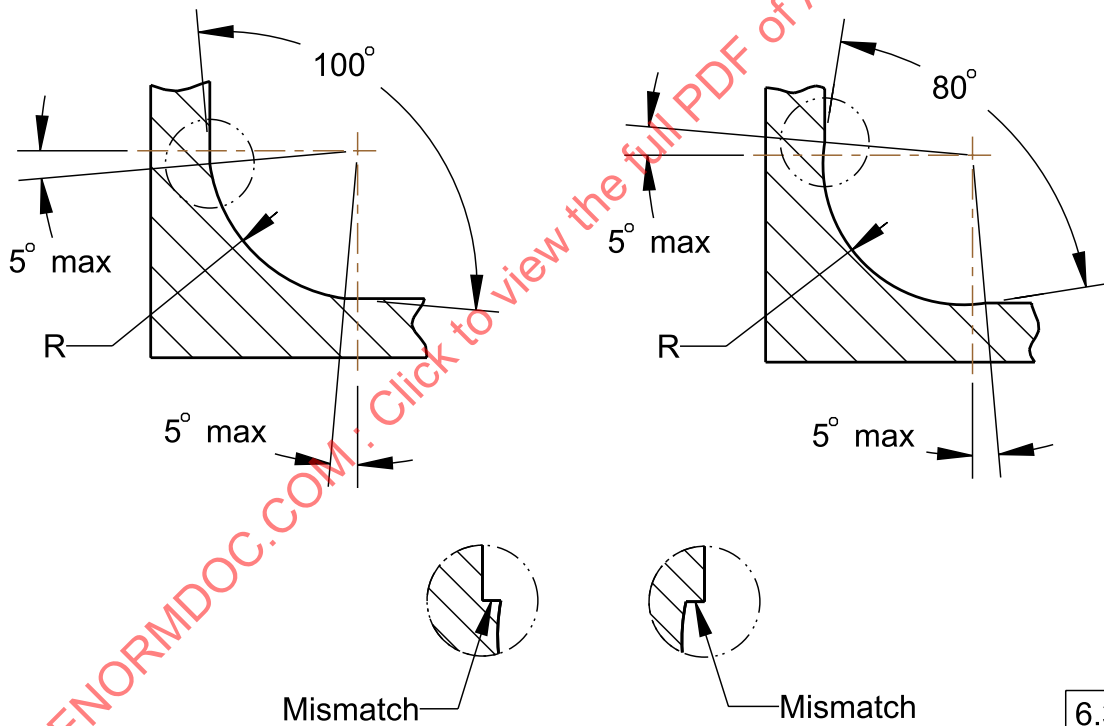

6.3.4

6.3.3

Figure 6-10 Views With True Dimensions

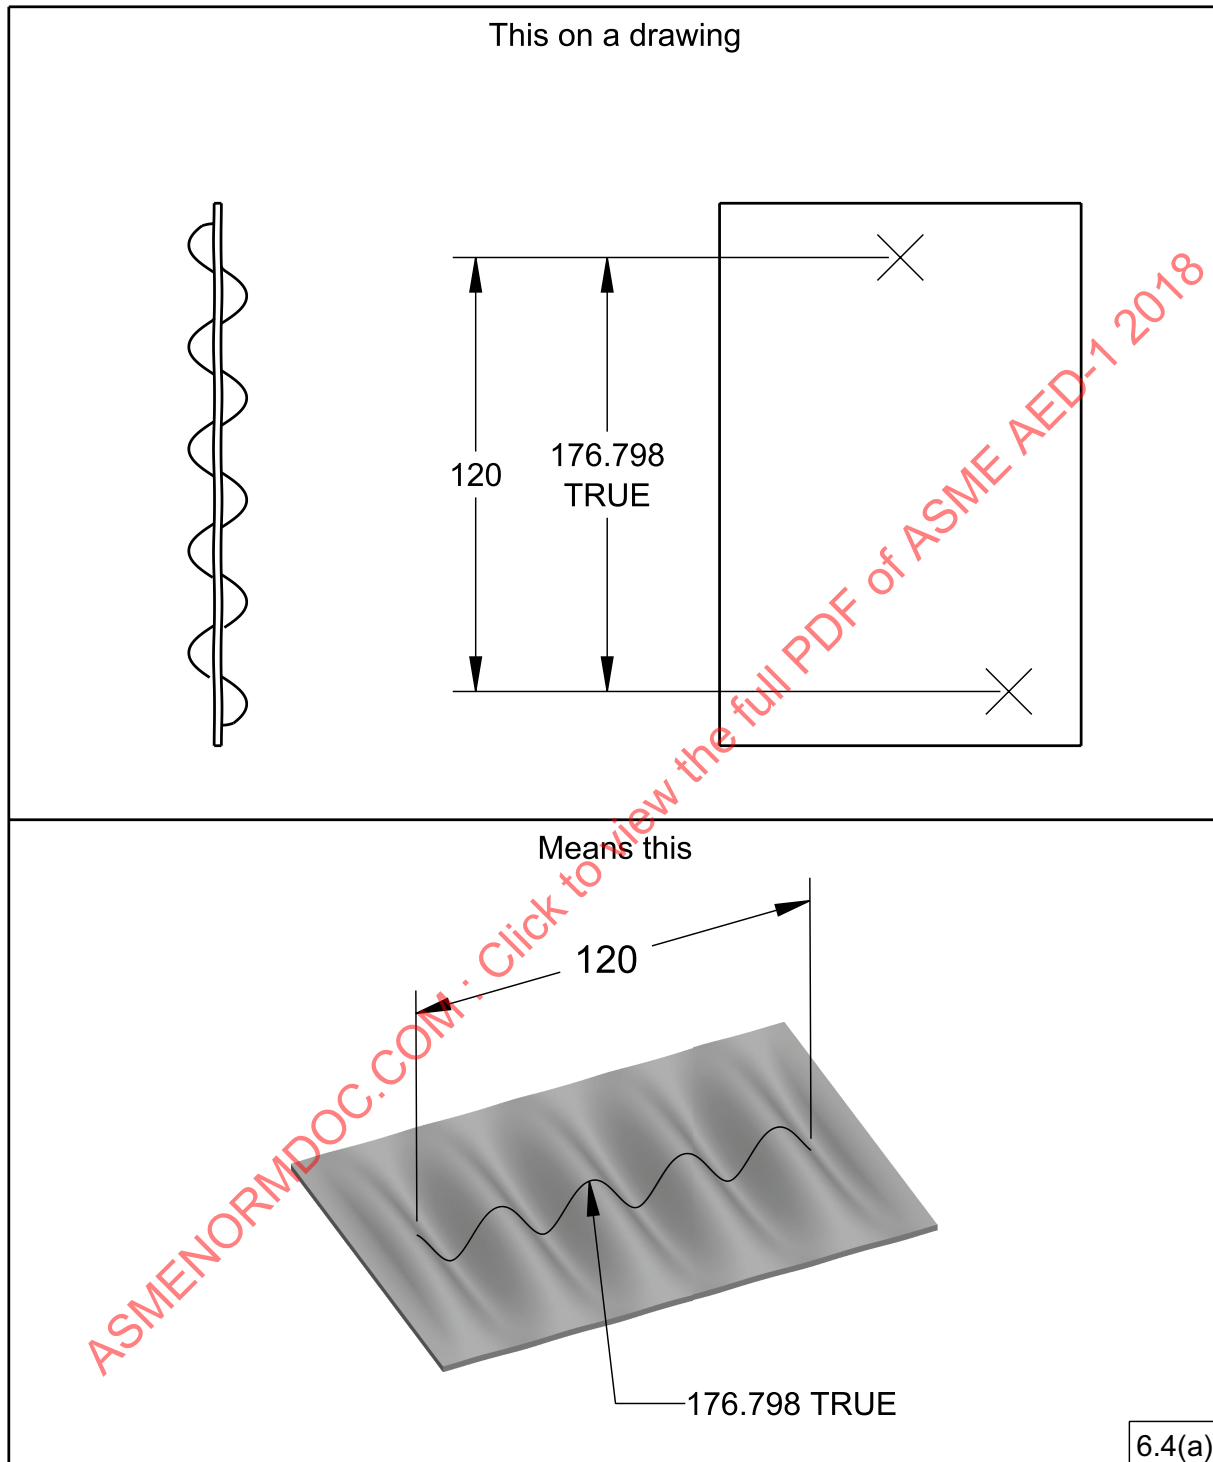


Figure 6-11 Views With All Dimensions True


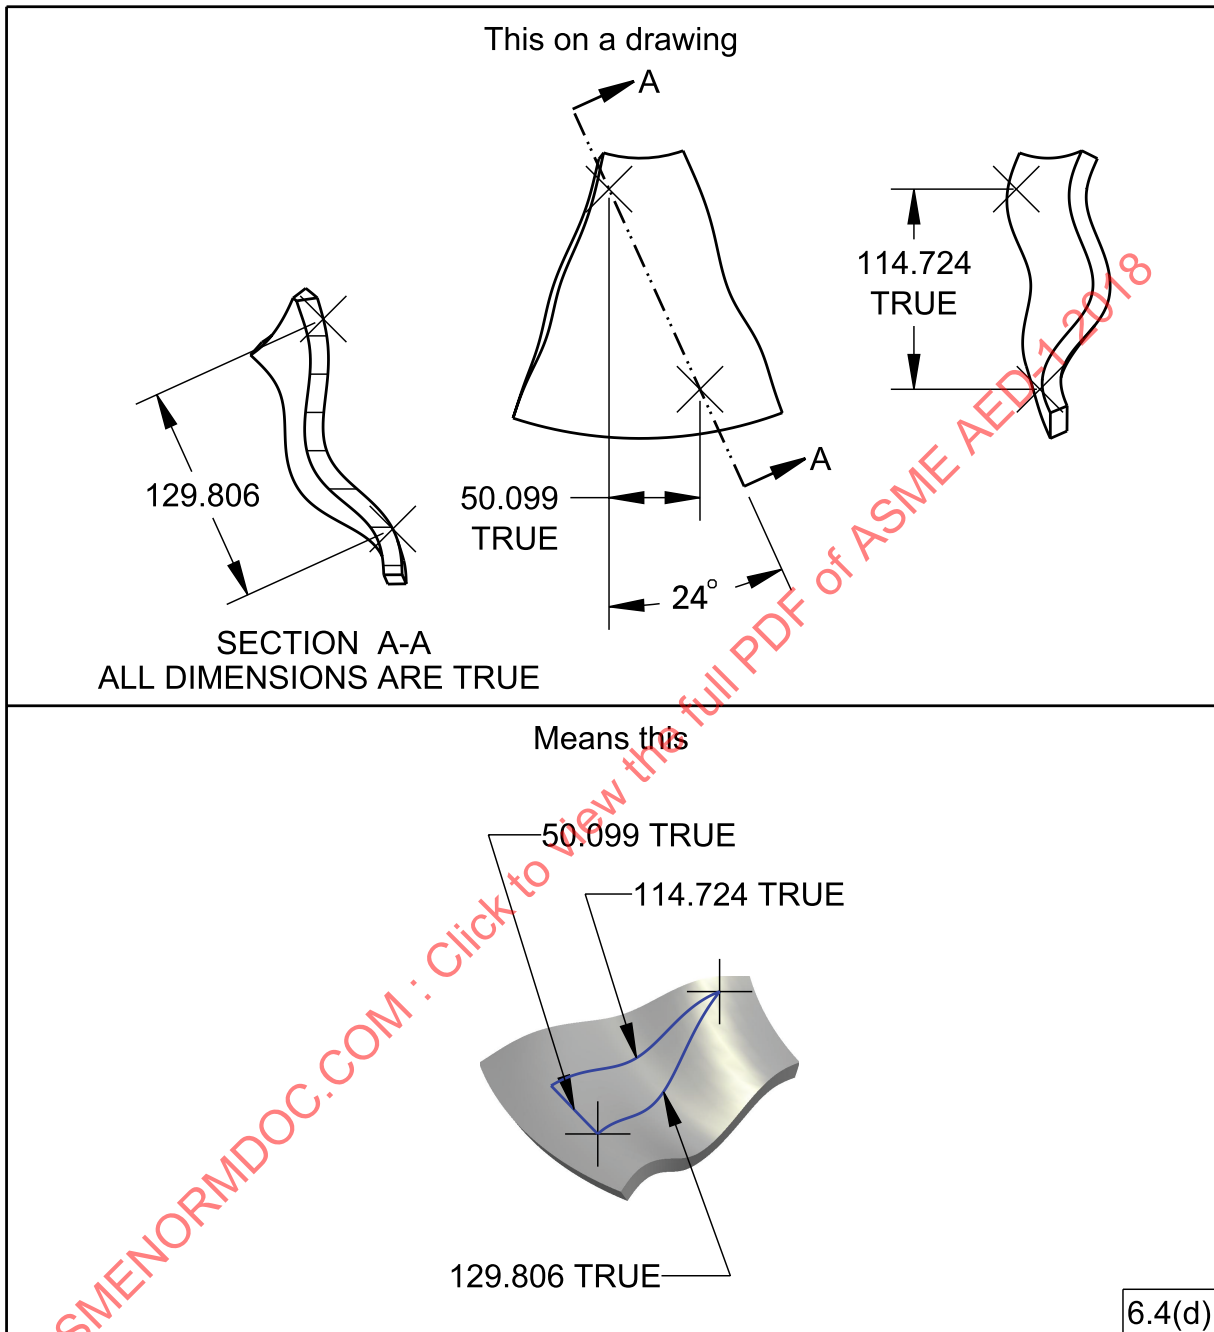


Figure 6-12 Parabola Tangency

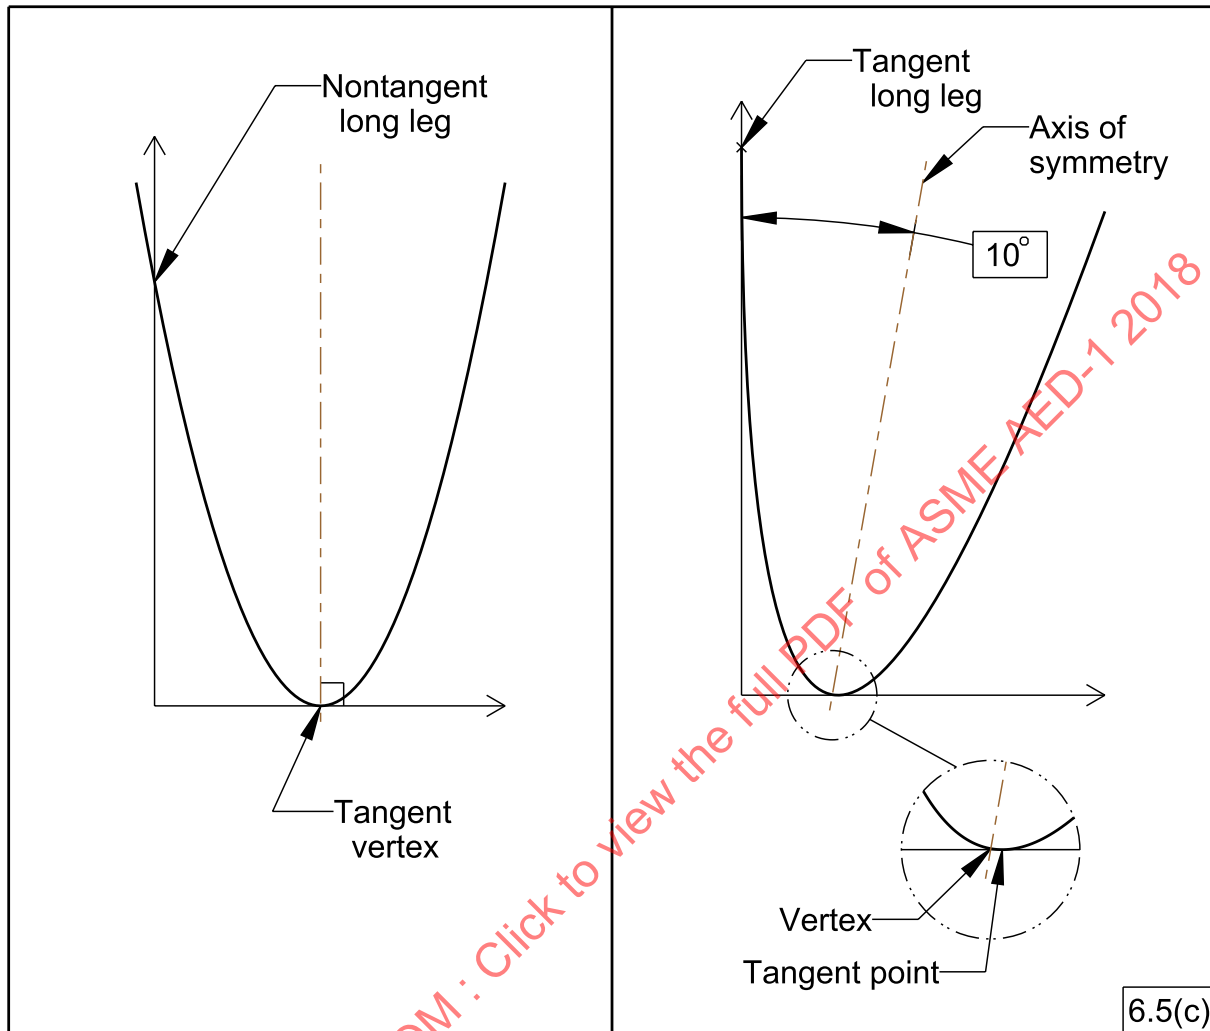

6.5 Parabolic Fillets

(a) Parabolic fillets are a concave easing of a corner or convex easing of an edge of a part typically used to reduce stress concentration. The cross section of a parabolic fillet is a parabola instead of a constant arc. This provides greater strength characteristics than a fillet radius in a direction parallel or nearly parallel to the axis of symmetry.

(b) General applications for parabolic fillets include areas where a circular arc of sufficient size to mitigate stress reduction is not feasible, and where the strength requirement in one direction is greater than in another.

(c) Due to the geometric definition of a parabola, the axis of symmetry for a parabola cannot be perpendicular to either blending surface when the surfaces meet at a 90-deg angle. Additionally, a parabola cannot be tangent to any surface parallel to the parabola's axis of symmetry. For these reasons, the axis of symmetry shall be set to an angle other than 0 deg from the adjacent surface to the long leg of the parabolic fillet. See Figure 6-12.

(d) A parabolic fillet is expressed using three terms in the following order: length of long leg as measured parallel to the surface adjacent to the long leg, length of short leg as measured perpendicular to the surface adjacent to the long leg, angle between the surface adjacent to the long leg and the parabola's axis of symmetry.

(1) The parabolic fillet angle is between 0 deg and 90 deg. A parabolic fillet whose axis of symmetry is parallel to the surface adjacent to the long leg of the fillet has an angle of 0 deg.

(2) Similar to a radius, the included angle of the adjacent surfaces of a parabolic fillet shall be dimensioned using the product definition.

(3) The dimension of a parabolic fillet shall be expressed as a basic dimension by being enclosed in a basic dimension symbol.

(4) At least one leg of the parabolic fillet shall be dimensioned to clarify the fillet's orientation. When used to relieve stress concentrations, the long leg of the parabolic fillet should correspond to the direction of the major fatigue load. See Figure 6-13.

(5) Parabolic fillets shall be specified using the abbreviation "PA" followed by a three-segment representation of the parabola's proportion and orientation. Each segment of the parabolic fillet symbol shall be separated with a "by" symbol (an uppercase X preceded and followed by a space) (see Figure 6-13); for example

(-a) PA 3.00 X 1.00 X 0° = parabolic fillet, 3.00 on the longer leg and 1.00 on the shorter leg, with the major axis aligned parallel to the long leg

(-b) PA .750 X .200 X 10° = parabolic fillet, .750 on the longer leg and .200 on the shorter leg, with the major axis rotated 10 deg from the long leg into the included angle of the fillet

(e) Tolerances shall be specified in the form of a profile tolerance in accordance with ASME Y14.5.

(f) The preferred fillet height-to-length ratios are 1:2, 1:3, 1:4, and 1:5.

NOTE: A 1:1 ratio is a constant arc and shall not be specified as a parabolic fillet.

6.6 Elliptical Fillets

(a) Elliptical fillets are a concave easing of a corner or convex easing of an edge of a part typically used to reduce stress concentration. The cross section of an elliptical fillet is an ellipse instead of a constant arc. This provides greater strength characteristics than a fillet radius in a direction parallel or nearly parallel to the ellipse's major axis.

(b) General applications for elliptical fillets include areas where a circular arc of sufficient size to mitigate stress reduction is not feasible, and where the strength requirement in one direction is greater than in another.

(c) Due to their geometric definition, ellipses may be tangent at their major and minor axes when blending two surfaces that meet at a 90-deg angle. For these reasons, an ellipse may be easier to define than a parabola when blending surfaces that meet at a 90-deg angle. See Figure 6-14.

(d) An elliptical fillet is expressed using three terms in the following order: length of long leg as measured parallel to the surface adjacent to the long leg, length of short leg as measured perpendicular to the surface adjacent to the long leg, angle between the surface adjacent to the long leg and the ellipse's major axis.

(1) The elliptical fillet angle is between 0 deg and 90 deg. An elliptical fillet whose major axis is parallel to the surface adjacent to the long leg of the fillet has an angle of 0 deg.

(2) Similar to a radius, the included angle of the adjacent surfaces of an elliptical fillet shall be dimensioned using the product definition.

(3) The dimension of an elliptical fillet shall be expressed as a basic dimension by being enclosed in a basic dimension symbol.

(4) At least one leg of the elliptical fillet shall be dimensioned to clarify the fillet's orientation. When used to relieve stress concentrations, the long leg of the elliptical fillet should correspond to the major fatigue load. See Figure 6-14.

(5) Elliptical fillets shall be specified using the abbreviation "EP" followed by a three-segment representation of the ellipse's proportion and orientation. Each segment of the elliptical fillet symbol shall be separated with a "by" symbol (an uppercase X preceded and followed by a space) (see Figure 6-14); for example

(-a) EP 3.00 X 1.00 X 0° = elliptical fillet, 3.00 on the longer leg and 1.00 on the shorter leg, with the major axis aligned parallel to the long leg

(-b) EP .750 X .200 X 10° = elliptical fillet, .750 on the longer leg and .200 on the shorter leg, with the major axis rotated 10 deg from the long leg into the included angle of the fillet

(e) Tolerances shall be specified in the form of a profile tolerance in accordance with ASME Y14.5.

(f) The preferred fillet ratios are shown in para. 6.5(f).

NOTE: A 1:1 ratio is a constant arc and shall not be specified as an elliptical fillet.