

INTERNATIONAL
STANDARD

ISO/IEC
11559

First edition
1993-08-15

**Information technology — Data
interchange on 12,7 mm wide 18-track
magnetic tape cartridges — Extended
format**

*Technologies de l'information — Échange de données sur cartouche de
bande magnétique de 12,7 mm de large à 18 pistes — Format étendu*



Reference number
ISO/IEC 11559:1993(E)

Contents	Page
Section 1 - General	1
1 Scope	1
2 Conformance	1
2.1 Magnetic tape cartridge	1
2.2 Generating system	1
2.3 Receiving system	1
3 Normative references	2
4 Definitions	2
4.1 algorithm	2
4.2 Average Signal Amplitude	2
4.3 back surface	2
4.4 Beginning of Tape (BOT)	2
4.5 byte	2
4.6 cartridge	2
4.7 Cyclic Redundancy Check Character	2
4.8 Data Block	2
4.9 Data Records	2
4.9.1 Processed Data Record (PDR)	2
4.9.2 Host Data Record	2
4.9.3 Logical Data Record (LDR)	3
4.9.4 User Data Record (UDR)	3
4.10 Error Correcting Code	3
4.11 flux transition position	3
4.12 flux transition spacing	3
4.13 magnetic tape	3
4.14 Master Standard Reference Tape	3
4.15 Packet	3
4.16 Packet Identifier	3
4.17 Packet Trailer	3

4.18	pad byte	3
4.19	physical recording density	3
4.20	Postamble	3
4.21	Preamble	3
4.22	Processed Data	3
4.23	processing	3
4.24	Reference Field	3
4.25	Secondary Standard Reference Tape	3
4.26	Standard Reference Amplitude (SRA)	4
4.27	Standard Reference Current	4
4.28	Test Recording Current	4
4.29	track	4
4.30	Typical Field	4
4.31	transformation	4
5	Conventions and notations	4
5.1	Representation of numbers	4
5.2	Names	4
5.3	Acronyms	4
6	Environment and safety	5
6.1	Cartridge/Tape testing environment	5
6.2	Cartridge operating environment	5
6.3	Cartridge storage environment	5
6.4	Safety requirements	5
6.4.1	Safeness	5
6.4.2	Flammability	5
6.5	Transportation	5
Section 2 - Characteristics of the tape		6
7	Characteristics of the tape	6
7.1	Material	6
7.2	Tape length	6
7.3	Tape width	6
7.4	Tape discontinuity	6
7.5	Total thickness of tape	6
7.6	Base material thickness	6
7.7	Longitudinal curvature	6
7.8	Out-of-plane distortions	6
7.9	Cupping	6
7.10	Dynamic frictional characteristics	7
7.10.1	Frictional drag between the recording surface and the tape back surface	7
7.10.2	Frictional drag between the tape recording surface and ferrite after environmental cycling	7
7.11	Coating adhesion	7
7.12	Flexural rigidity	8
7.13	Electrical resistance of coated surfaces	8
7.14	Tape durability	9
7.15	Inhibitor tape	9

7.16	Tape abrasivity	9
7.17	Pre-recording condition	10
7.18	Magnetic recording characteristics	10
7.18.1	Typical Field	10
7.18.2	Signal amplitude	10
7.18.3	Resolution	10
7.18.4	Overwrite	10
7.18.5	Narrow-band signal-to-noise ratio (NB-SNR)	11
7.19	Tape quality	11
7.19.1	Missing pulses	12
7.19.2	Missing pulse zones	12
7.19.3	Coincident missing pulse zones	12
Section 3 - Cartridge		12
8	Dimensional and mechanical characteristics of the cartridge	12
8.1	Overall dimensions	13
8.2	Write-inhibit mechanism	13
8.3	Label area of the rear side	14
8.4	Label area of the top side	14
8.5	Case opening	14
8.6	Locating notches	15
8.7	Locating areas	15
8.8	Inside configuration of the case around the case opening	15
8.9	Other external dimensions of the case	15
8.10	Central window	16
8.11	Stacking ribs	16
8.12	Flexibility of the case	16
8.12.1	Requirements	16
8.12.2	Procedure	16
8.13	Tape reel	17
8.13.1	Locking mechanism	17
8.13.2	Axis of rotation of the reel	17
8.13.3	Metallic insert	17
8.13.4	Toothed rim	17
8.13.5	Hub of the reel	17
8.13.6	Relative positions	18
8.13.7	Characteristics of the toothed rim	19
8.14	Leader block	19
8.15	Attachment of the tape to the header block	20
8.16	Latching mechanism	20
8.17	Tape wind	20
8.18	Wind tension	20
8.19	Circumference of the tape reel	21
8.20	Moment of inertia	21
Section 4 - Recording method and formats		28
9	Method of recording	28

9.1	Physical recording density	28
9.2	Bit cell length	28
9.3	Average bit cell length	28
9.4	Long-term average bit cell length	28
9.5	Short-term average bit cell length (STA)	28
9.6	Rate of change	28
9.7	Bit shift	28
9.8	Total character skew	29
9.9	Read signal amplitude	29
9.10	Coincident missing pulse zones	29
10	Track format	29
10.1	Number of tracks	29
10.2	Reference edge	29
10.3	Track positions	29
10.4	Track width	29
10.5	Azimuth	30
11	Packet format	30
11.1	Packet elements	30
11.2	Packet ID	30
11.3	UDR	31
11.4	Packet Trailer	31
11.4.1	Packet Trailer when data has been processed	31
11.4.2	Packet Trailer when data has not been processed	31
12	Data Block format	32
12.1	Data Part	32
12.1.1	Packet Bytes	32
12.1.2	Count Field Bytes	32
12.1.3	Block-ID Bytes	32
12.2	Allocation of Data Bytes to frames	33
12.2.1	Prefix Frames	34
12.2.2	Data Frames	34
12.2.3	Residual Frame 1	35
12.2.4	Residual Frame 2	35
12.2.5	Suffix Frames	37
12.3	Error Correcting Code (ECC)	37
12.3.1	Diagonal Redundancy Check (DRC)	38
12.3.2	Vertical Redundancy Check (VRC)	38
12.3.3	ECC Format	38
12.3.4	Summary of ECC2)	39
12.4	Recording of 8-bit bytes on the tape	40
12.5	Recorded Data Block	40
12.5.1	Preamble	40
12.5.2	Beginning of Data Mark (BDM)	41

12.5.3	Resync Control Frame	41
12.5.4	End of Data Mark (EDM)	41
12.5.5	Postamble	41
12.6	Data Density	41
13	Tape format	41
13.1	Density Identification Burst	42
13.2	ID Separator Burst	42
13.3	Interblock Gaps	42
13.4	Erase Gaps	43
13.4.1	Normal Erase Gaps	43
13.4.2	Elongated Erase Gaps	43
13.5	Tape Marks	43
13.6	Relationship between Interblock Gaps, Erase Gaps and Tape Marks	44
13.6.1	Interblock Gap followed by a Tape Mark	44
13.6.2	Tape Mark followed by an Interblock Gap	44
13.6.3	Interblock Gap followed by an Erase Gap	44
13.6.4	Erase Gap followed by an Interblock Gap	44
13.6.5	Summary of the relationship between Interblock Gaps, Erase Gaps and Tape Marks	45
13.7	First and last recording on the tape	45
13.8	Summary of the tape format	46
13.9	Transform Change Records (TCRs)	47
Annexes		
A	Recommendations for transportation	49
B	Inhibitor tape	50
C	Tape abrasivity measurement procedure	51
D	Recommendations on tape durability	53
E	Pre-recording condition	54
F	Representation of 8-bit bytes by 9-bit patterns	55
G	Measurement of bit shift	58
H	Summary of data flow	60
J	Implementation of a CRC	61
K	Calculation of a Physical Position Indicator	62

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 11559 was prepared by European Computer Manufacturers Associations (as ECMA-152) and was adopted, under a special "fast-track procedure", by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

Annexes C, E, F, G and K form an integral part of this International Standard. Annexes A, B, D, H and J are for information only.

IECNORM.COM : Click to view full PDF of ISO/IEC 11559:1993

Introduction

ISO/IEC 11559 incorporates all the specifications of ISO 9661, together with extensions and modifications which specify the additional features of an extended format that also allows higher capacities to be achieved. The specifications of the tape, cartridge, recorded signal, recording method and most of the recorded format are identical with those in ISO 9661.

It is not intended that this International Standard replaces ISO 9661. Existing drives and cartridges which conform to ISO 9661 will continue to do so and will not conform to all requirements of this International Standard. Drives conforming to this International Standard will be able to write on, and read from, cartridges conforming to ISO 9661.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11559:1993

Information technology — Data interchange on 12,7 mm wide 18-track magnetic tape cartridges — Extended format

Section 1 - General

1 Scope

This International Standard specifies the physical and magnetic characteristics of a 12,7 mm wide, 18-track magnetic tape cartridge, to enable interchangeability of such cartridges. It also specifies the quality of the recorded signals, the format and the recording method, thus allowing, together with ISO 1001, full data interchange by means of such magnetic tape cartridges.

The cartridge and recording method are identical with those described in ISO 9661. This International Standard specifies extensions to the transformation of data before it is formatted as in ISO 9661.

These extensions

- specify a method for increasing the utilization of the tape by combining smaller blocks of data into extended blocks;
- specify a method for identifying whether the recorded data has been processed and, if it has been processed, the algorithm used for processing;
- specify a method for including recorded data blocks conforming to this International Standard and recorded data blocks conforming to ISO 9661 on the same tape.

The permissible routes for the flow of data are shown in annex H.

2 Conformance

2.1 Magnetic tape cartridge

A magnetic tape cartridge shall be in conformance with this International Standard if

- the cartridge meets all the requirements of clauses 4 and 6 to 8;
- the recording on the tape meets the requirements of clauses 9 to 13;
- for each recorded packet the algorithm used for processing the data therein, if processed data has been recorded, has (have) been registered and the registered identification is included in Byte 13 of the Packet ID Block of this packet (see 11.2).
- Note 1 - If the algorithm has not been registered Byte 13 shall be set to (FF).

2.2 Generating system

A system generating a magnetic tape cartridge for interchange shall be entitled to claim conformance with this International Standard if all the recordings that it makes on a tape meet the mandatory requirements of this International Standard. A claim of conformance shall state whether or not one, or more, registered algorithms are implemented and, if so, the registered number(s) of all implemented algorithm(s).

2.3 Receiving system

A system receiving a magnetic tape cartridge for interchange shall be entitled to claim conformance with this International Standard if it is able to handle any recording made on the tape according to this International Standard. In particular it shall

- be able to recognize the occurrence of extended blocks and to identify and retrieve data from individual packets within the extended blocks;
- be able to recognize that the data has been processed, to identify the algorithm(s) used, and to indicate to the host if it cannot restore the data to its original form;

- be capable of restoring to its original form data which has been processed according to zero or more registered algorithms.

A claim of conformance shall state whether or not one, or more, registered algorithm(s) is (are) implemented and, if so, the registered number(s) of all implemented algorithms.

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

- ISO 683-13:1986, *Heat-treatable steels, alloy steels and free-cutting steels - Part 13: Wrought stainless steels.*
- ISO 1001:1986, *Information processing - File structure and labelling of magnetic tapes for information interchange.*
- ISO 1302:1992, *Technical drawings - Method of indicating surface texture on drawings.*
- ISO 9661:1986, *Information processing - Data interchange on 12,7 mm (0.5 in) wide magnetic tape cartridges - 18-tracks, 1 491 data bytes per millimetre (37 871 data bytes per inch).*
- ISO/IEC 11576:1993, *Information technology - Procedure for the registration of algorithms for the lossless compression of data.*

4 Definitions

For the purposes of this International Standard, the following definitions apply.

- 4.1 algorithm:** A set of rules for transforming the logical representation of data.
- 4.2 Average Signal Amplitude:** The average peak-to-peak value of the signal output of the read head measured over a minimum length of track of 25,4 mm exclusive of missing pulses.
- 4.3 back surface:** The surface of the tape opposite the magnetic coating used to record data.
- 4.4 Beginning of Tape (BOT):** The point along the length of the magnetic tape indicated by the start of the Density Identification Burst.
- 4.5 byte:** An ordered set of eight bits acted upon as a unit.
- 4.6 cartridge:** A container holding a supply reel of magnetic tape with an attached leader block.
- 4.7 Cyclic Redundancy Check Character:** A character represented by two bytes, placed at the end of a byte string and used for error detection.
- 4.8 Data Block:** The data entity resulting from concatenating one or more Packets, and appending control information.
- 4.9 Data Records**
- 4.9.1 Processed Data Record (PDR):** The data entity resulting from the application of an algorithm to a Logical Data Record.
- 4.9.2 Host Data Record:** The data entity originally compiled by the host.

4.9.3 Logical Data Record (LDR): The data entity received by the system from the host. It may consist of one or several Host Data Record(s) depending upon action taken by the host to use extended blocks.

4.9.4 User Data Record (UDR): The data entity available to the Packet former.

When the data has been processed it shall be a PDR.

When the data has not been processed it shall be an LDR.

4.10 Error Correcting Code: A mathematical procedure yielding bits used for the detection and correction of errors.

4.11 flux transition position: That point which exhibits maximum free-space flux density normal to the surface of the tape.

4.12 flux transition spacing: The distance along a track between successive flux transitions.

4.13 magnetic tape: A tape which will accept and retain the magnetic signals intended for input, output and storage purposes on computers and associated equipment.

4.14 Master Standard Reference Tape: A tape selected as the standard for Reference Field, Signal Amplitude, Resolution and Overwrite.

Note 2 - A Master Standard Reference Tape has been established at the National Institute for Standards and Technology (NIST).

4.15 Packet: A UDR with a Packet Identifier and Packet Trailer added.

4.16 Packet Identifier: The group of 32 bytes added to the beginning of a UDR when forming a Packet.

4.17 Packet Trailer: The group of bytes of variable size appended to a UDR when forming a Packet.

4.18 pad byte: A byte having a bit pattern consisting of eight ZEROs.

4.19 physical recording density: The number of recorded flux transitions per unit length of track, expressed in flux transitions per millimetre (ftpmm).

4.20 Postamble: A repeated 9-bit pattern at the end of a Recorded Data Block providing electronic synchronization when reading in the reverse direction.

4.21 Preamble: A repeated 9-bit pattern at the beginning of a Recorded Data Block providing electronic synchronization when reading in the forward direction.

4.22 Processed Data: Data which has been processed by an algorithm.

4.23 processing: The use of an algorithm.

4.24 Reference Field: The Typical Field of the Master Standard Reference Tape.

4.25 Secondary Standard Reference Tape: A tape the performance of which is known and stated in relation to that of the Master Standard Reference Tape.

Note 3 - Secondary Standard Reference Tapes have been developed at the National Institute for Standards and Technology (NIST) and will be available from the NIST Office of Standard Reference Materials, Room 205, Building 202, National Institute of Standards and Technology, Gaithersburg, MA 20899, USA, under reference number SRM 3202, until January 2004.

It is intended that these be used for calibrating tertiary reference tapes for use in routine calibration.

4.26 Standard Reference Amplitude (SRA): The Average Signal Amplitude from the Master Standard Reference Tape when it is recorded with the Test Recording Current on the NIST measurement system at 972 ftpmm.

Traceability to the Standard Reference Amplitude is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

4.27 Standard Reference Current: The current that produces the Reference Field.

4.28 Test Recording Current: The current that is 1,5 times the Standard Reference Current.

4.29 track: A longitudinal area on the tape along which a series of magnetic signals may be recorded.

4.30 Typical Field: In the plot of the Average Signal Amplitude against the Recording Field at the physical recording density of 972 ftpmm, the minimum field that causes an Average Signal Amplitude equal to 85% of the maximum Average Signal Amplitude.

4.31 transformation: The manipulation of Host Data Records before formatting. It includes the operations of Processing, the formation of Packets and the concatenation of Packets.

5 Conventions and notations

5.1 Representation of numbers

The following conventions and notations apply in this International Standard, unless otherwise stated:

- In each field the bytes shall be arranged with Byte 1, the most significant, first. Within each byte the bits shall be arranged with Bit 1, the most significant, first and Bit 8, the least significant bit, last. This order applies to the data, and to the input and output of the error correcting codes and the cyclic redundancy codes.
- Letters and digits in parentheses represent numbers in hexadecimal notation.
- Numbers in binary notation and bit combinations are represented by strings of ZEROs and ONES.
- Numbers in binary notation and bit combinations are shown with the most significant bit to the left.
- The setting of bits is denoted by ZERO or ONE.

5.2 Names

The names of entities are given with a capital initial letter.

5.3 Acronyms

BDM	Beginning of Data Mark
BOT	Beginning of Tape
CRC	Cyclic Redundancy Check
DRC	Diagonal Redundancy Check
ECC	Error Correcting Code
EDM	End of Data Mark
ID	Identifier
LDR	Logical Data Record
NB-SNR	Narrow band signal-to-noise ratio
PDR	Processed Data Record
RBW	Resolution BandWidth
SRA	Standard Reference Amplitude
STA	Short Term Average
TCR	Transform Change Record

UDR	User Data Record
VBW	Video BandWidth
VRC	Vertical Redundancy Code

6 Environment and safety

Unless otherwise stated, the conditions specified below refer to the ambient conditions in the test or computer room and not to those within the tape equipment.

6.1 Cartridge/Tape testing environment

Unless otherwise stated, tests and measurements made on the tape cartridge to check the requirements of this International Standard shall be carried out under the following conditions:

temperature:	23 °C ± 2 °C
relative humidity:	40 % to 60 %
conditioning period before testing:	24 h

6.2 Cartridge operating environment

Cartridges used for data interchange shall be capable of operating under the following conditions:

temperature:	16 °C to 32 °C
relative humidity:	20 % to 80 %
wet bulb temperature:	25 °C max.

The average temperature of the air immediately surrounding the tape shall not exceed 40,5 °C.

Note 4 - Localized tape temperatures in excess of 49 °C may cause tape damage.

Conditioning before operating: If a cartridge has been exposed during storage and/or transportation to conditions outside the above values, it shall be conditioned for a period of at least 24 h.

6.3 Cartridge storage environment

Cartridges used for data interchange shall be stored under the following conditions.

temperature:	5 °C to 32 °C
relative humidity:	5 % to 80 %
wet bulb temperature:	26 °C max.

6.4 Safety requirements

6.4.1 Safeness

The cartridge and its components shall not constitute any safety or health hazard when used in its intended manner or in any foreseeable misuse in an information processing system.

6.4.2 Flammability

The cartridge and its components shall be made from materials which, if ignited from a match flame, do not continue to burn in a still carbon dioxide atmosphere.

6.5 Transportation

This International Standard does not specify parameters for the environment in which cartridges should be transported. Annex A gives some recommendations for transportation.

Section 2 - Characteristics of the tape

7 Characteristics of the tape

7.1 Material

The tape shall consist of a base material (oriented polyethylene terephthalate film or its equivalent) coated on one side with a strong yet flexible layer of ferromagnetic material dispersed in a suitable binder. The back surface of the tape may also be coated with a ferromagnetic or non-ferromagnetic material.

7.2 Tape length

The length of the tape shall not be less than 165 m.

7.3 Tape width

The width of the tape shall be $12,650 \text{ mm} \pm 0,025 \text{ mm}$. The width shall be measured across the tape from edge-to-edge when the tape is under a tension of less than 0,28 N.

7.4 Tape discontinuity

There shall be no discontinuities in the tape such as those produced by tape splicing or perforations.

7.5 Total thickness of tape

The total thickness of the tape at any point shall be between 0,025 9 mm and 0,033 7 mm.

7.6 Base material thickness

The thickness of the base material shall be 0,023 4 mm nominal.

7.7 Longitudinal curvature

The radius of curvature of the edge of the tape shall not be less than 33 m.

Procedure

Allow a 1 m length of tape to unroll and assume its natural curvature on a flat smooth surface. Measure the deviation from a 1 m chord. The deviation shall not be greater than 3,8 mm. This deviation corresponds to the minimum radius of curvature of 33 m if measured over an arc of circle.

7.8 Out-of-plane distortions

All visual evidence of out-of-plane distortion shall be removed when the tape is subjected to a uniform tension of 0,6 N. Out-of-plane distortions are local deformations which cause portions of the tape to deviate from the plane of the surface of the tape. Out-of-plane distortions are most readily observed when the tape is lying on a flat surface under no tension.

7.9 Cupping

The departure across the width of tape from a flat surface shall not exceed 0,3 mm.

Procedure:

Cut a $1,0 \text{ m} \pm 0,1 \text{ m}$ length of tape. Condition it for a minimum of 3 h in the test environment by hanging it so that the coated surface is freely exposed to the test environment. From the centre portion of the conditioned tape cut a test piece of length 25 mm. Stand the test piece on its end in a cylinder which is at least 25 mm high with an inside diameter of $13,0 \text{ mm} \pm 0,2 \text{ mm}$. With the cylinder standing on an optical comparator measure the cupping by aligning the edges of the test piece to the reticle and determining the distance from the aligned edges to the corresponding surface of the test piece at its centre.

7.10 Dynamic frictional characteristics

In the tests of 7.10.1 and 7.10.2 the specified forces of 1,0 N and 1,50 N, respectively, comprise both the force component of the dynamic friction and the force of 0,64 N applied to the sample of tape.

Note 5 - Particular attention should be given to keeping the surfaces clean.

7.10.1 Frictional drag between the recording surface and the tape back surface

The force required to move the recording surface in relation to the back surface shall not be less than 1,0 N.

Procedure:

- a) Wrap a test piece of tape around a 25,4 mm diameter circular mandrel with the back surface of the test piece facing outwards.
- b) Place a second test piece of tape, with the recording surface facing inwards, around the first test piece for a total wrap angle of 90°.
- c) Apply a force of 0,64 N to one end of the outer test piece of tape. Secure its other end to a force gauge which is mounted on a motorized linear slide.
- d) Drive the slide at a speed of 1 mm/s.

7.10.2 Frictional drag between the tape recording surface and ferrite after environmental cycling

The force required to move the tape at a point 1,34 m from the leader block of the cartridge shall not be greater than 1,50 N. The force required at a point 4,3 m from the junction of the tape with the cartridge hub shall not exceed the first force by more than a factor of 4.

Procedure:

- a) Wind tape on to a spool hub of diameter 50 mm to an outside diameter of 97 mm with a winding tension of $2,2 \text{ N} \pm 0,2 \text{ N}$.
- b) Repeat the following two steps five times:
 - 1) Store for 48 h at a temperature of 50 °C and a relative humidity of 10% to 20%.
 - 2) Condition in the testing environment for 2 h and rewind with a tension of $2,2 \text{ N} \pm 0,2 \text{ N}$.
- c) Condition the tape for 48 h at a temperature of 30,5 °C and a relative humidity of 85%. The tape shall remain in this environment for steps d) and e).
- d) Apply a force of 0,64 N to one end of a test piece of not more than 1 m, taken 1,34 m from the leader block. Pass the test piece over a ferrite rod of diameter 25,4 mm with the recording surface in contact with the rod for a total wrap angle of 90°.

The rod shall be made from the ferrite specified in annex C. It shall be polished to a roughness value R_a of 0,05 μm (roughness grade N2, ISO 1302). Pull the other end of the test piece horizontally at 1 mm/s.
- e) Repeat step d) for a similar test piece taken 4,3 m from the junction of the tape with the cartridge hub.

7.11 Coating adhesion

See figure 1.

The force required to peel any part of the coating from the tape base material shall not be less than 1,5 N.

Procedure:

- a) Take a test piece of the tape approximately 380 mm long and scribe a line through the recording coating across the width of the tape 125 mm from one end.

- b) Using a double-sided pressure sensitive tape, attach the full width of the test piece to a smooth metal plate, with the recording surface facing the plate, as shown in the figure below.
- c) Fold the test piece over 180°, attach the metal plate and the free end of the test piece to the jaws of a universal testing machine and set the speed of the jaw separation to 254 mm per min.
- d) Note the force at which any part of the coating first separates from the base material. If this is less than 1,5 N, the test has failed. If the test piece peels away from the double-sided pressure sensitive tape before the force exceeds 1,5 N, an alternative type of double-sided pressure sensitive tape shall be used.
- e) If the back surface of the tape is coated, repeat a) to d) for the back coating.

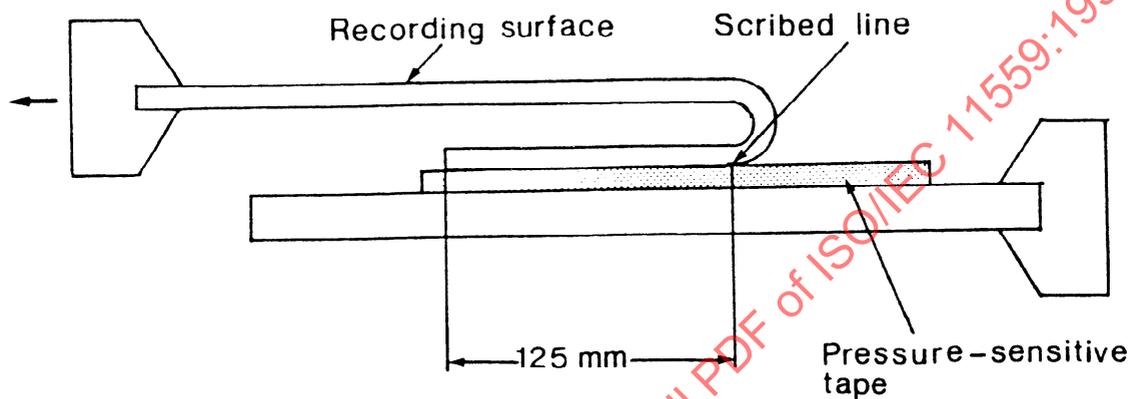


Figure 1 - Coating adhesion

7.12 Flexural rigidity

The flexural rigidity of the tape in the longitudinal direction shall be between 0,06 N·mm² and 0,16 N·mm².

Procedure:

Clamp a 180 mm test piece of tape in a universal testing machine, allowing a 100 mm separation between the machine jaws. Set the jaw separation speed at 5 mm per minute. Plot force against distance. Calculate the flexural rigidity using the slope of the curve between 2,2 N and 6,7 N by the formula

$$E = \frac{\delta F / WT}{\delta L / L}$$

$$I = WT^3 / 12$$

$$\text{Flexural rigidity} = EI$$

where

δF is the change in force in newtons;

T is the measured thickness in millimetres;

W is the measured width in millimetres;

$\delta L/L$ is the change in sample length between the jaws divided by the original length between the jaws.

7.13 Electrical resistance of coated surfaces

The electrical resistance of any square area of the recording surface shall be within the range


- $10^5 \Omega$ to $5 \times 10^8 \Omega$ for non-backcoated tapes;
- $10^5 \Omega$ to $5 \times 10^9 \Omega$ for backcoated tapes.

The electrical resistance of any backcoating shall be less than $10^6 \Omega$.

Procedure:

Condition a test piece of tape to the test environment for 24 h. Position the test piece over two 24-carat gold-plated, semi-circular electrodes having a radius $r = 25,4$ mm and a finish of at least N4, so that the recording surface is in contact with each electrode. These electrodes shall be placed parallel to the ground and parallel to each other at a distance $d = 12,7$ mm between their centres. Apply a force F of 1,62 N to each end of the sample. Apply a d.c. voltage of $500 \text{ V} \pm 10 \text{ V}$ across the electrodes and measure the resulting current flow. From this value, determine the electrical resistance.

Repeat for a total of five positions along the test piece and average the five resistance readings. For back-coated tape repeat the procedure with the backcoating in contact with the electrodes.

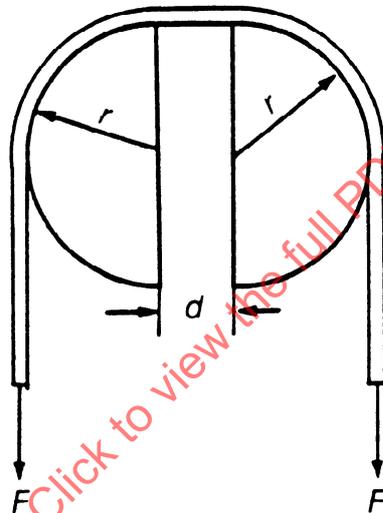

When mounting the sample, make sure that no conducting paths exist between the electrodes except that through the coating under test.

Note 6 - Particular attention should be given to keeping the surfaces clean.

7.14 Tape durability

This International Standard does not specify parameters for assessing tape durability.

However, a recommended procedure is described in annex D.

7.15 Inhibitor tape

This International Standard does not specify parameters for assessing whether or not a tape is an inhibitor tape.

However, annex B gives further information on inhibitor tapes.

7.16 Tape abrasivity

Tape abrasivity is the tendency of the tape to wear the tape transport. The length of the wear pattern on a wear bar shall not exceed $56 \mu\text{m}$ when measured as specified in annex C.

7.17 Pre-recording condition

Prior to recording data, or to testing, the tape shall have been erased utilizing alternating magnetic fields of decaying levels (anhysteretic process) to ensure that the remanent magnetic moment of the recording surface does not exceed 20% of the maximum remanent magnetic moment. Annex E specifies the method of measurement.

In addition no low density transitions shall be present on the tape.

7.18 Magnetic recording characteristics

The magnetic recording characteristics shall be as defined by the test requirements given below.

When performing these tests, the output or resultant signal shall be measured on the same relative pass for both a tape calibrated to the Master Standard Reference Tape and the tape under test (read-while-write or first forward-read-pass) on the same equipment.

The following conditions shall apply to the testing of all magnetic recording characteristics, unless otherwise noted.

- tape condition : pre-recording condition
- tape speed : not greater than 2,5 m/s
- read-track : within the written track
- azimuth alignment : not greater than 6' between the mean write transitions and the read gap
- write-gap length : 1,4 $\mu\text{m} \pm 0,2 \mu\text{m}$
- write head saturation density : 0,34 T $\pm 0,03$ T
- tape tension : 2,2 N $\pm 0,2$ N
- recording current : Test Recording Current

7.18.1 Typical Field

The Typical Field of the tape shall be between 90% and 110% of the Reference Field.

Traceability to the Reference Field is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.2 Signal amplitude

The Average Signal Amplitude at the physical recording density of 972 ftpmm shall be between 70% and 140% of the SRA.

Traceability to the SRA is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.3 Resolution

The ratio of the Average Signal Amplitude at the physical recording density of 1 458 ftpmm to that at the physical recording density of 972 ftpmm shall be between 80% and 120% of the same ratio for the Master Standard Reference Tape.

Traceability to the resolution of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.4 Overwrite

Overwrite is the ratio of the Average Signal Amplitude of the residual of the fundamental frequency of a tone pattern after being overwritten at 972 ftpmm to the Average Signal Amplitude of the 972 ftpmm signal. The Average Signal Amplitude of the tone pattern is the peak-to-peak amplitude of the sinusoidal signal with equal rms power.


7.18.4.1 Requirement

The overwrite for the tape shall be less than 120% of the overwrite for the Master Standard Reference Tape.

Traceability to the overwrite of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.4.2 Procedure

Record a tone pattern which shall be the following sequence of flux transitions:



where

$$a_1 = 1,029 \mu\text{m}$$

$$a_2 = 0,514 \mu\text{m}$$

Record a 972 ftpmm signal over the tone pattern. Measure the Average Signal Amplitude of the residual of the fundamental frequency of the tone pattern (one sixth of the frequency of the 972 ftpmm signal) and the Average Signal Amplitude of the 972 ftpmm signal. Both amplitude measurements should be made using suitable filters.

7.18.5 Narrow-band signal-to-noise ratio (NB-SNR)

The Narrow-band signal-to-noise ratio is the Average Signal Amplitude rms power divided by the average integrated (side band) rms noise power, and is expressed in decibels.

7.18.5.1 Requirement

The NB-SNR shall be equal to, or greater than, 30 dB when normalized to a track width of 410 μm . The normalization factor is $\text{dB}(410) = \text{dB}(W) + 10 \log 410/W$, where W is the track width used when measuring $\text{dB}(W)$.

7.18.5.2 Procedure

The NB-SNR shall be measured using a spectrum analyzer with a resolution bandwidth (RBW) of 1 kHz and a video bandwidth (VBW) of 10 Hz. The tape speed shall be 762 mm/s for the frequencies specified below.

The NB-SNR shall be measured as follows:

- Measure the read-signal amplitude of the 972 ftpmm signal, taking a minimum of 150 samples over a minimum length of tape of 46 m.
- On the next pass (read only) measure the rms noise power over the same section of tape and integrate the rms noise power (normalizing for the actual resolution bandwidth) over the range from 332 kHz to 366 kHz.

For other tape speeds all the frequencies shall be linearly scaled.

7.19 Tape quality

The tape quality (including the effects of exposure to storage and transportation environments) is defined by the testing requirements given in the following clauses. The following conditions shall apply to all quality testing requirements.

- environment : operating environment
- tape condition : pre-recording condition
- tape speed : 2 m/s
- read-track width : 410 μm
- physical recording density : 972 ftpmm
- write-gap length : 1,4 $\mu\text{m} \pm 0,2 \mu\text{m}$

- azimuth alignment : not greater than 6' between the mean write transitions and the read gap
- write head saturation density : $0,34 T \pm 0,03 T$
- recording current : Test Recording Current
- format : 18 tracks
- tape tension : $2,2 N \pm 0,2 N$

7.19.1 Missing pulses

A missing pulse is a loss of read signal amplitude. A missing pulse exists when the base-to-peak read signal amplitude is 25%, or less, of half the Average Signal Amplitude for the preceding 25,4 mm of tape.

7.19.2 Missing pulse zones

A missing pulse zone begins with a missing pulse and ends when 64 consecutive flux transitions are detected or a length of 1 mm of tape has been measured.

The missing pulse zone rate shall be less than one in 8×10^6 flux transitions recorded.

7.19.3 Coincident missing pulse zones

There are two 9-track groups in the 18-track format. One group comprises the odd-numbered tracks, the other group comprises the even-numbered tracks. A simultaneous missing pulse zone condition on two or more tracks of a 9-track group is a coincident missing pulse zone.

If a coincident missing pulse zone occurs at the same time in both groups of tracks, it shall be considered as a single coincident missing pulse zone. Its length shall begin with the start of the earliest coincident missing pulse zone and terminate with the end of the latest coincident missing pulse zone.

No 165 m length of tape shall have more than 12 coincident missing pulse zones.

No coincident missing pulse zone shall exceed 50 mm.

Section 3 - Cartridge

8 Dimensional and mechanical characteristics of the cartridge

The cartridge shall consist of the following elements:

- a case,
- a reel for the magnetic tape,
- a magnetic tape wound on the hub of the reel,
- a locking mechanism for the reel,
- a write-inhibit mechanism,
- a leader block,
- a latching mechanism for the leader block.

Dimensional characteristics are specified for those parameters deemed mandatory for interchange and compatible use of the cartridge. Where there is freedom of design, only the functional characteristics of the elements described are indicated. Figures 2 to 16 depict a typical implementation.

Where they are purely descriptive the dimensions are referred to three Reference Surfaces A, B and C forming a geometrical trihedral (see figure 2). Where the dimensions are related to the position of the cartridge in the drive, they may be referred to another surface of the cartridge. Figures 3 to 10 show the dimensions of the empty case.

- Figure 2 is a general view of the whole cartridge.
- Figure 3 shows the front side of the case which lies on Reference Surface A.
- Figure 4 shows the top side of the case.
- Figure 5 shows the rear side of the case.

Figure 6	shows the bottom side of the case which lies in Reference Surface C.
Figure 7	shows the side of the case which lies in Reference Surface B.
Figure 8	shows an enlarged view of a part of figure 3.
Figure 9	shows an enlarged cross-section of a location notch.
Figure 10	shows an enlarged cross-section of a detail of the opening of the case.
Figure 11	shows an enlarged partial cross-section of the cartridge in hand.
Figure 12	shows the same cross-section as figure 11 but of the cartridge in the drive.
Figure 13	shows schematically the teeth of the toothed rim.
Figure 14	shows two views and an enlarged cross-section of the leader block.
Figure 15	shows the fixation of the tape to the leader block.
Figure 16	shows the leader block inserted in the case.

8.1 Overall dimensions (figures 3 to 5)

The overall dimensions of the case shall be

$$l_1 = 125,00 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_2 = 109,00 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_3 = 24,50 \text{ mm} \begin{array}{l} + 0,50 \text{ mm} \\ - 0,32 \text{ mm} \end{array}$$

The corners of the case shall be rounded off as specified by

$$r_1 = 3,00 \text{ max.}$$

$$r_2 = 4,00 \text{ max.}$$

$$r_3 = 3,00 \text{ min.}$$

8.2 Write-inhibit mechanism (figures 3 and 4)

The write-inhibit mechanism shall have a flat surface identified by a visual mark, e.g. a white spot, when in the position in which writing is inhibited.

The flat surface shall be accessible through a window in the front side of the case. The location and dimensions of the window are specified by

$$l_4 = 11,80 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_5 = 15,60 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_6 = 7,40 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_7 = 12,00 \text{ mm} \pm 0,25 \text{ mm}$$

In the write-inhibit position the flat surface of the write-inhibit mechanism shall be behind this window at a distance

$$l_8 = 2,55 \text{ mm min.}$$

from the front side of the case.

In the write-enable position this surface shall be within 0,25 mm of the front side of the case.

The force required for the operation of the write-inhibit mechanism shall be in the range

$$2 \text{ N to } 9 \text{ N}$$

when applied tangentially to the surface of the case.

This International Standard does not prescribe the actual implementation of the write-inhibit mechanism. For example, it can be a rotatable or a slidable element. The implementation may require a larger or additional window but shall not impair the integrity of the case against potential contaminants.

8.3 Label area of the rear side (figures 4 to 5)

On the rear side of the case there shall be a label area specified by

$$l_9 = 7,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{10} = 80,00 \text{ mm} \begin{array}{l} + 0,30 \text{ mm} \\ - 0,16 \text{ mm} \end{array}$$

$$l_{11} = 12,30 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{12} = 0,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_4 = 1,00 \text{ mm max.}$$

8.4 Label area of the top side (figure 4)

On the top side of the case there shall be a label area, recessed by $0,50 \text{ mm} \pm 0,25 \text{ mm}$, specified by l_9 , l_{10} , l_{12} and in addition by

$$l_{13} = 31,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{14} = 75,00 \text{ mm} \begin{array}{l} + 0,30 \text{ mm} \\ - 0,16 \text{ mm} \end{array}$$

8.5 Case opening (figures 3, 4, 6 and 8)

The case shall have an opening for the tape in which the leader block can be inserted (see also figure 16). This opening shall be specified by

$$l_{15} = 4,70 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{16} = 14,90 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_{17} = 7,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{18} = 87,10 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{19} = 4,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_5 = 4,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$\alpha = 50^\circ \pm 1^\circ$$

Moreover, figure 8 shows at a larger scale the details of the configuration of the case opening as seen at the right-hand side of figure 3.

$$l_{61} = 3,9 \text{ mm} \pm 0,5 \text{ mm}$$

$$l_{62} = 16,9 \text{ mm} \begin{array}{l} + 0,5 \text{ mm} \\ - 0,4 \text{ mm} \end{array}$$

$$l_{63} = 3,0 \text{ mm} \pm 0,5 \text{ mm}$$

$$l_{64} = 11,6 \text{ mm} \pm 0,5 \text{ mm}$$

$$\omega_1 = 1^\circ \pm 30'$$

$$\omega_2 = 20^\circ \pm 2^\circ$$

8.6 Locating notches (figures 6, 7 and 9)

There shall be two locating notches open towards the bottom side. These location notches shall be specified by

$$l_{20} = 106,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{21} = 5,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{22} = 7,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{23} = 104,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{24} = 2,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$\beta = 1^{\circ}30' \pm 30'$$

$$\gamma = 2^{\circ} \pm 30'$$

8.7 Locating areas (figure 6)

The bottom side of the case shall have three circular locating areas a_1 , a_2 and a_3 which shall lie in the same horizontal plane within 0,25 mm.

Areas a_1 and a_2 shall have a diameter of 10,00 mm \pm 0,25 mm. The positions of their centres shall be specified by

$$l_{25} = 108,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{26} = 3,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{27} = 105,50 \text{ mm} \pm 0,25 \text{ mm}$$

Area a_3 shall have a diameter of 14,00 mm \pm 0,25 mm. The position of its centre shall be specified by

$$l_{28} = 31,25 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{29} = 54,50 \text{ mm} \pm 0,25 \text{ mm}$$

8.8 Inside configuration of the case around the case opening (figures 6 and 10)

Figures 6 and 10 show the inside configuration of the case around the opening of the case. This configuration shall be defined as follows (see also 8.10)

$$l_{30} = 3,30 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{31} = 18,40 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_6 = 1,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_7 = 1,50 \text{ mm} \pm 0,25 \text{ mm}$$

The oblique edge of the case shall be tangential to the arc of circle defined by r_6 at an angle

$$\lambda = 40^{\circ} \pm 30'$$

8.9 Other external dimensions of the case (figure 7)

The external form of the case shall be further specified by

$$l_{32} = 113,2 \text{ mm} \pm 0,3 \text{ mm}$$

$$l_{33} = 26,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_8 = 145,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_9 = 145,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$\delta = 30^{\circ} \pm 30'$$

8.10 Central window (figure 6)

The bottom side of the case shall have a central window. The location of its centre shall be specified by l_{29} and

$$l_{34} = 61,00 \text{ mm} \pm 0,25 \text{ mm}$$

Its diameter shall be

$$d_1 = 43,5 \text{ mm} \begin{array}{l} + 2,0 \text{ mm} \\ - 1,0 \text{ mm} \end{array}$$

The angle with its apex at the centre of this window and formed by the two lines tangential to the parts shown in figure 6 in cross-section shall be

$$\theta = 16^\circ \pm 30'$$

8.11 Stacking ribs

The bottom side of the case shall have two parallel stacking ribs. Their dimensions shall be

$$l_{35} = 5,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{36} = 1,00 \text{ mm} \pm 0,16 \text{ mm}$$

$$l_{37} = 74,50 \text{ mm} \pm 0,25 \text{ mm}$$

Their locations shall be

$$l_{38} = 31,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{39} = 7,50 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_{40} = 79,50 \text{ mm} \pm 0,25 \text{ mm}$$

8.12 Flexibility of the case

The flexibility of the top and bottom sides of the case (see figure 2) is the amount of deflection observed when they are submitted to a perpendicular force F .

8.12.1 Requirements

The amount of deflection d shall meet the following requirements:

Deflection of the top side:

$$0,0256 F \leq d \leq 0,38 + 0,054 F$$

Deflection of the bottom side:

$$0,0228 F \leq d \leq 0,38 + 0,040 F$$

where

d is the measured deflection in millimetres.

$$4,5 \text{ N} \leq F \leq 54,0 \text{ N}$$

8.12.2 Procedure

The flexibility of the case shall be measured in a universal testing machine operating in the compression mode. Use a suitable load cell for the test. Apply a single point load with a radius of $10 \text{ mm} \pm 1 \text{ mm}$ on the bottom and subsequently on the top of the cartridge at the points shown in figure 4 and figure 6, and specified by

$$l_{65} = 86,9 \text{ mm nominal}$$

$$l_{66} = 54,5 \text{ mm nominal}$$

8.13 Tape reel (figures 11 and 12)

Figures 10 and 11 show the tape reel mounted within the case. Figure 11 specifies the different dimensions of the reel when the cartridge is in hand, figure 12 when it is within the drive. For the sake of clarity the stacking ribs are not shown in figures 11 and 12.

8.13.1 Locking mechanism (figure 12)

This International Standard does not specify the actual implementation of the locking mechanism. However, functionally it shall satisfy the following requirements in the locked position:

- the angular resolution shall not be greater than 6° ;
- the reel shall not rotate by more than 10° when a torque not greater than 0,32 N·m is applied in the direction that will cause the tape to unwind.

The button of the locking mechanism shall be made of nylon 6/6 with $2\% \pm 1\%$ molybdenum disulphide.

Its dimensions shall be

$$d_9 = 2,0 \text{ mm} \pm 0,5 \text{ mm}$$

$$d_{10} = 10,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$\rho = 15^\circ \pm 2^\circ$$

8.13.2 Axis of rotation of the reel

The axis of rotation of the reel shall be perpendicular to plane P (see figure 13 and 8.13.7) and pass through the centre of the central window as specified by l_{29} and l_{34} .

8.13.3 Metallic insert

The reel shall have a metallic insert made of stainless steel (ISO 683-13, type 3 or 7). It shall withstand a pull out force of 300 N min. Its dimensions shall be

$$d_2 = 35,00 \text{ mm} \begin{array}{l} + 0,20 \text{ mm} \\ - 1,20 \text{ mm} \end{array}$$

$$d_3 = 11,15 \text{ mm} \pm 0,05 \text{ mm}$$

$$e_1 = 1,51 \text{ mm} \pm 0,10 \text{ mm}$$

Its central opening (diameter d_3) shall be concentric with the axis of rotation of the reel within 0,15 mm.

The metallic insert shall be parallel to plane P within 0,15 mm.

8.13.4 Toothed rim

The reel shall have a toothed rim accessible through the central window, and having the dimensions

$$d_4 = 36,00 \text{ mm} \begin{array}{l} + 0,50 \text{ mm} \\ - 0,00 \text{ mm} \end{array}$$

$$d_5 = 41,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$\psi = 11^\circ 3' \pm 5'$$

8.13.5 Hub of the reel

The hub of the reel shall have a diameter

$$d_6 = 50,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

Further dimensions of the hub shall be

$$l_{41} = 13,05 \text{ mm} \begin{array}{l} + 0,20 \text{ mm} \\ - 0,10 \text{ mm} \end{array}$$

when measured at the hub surface, and

$$r_{10} = 0,08 \text{ mm max.}$$

The hub shall meet the following requirements:

- the straightness of the hub surface shall be within 0,04 mm;
- the perpendicularity to the plane P through the pitch line of the teeth of the rim (see 8.13.7) shall be within 0,07 mm;
- the ratio of the difference in the diameters d_6 of any two sections (perpendicular to the axis) to the distance between these sections shall not exceed 0,003 8;
- the rate of change across the width of the hub surface shall not exceed 0,025 mm mm/mm;
- the total runout of the hub related to the cylinder perpendicular to the circular pitch line (see 8.13.7) of the teeth of the toothed rim shall not exceed 0,2 mm total indicator reading (TIR).

8.13.6 Relative positions

8.13.6.1 With the cartridge in hand (figure 11):

- the distance of the tip of the button of the locking mechanism to Reference Surface C shall be

$$l_{42} = 1,90 \text{ mm} \begin{array}{l} + 1,40 \text{ mm} \\ - 0,90 \text{ mm} \end{array}$$

- the distance from the bottom surface of the metallic insert to Reference Surface C shall be

$$l_{43} = 0,4 \text{ mm} \begin{array}{l} + 1,0 \text{ mm} \\ - 0,5 \text{ mm} \end{array}$$

8.13.6.2 Whether the cartridge is in hand or in the drive (figures 11 and 12):

- the distance from the bottom surface of the metallic insert to plane P shall be

$$l_{44} = 2,27 \text{ mm} \pm 0,12 \text{ mm}$$

- the distance of the inside of the lower flange of the reel to plane P shall be

$$l_{45} = 0,65 \text{ mm} \pm 0,09 \text{ mm}$$

8.13.6.3 With the cartridge in the drive (figure 12):

- the distance from the tip of the button of the locking mechanism to Reference Surface C shall be

$$l_{46} = 8,1 \text{ mm} \pm 0,2 \text{ mm}$$

- the force required to move the button into this position shall not exceed 12,25 N,

- the distance from the centreline of the tape to Reference Surface C shall be

$$l_{47} = 12,25 \text{ mm nominal}$$

- the distance from the Reference Surface C to plane P (see 8.13.7) shall be:

$$l_{60} = 5,04 \text{ mm} \pm 0,20 \text{ mm}$$

8.13.7 Characteristics of the toothed rim (figure 13)

The toothed rim shall comprise 60 teeth spaced at an angle of

$$6^{\circ}0' \pm 5' \text{ non-cumulative}$$

The teeth are specified at the pitch diameter d_5 by

$$l_{48} = 4 \text{ mm nominal}$$

$$l_{49} = 2 \text{ mm nominal}$$

$$\varphi = 30^{\circ} \text{ nominal}$$

The pitch line is the circumference of the teeth taken at the distance l_{49} . The plane in which it lies is the plane P mentioned above.

The blend radius at the bottom of the teeth shall be

$$r_{11} = 0,25 \text{ mm max.}$$

The blend radius at the tip of the teeth shall be

$$0,10 \text{ mm} \leq r_{12} \leq 0,30 \text{ mm}$$

8.14 Leader block (figure 14)

The leader block shall have the following dimensions:

$$l_{50} = 31,80 \text{ mm} \pm 0,04 \text{ mm}$$

$$l_{51} = 6,8 \text{ mm} \pm 0,1 \text{ mm}$$

$$l_{52} = 21,8 \text{ mm} \pm 0,2 \text{ mm}$$

$$l_{53} = 10,93 \text{ mm} \begin{matrix} + 0,06 \text{ mm} \\ - 0,08 \text{ mm} \end{matrix}$$

$$l_{54} = 5,46 \text{ mm} \pm 0,10 \text{ mm}$$

$$l_{55} = 6,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{56} = 16,5 \text{ mm} \begin{matrix} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{matrix}$$

$$l_{57} = 5,2 \text{ mm} \pm 0,2 \text{ mm}$$

$$r_{13} = 25,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_{14} = 1,4 \text{ mm} \pm 0,2 \text{ mm}$$

$$r_{15} = 5,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$d_7 = 7,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$d_8 = 4,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$\mu_1 = 90^{\circ} \pm 2^{\circ}$$

$$\mu_2 = 8^{\circ} \begin{matrix} + 0^{\circ} \\ - 3^{\circ} \end{matrix}$$

$$\mu_3 = 44^{\circ} \begin{matrix} + 0^{\circ} \\ - 3^{\circ} \end{matrix}$$

8.15 Attachment of the tape to the header block (figure 15)

There shall be a cylindrical insert for attaching the tape to the leader block. It shall cover the full width of the tape and not protrude beyond the surfaces of the leader block.

In zone Z the bottom edge of the tape (as seen in figure 15) shall be parallel to the edge of the leader block within 0,12 mm and shall be at a distance

$$l_{58} = 1,90 \text{ mm} \pm 0,26 \text{ mm}$$

from it, when measured while the tape is under tension.

When fixed to the leader block the end of the tape shall not protrude above the surface of the leader block by more than

$$l_{59} = 2,5 \text{ mm}$$

The leader block shall remain attached to the tape when a force of 10 N is applied at an angle

$$\mu_4 = 38^\circ \pm 2^\circ$$

as shown in figure 15.

8.16 Latching mechanism (figure 16)

This International Standard does not specify the actual implementation of the latching mechanism for the leader block. It specifies the position of the leader block and the forces required to pull out and to insert it.

When the leader block is latched into the case, the point defined by l_{51} and l_{54} (see figure 14) shall fall within a circle of radius 0,5 mm max. the centre of which is defined by the intersection of the two lines specified by the nominal values of l_{17} and l_{18} (see figure 4).

The pull-out force, i.e. the force required to pull the leader block and the tape attached to it out of the cartridge shall satisfy both following conditions:

- to be in the range 2,0 N to 7,5 N, and
- the product of the maximum value of the pull-out force and the displacement distance shall be less than 13 N·mm.

The insertion force shall be measured at the same angle and jaw separation speed as the pull-out force.

Procedure: Clamp the cartridge in a universal testing machine that can extract the leader block at the angle μ_5 starting at the pickup point (see figure 16). The leader block pickup point is located by the intersection of the centre lines positioned by dimensions l_{17} , l_{18} . Set the jaw separation speed to 10 mm/min, pull the leader block allowing it to pivot on the pulling pin as it exits the cartridge. Measure the distance between the point where the force first exceeds 0,5 N and the point where the maximum pull-out force is observed. The force shall be measured with a pin that fits into diameters d_7 and d_8 (see figure 14).

The insertion force, i.e. the force required to push the leader block into latched position in the cartridge shall not be greater than 12 N when measured at an angle

$$\mu_5 = 48^\circ \pm 3^\circ.$$

8.17 Tape wind

When the cartridge is viewed from the top, the tape shall be wound counter-clockwise and with the recording surface toward the hub.

8.18 Wind tension

The tape shall be wound with a tension of

2,2 N ± 0,3 N

8.19 Circumference of the tape reel

The tape shall be wound to a circumference of between 280 mm and 307 mm.

8.20 Moment of inertia

The moment of inertia of the tape reel is the ratio of the torque applied to it (complete with tape, hub and flanges) when it is free to rotate about a given axis to the angular acceleration thus produced about that axis.

The moment of inertia of the reel and tape shall be

- between $145 \times 10^{-6} \text{ kg}\cdot\text{m}^2$ and $180 \times 10^{-6} \text{ kg}\cdot\text{m}^2$ when the circumference is not less than 280 mm and less than 289 mm.
- between $160 \times 10^{-6} \text{ kg}\cdot\text{m}^2$ and $195 \times 10^{-6} \text{ kg}\cdot\text{m}^2$ when the circumference is not less than 289 mm and less than 298 mm.
- between $180 \times 10^{-6} \text{ kg}\cdot\text{m}^2$ and $216 \times 10^{-6} \text{ kg}\cdot\text{m}^2$ when the circumference is not less than 298 mm and not greater than 307 mm.
- The moment of inertia of the empty reel shall be $33,00 \times 10^{-6} \text{ kg}\cdot\text{m}^2 \pm 3,63 \times 10^{-6} \text{ kg}\cdot\text{m}^2$.

Procedure: Torsionally oscillate the reel on an inertial dynamics unit. The oscillation period shall be measured electronically with a universal counter. The oscillation time shall then be converted to its rotational inertial value.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11559:1993

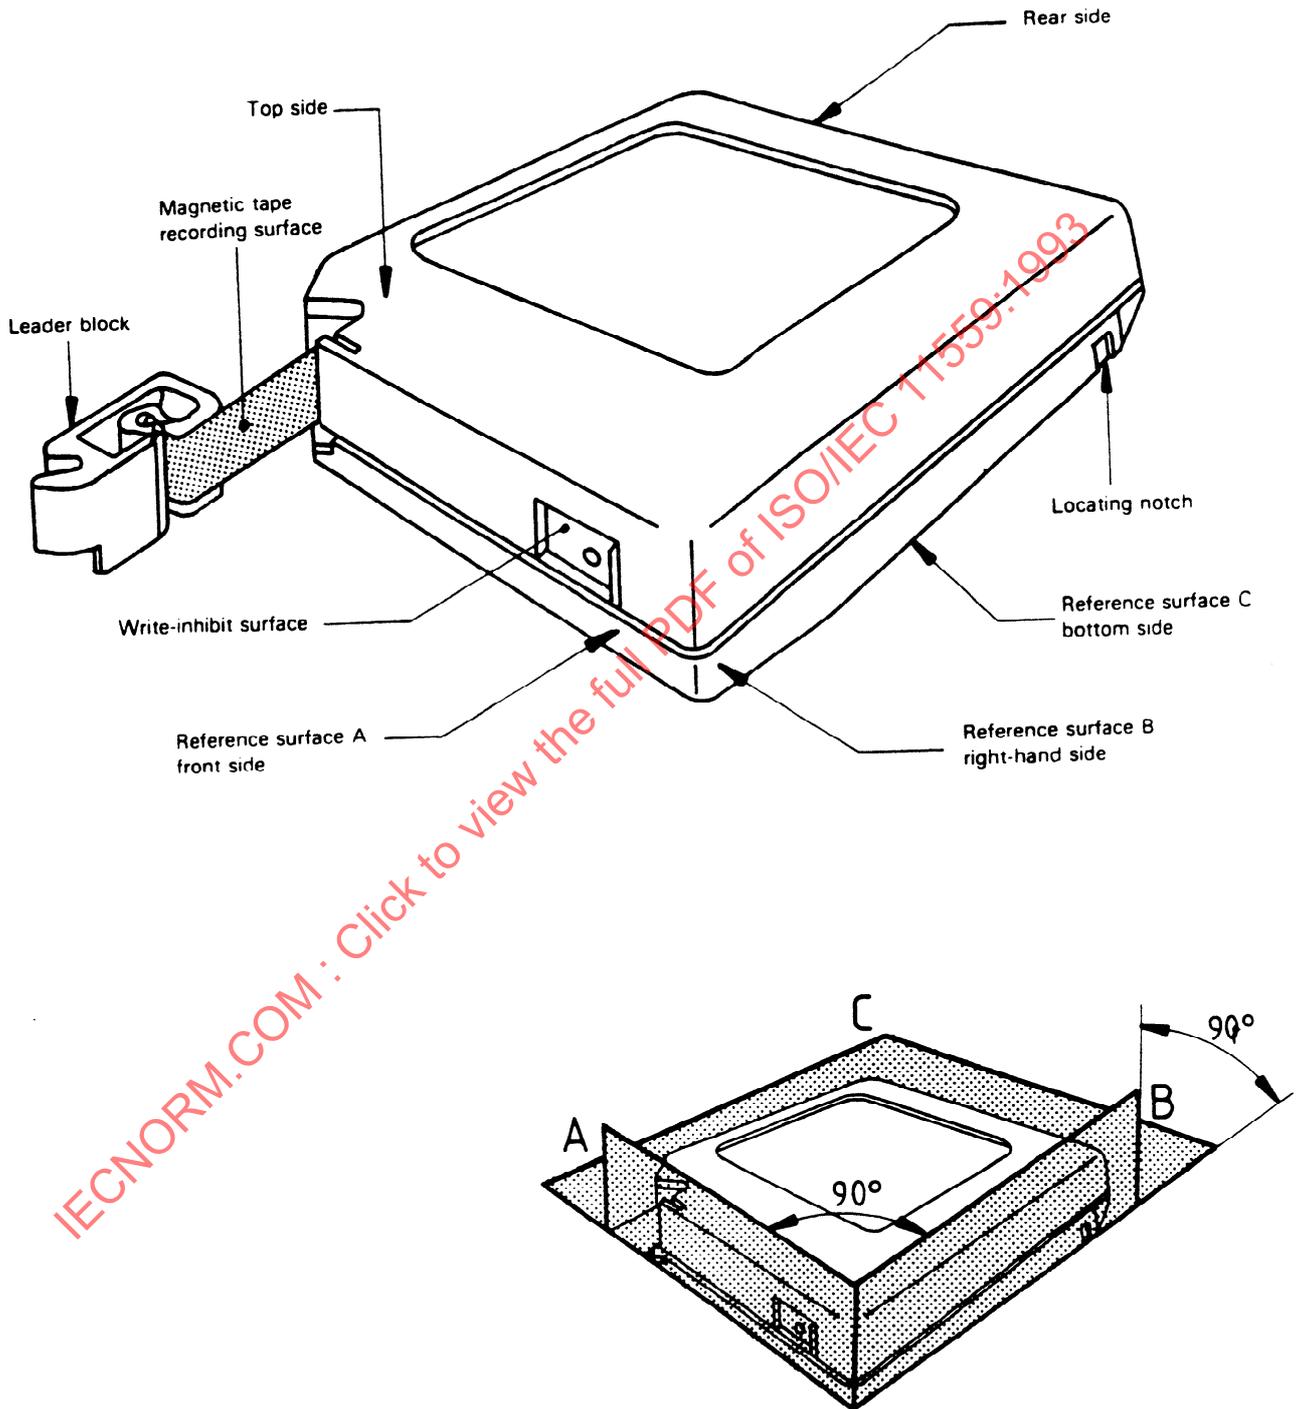


Figure 2 - General view of cartridge

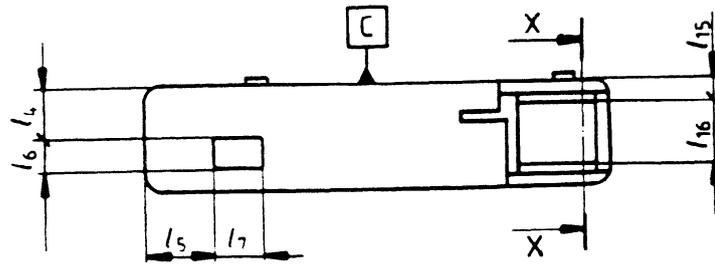


Figure 3 - Front side of case

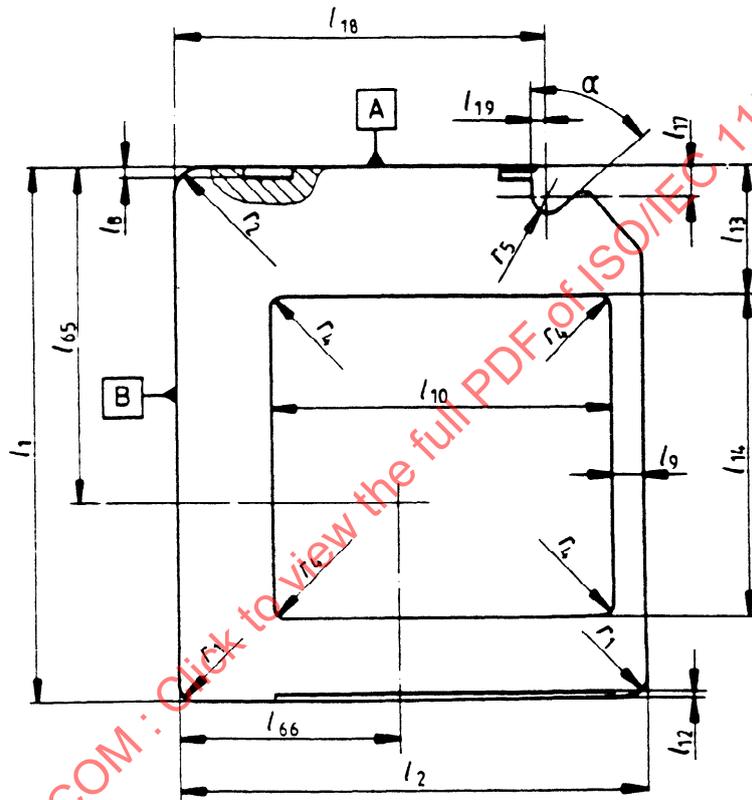


Figure 4 - Top side of case

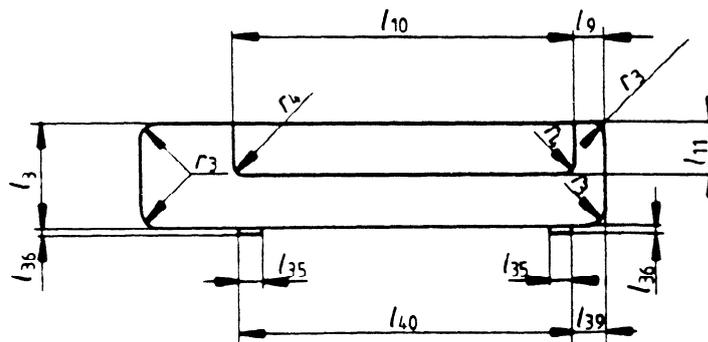


Figure 5 - Rear side of case

IECNORM.COM : Click to view the full PDF of ISO/IEC 11559:1993

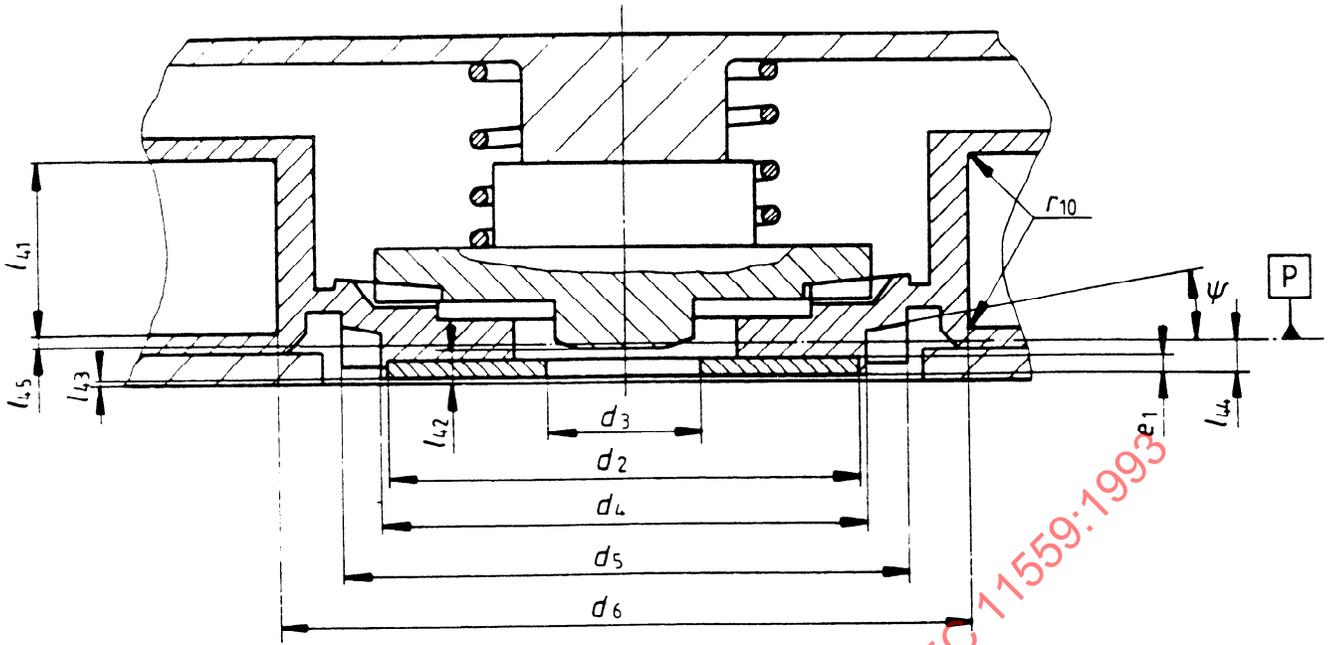


Figure 11 - Cross-section of the cartridge in hand

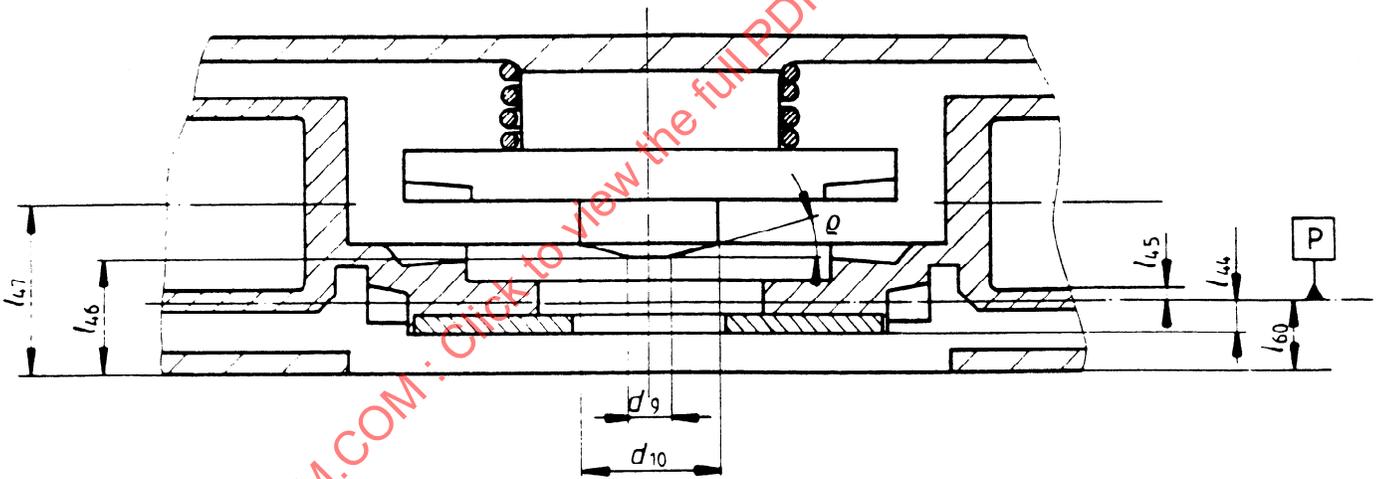


Figure 12 - Cross-section of the cartridge in the drive

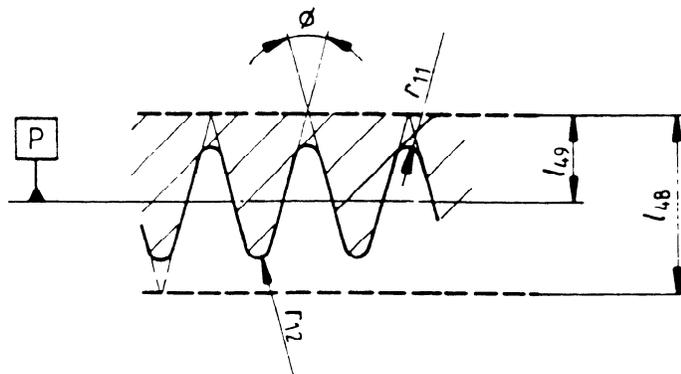


Figure 13 - Teeth of the toothed rim

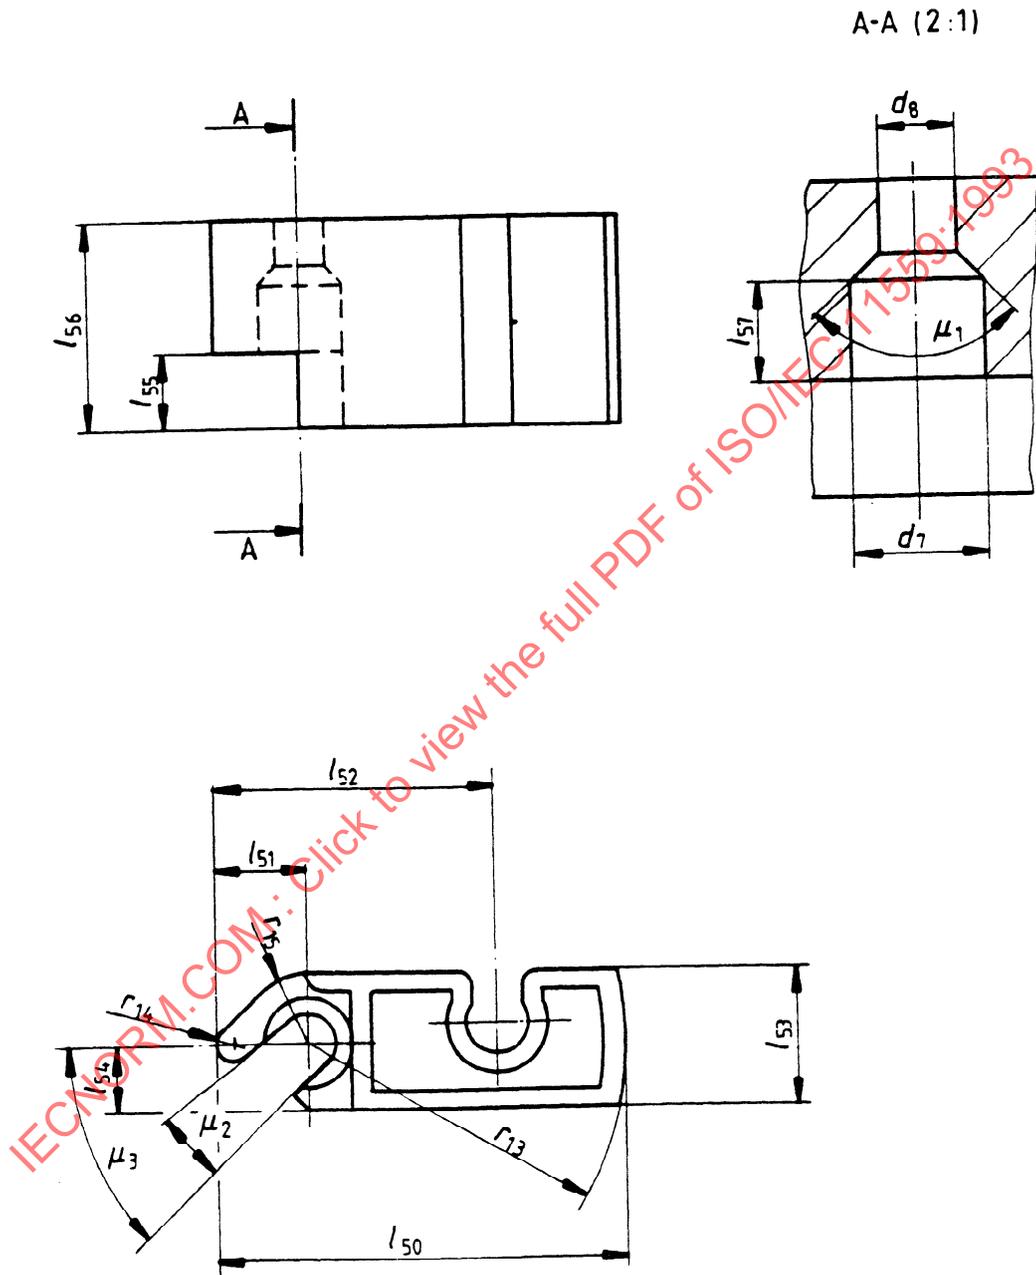


Figure 14 - Cross-section of leader block

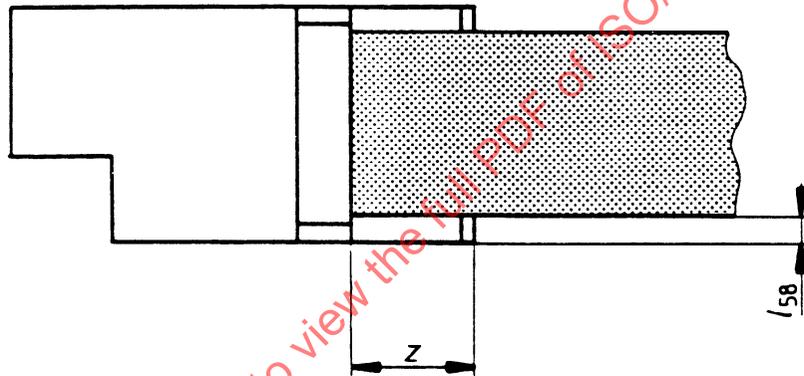
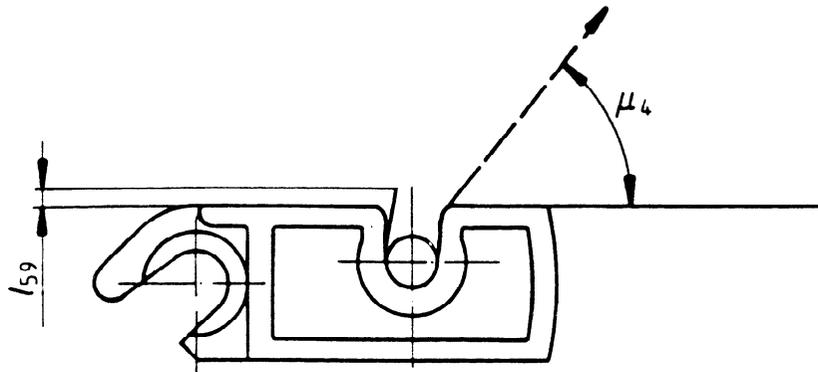


Figure 15 - Fixation of tape to leader block

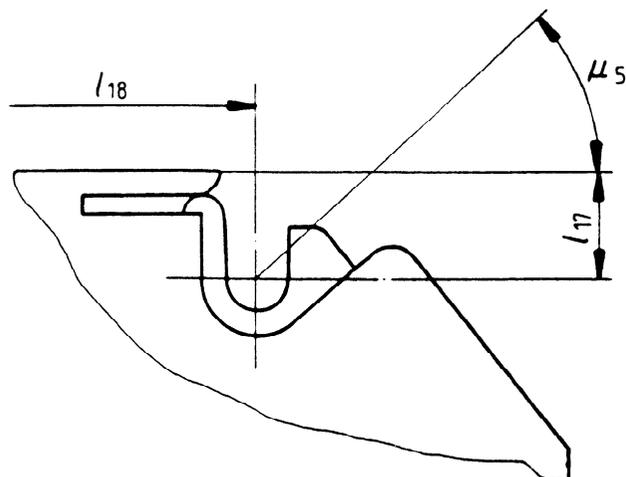


Figure 16 - Leader block in case

Section 4 - Recording method and formats

9 Method of recording

The method of recording shall be

- a ZERO is represented by a flux transition at the beginning of a bit cell followed by a flux transition at the centre of the bit cell;
- a ONE is represented by a flux transition at the beginning of a bit cell.

9.1 Physical recording density

The physical recording density shall be:

- for all ZEROS: 1 944 ftpmm
- for all ONES : 972 ftpmm

9.2 Bit cell length

The resulting nominal bit cell length is 1,029 μm .

9.3 Average bit cell length

The average bit cell length shall be the sum of n bit cell lengths divided by n .

9.4 Long-term average bit cell length

The long-term average bit cell length shall be the average bit cell length taken over a minimum of 972 000 bit cells. The long-term average bit cell length shall be within $\pm 4\%$ of the nominal bit cell length.

9.5 Short-term average bit cell length (STA)

The short-term average bit cell length shall be the average taken over 16 bit cells. The short-term average bit cell length shall be within $\pm 7\%$ of the nominal bit cell length.

9.6 Rate of change

The rate of change of the STA shall not exceed 1,6 %.



$$100 \times \frac{|STA_n - STA_{n+1}|}{STA_n} \leq 1,6 \%$$

9.7 Bit shift

The maximum displacement of any ONES zero crossing, exclusive of missing pulses, shall not deviate by more than 28 % from the expected nominal position as defined by the average bit cell length. See annex G for the test procedure.

9.8 Total character skew

No bit belonging to the same written transverse column shall be displaced by more than 19 bit cell lengths when measured in a direction parallel to the Reference Edge (see 10.2) of the tape.

9.9 Read signal amplitude

The average signal amplitude of an interchanged cartridge averaged over 4 000 flux transitions at 972 ftpmm shall be between 60 % and 150 % of the Standard Reference Amplitude. Averaging for the interchanged cartridge may be segmented into blocks.

Traceability to the Standard Reference Amplitude is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

9.10 Coincident missing pulse zones

No block shall be recorded over a coincident missing pulse zone. Such a zone shall be erased as specified in 13.4.

10 Track format

10.1 Number of tracks

There shall be 18 tracks.

10.2 Reference edge

The reference edge of the tape is its bottom edge when viewing the recording surface of the tape with the hub end of the tape to the observer's right (see 13.8.2).

10.3 Track positions

The distance from the centrelines of the tracks to the reference edge shall be

Track 1	: 11,68 mm
Track 2	: 11,05 mm
Track 3	: 10,42 mm
Track 4	: 9,79 mm
Track 5	: 9,16 mm
Track 6	: 8,53 mm
Track 7	: 7,90 mm
Track 8	: 7,27 mm
Track 9	: 6,64 mm
Track 10	: 6,01 mm
Track 11	: 5,38 mm
Track 12	: 4,75 mm
Track 13	: 4,12 mm
Track 14	: 3,49 mm
Track 15	: 2,86 mm
Track 16	: 2,23 mm
Track 17	: 1,60 mm
Track 18	: 0,97 mm

The tolerance shall be $\pm 0,04$ mm for all tracks.

10.4 Track width

The width of a written track shall be $0,540 \text{ mm} \pm 0,017 \text{ mm}$.

10.5 Azimuth

On any track the angle that a flux transition across the track makes with a line perpendicular to the Reference Edge shall not be greater than 3' of arc.

Note 7 - At the time of writing the tape, the azimuth should be less than 1' of arc. The remaining 2' of arc is the allowance for tape distortion caused by environmental conditions and ageing.

11 Packet format

11.1 Packet elements (figure 16)

A packet shall consist of

Packet ID
UDR
Packet Trailer




Figure 17 - Packet format

11.2 Packet ID

The Packet ID shall consist of 32 bytes numbered 1 to 32. The Packet ID shall not be processed.

Bytes 1 to 6 constitute the Packet Block-ID.

Byte 1 shall be set to 10000000

Byte 2

Bit 1 shall be set to ZERO

Bits 2 to 8 shall express, in binary notation, the value of the Physical Position Indicator at that point along the tape.
See annex K for the method of calculation.

Bytes 3 to 6 shall express, in binary notation, the UDR identification. The count shall be set to 0 for the first data block or Tape Mark following the initial interblock gap.

It shall be increased by 1 for each UDR and each Tape Mark. It shall not be increased for TCRs (see 13.9).

Bytes 7 to 10 shall express, in binary notation, a value equal to the total number of data bytes in the Packet Data Field, minus 1.

Byte 11 shall express, in binary notation, a value equal to the number of the bytes in the Packet Trailer. The sum of Bytes 7 to 10 and Byte 11 shall be equal to the total number of bytes in the packet, minus 1.

Byte 12

Bit 1 when set to ZERO, shall indicate that this packet is not the last packet of the data block, when set to ONE shall indicate that this packet is the last packet of the data block.

Bit 2 when set to ZERO, shall indicate that the data has not been processed, when set to ONE shall indicate that the data has been processed.

- Bits 3 to 8 shall be all ZEROs.
- Byte 13 when bit 2 of Byte 12 is set to ZERO, Byte 13 shall be set to all ZEROs,
when this bit 2 is set to ONE, Byte 13 shall contain in binary notation the identification of the algorithm used to process the UDR data.
- Note 8 - Cartridges that were written prior to the registration of compression algorithms may have an identifier set to 0 instead of the registered integer value for the algorithm that was applied when the cartridge was actually written.
- Bytes 14 to 30 shall be set to all ZEROs.
- Bytes 31 and 32 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the previous 30 bytes, as described in annex J.
- The data from the Packet ID bytes shall be inverted before processing in the CRC generator. The bits in the CRC character shall be inverted before appending to the first 30 bytes of the Packet ID.

11.3 UDR

The UDR shall contain either all processed data, or all unprocessed data, as indicated by Byte 12, bit 2 of the Packet ID.

11.4 Packet Trailer

There are two forms of Packet Trailer; one form is used in packets containing processed data, and the other in packets containing unprocessed data. Packet Trailer bytes shall not be processed.

11.4.1 Packet Trailer when data has been processed

The Packet Trailer shall be 10 to 41 bytes in length.

- Bytes 1 to 4 shall express, in binary notation, a count of the number of bytes from the LDR in the packet, (i.e. before processing).
- Bytes 5 and 6 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the LDR in the packet, (i.e. before processing), as described in annex J.
- Bytes 7 and 8 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the UDR in the packet (i.e. after processing), and the first six bytes of the Packet Trailer, as described in annex J.
- Pad Bytes A sufficient number of Pad Bytes, in the range 0 to 31, shall be added to the Packet Trailer such that the entire packet consists of an integral multiple of 32 bytes.

Packet Trailer CRC Bytes

The penultimate and ultimate bytes of the Packet Trailer shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the UDR (i.e. after processing), and the preceding bytes in the Packet Trailer, as described in annex J.

The input shall be inverted before processing in the CRC generator. The bits in the CRC character shall be inverted before appending to the rest of the bytes of the Packet Trailer.

11.4.2 Packet Trailer when data has not been processed

The Packet Trailer shall be 2 to 33 bytes in length.

- Pad Bytes There shall be 0 to 31 Pad bytes such that the entire packet consists of an integral multiple of 32 bytes.

Packet Trailer CRC bytes

The penultimate and ultimate bytes of the Packet Trailer shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the LDR in the Packet, and the preceding Pad bytes in the Packet Trailer, as described in annex J.

The input shall be inverted before processing in the CRC generator. The bits in the CRC character shall be inverted before appending to the rest of the bytes of the Packet Trailer.

12 Data Block format

12.1 Data Part (figure 17)

The Data Part of a Data Block shall consist of one or more packets, sequentially appended, followed by a Count Field and the Block-ID.

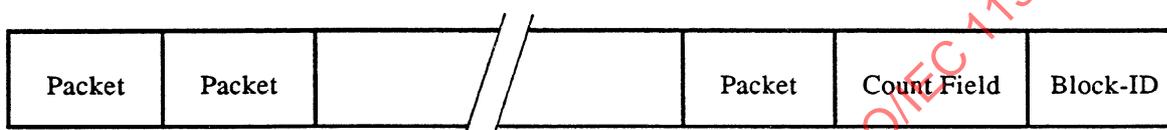


Figure 18 - Data Part

The total number of bytes, after processing, in the packets shall not exceed 102 400 bytes. The process of appending packets shall be terminated if a Tape Mark (see 13.5) is to be written or if no more packets are available. It may also be terminated for any other appropriate reason.

If a single packet exceeds 102 400 bytes the data shall be written in the format defined in ISO 9661.

The bytes of this Data Part are termed Data Bytes and comprise Packet Bytes, Count Field Bytes and Block-ID Bytes.

12.1.1 Packet Bytes

Packet Bytes comprise UDR Bytes, Packet-ID Bytes and Packet Trailer Bytes.

12.1.2 Count Field Bytes

The Count Field shall comprise 6 bytes. These bytes shall follow the last Packet Trailer Byte.

Bytes 1 and 2 shall contain, in binary notation, a value equal to the number of packets contained in the Data Block.

Bytes 3 to 6 shall contain, in binary notation, a value calculated before processing as follows: for each LDR in the Data Block a sub-total shall be computed by dividing the number of bytes by 32 and adding 1 if there is a remainder. The sum of these sub-totals shall be the value recorded in these bytes.

12.1.3 Block-ID Bytes

The Block-ID shall comprise 4 bytes. These bytes shall follow the Count Field Bytes. The bits shall be numbered from 1 (most significant) to 32 (least significant).

Bit 1 shall be set to ZERO.

Bits 2 to 8 shall express, in binary notation, the value of the Physical Position Indicator at that point along the tape. See annex K for the method of calculation.

Bit 9 shall be set to ONE.

Bit 10 shall be set to ZERO.

Bits 11 to 32 shall express, in binary notation, the same count that is contained in a Packet Block-ID for the first Packet in the Data Block (see 11.2, Bytes 3 to 6).

These 32 bits shall be assigned to the positions shown in figure 19:

Byte sequence	1	2	3	4
Bits	1 to 8	9 to 16	17 to 24	25 to 32

Figure 19 - Block-ID Bytes

12.2 Allocation of Data Bytes to frames

The Data Bytes shall be arranged in groups, called frames, completed with check characters. These frames shall, in turn, be arranged in a given sequence together with additional groups of bytes having prescribed bit patterns. The Data Bytes arranged in this manner and additional bytes shall then be recorded on the tape according to a specific coding scheme (see 12.4).

A frame shall be a section across all 18 tracks which contains logically related 8-bit bytes, one byte per track. Each byte in a frame is recorded along a track (see figure 20).

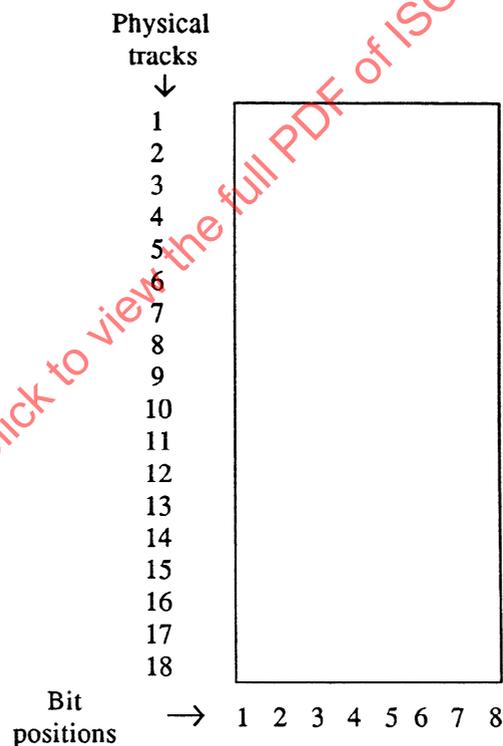


Figure 20 - Frame

There are four types of frame:

- Prefix Frames
- Data Frames
- Residual Frames
- Suffix Frames

The following types of byte are used in frames:

- Data Bytes
- Pad Bytes
- Residual Bytes
- Diagonal Redundancy Check Bytes

Vertical Redundancy Check Bytes
CRC Bytes

A Data Block shall have the structure shown in figure 21:

Prefix the first two frames
Data Frames up to 7 314 frames grouped in clusters
Residual Frames Residual Frame 1 and Residual Frame 2, or Residual Frame 2 only
Suffix the last two frames

Prefix	1st Data Cluster	2nd Data Cluster	//	last Data Cluster	Residual 1	Residual 2	Suffix
2 frames	69 frames	71 frames		up to 71 frames	1 frame	1 frame	2 frames

Figure 21 - Data Block

12.2.1 Prefix Frames

The prefix shall consist of two frames containing Pad Bytes in each track.

12.2.2 Data Frames (figure 22)

Each Data Frame shall consist of

- the first 7 Data Bytes recorded in odd tracks 1 to 13,
- the next 7 Data Bytes recorded in even tracks 2 to 14,
- a Diagonal Redundancy Check Byte (DRC-A) recorded in track 15 (see 12.3.1 and 12.3.3),
- a Vertical Redundancy Check Byte (VRC-A) recorded in track 17 (see 12.3.2 and 12.3.3),
- a Diagonal Redundancy Check Byte (DRC-B) recorded in track 16 (see 12.3.1 and 12.3.3),
- a Vertical Redundancy Check Byte (VRC-B) recorded in track 18 (see 12.3.2 and 12.3.3).

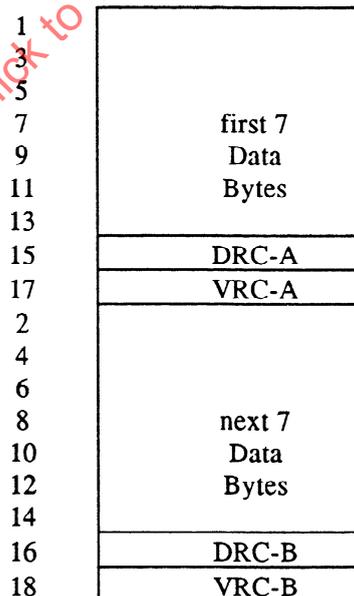


Figure 22 - Data Frame

The Data Frames are grouped in clusters as follows:

- the first cluster shall contain up to 69 frames of Data Bytes,
- the next clusters, if provided, shall contain 71 frames of Data Bytes,
- the last cluster shall contain up to 71 frames of Data Bytes.

12.2.3 Residual Frame 1 (figure 23)

If after the Data Frame of the last Data cluster 12 or 13 Data Bytes remain to be recorded, there shall be a Residual Frame 1. If the number of remaining Data Bytes is less than 12 there shall be no Residual Frame 1.

The structure of the Residual Frame 1 shall be

- 12 or 13 Data Bytes;
- 1 or 2 additional Pad Bytes, depending on the number of remaining Data Bytes;
- in tracks 15 and 17 the DRC-A and the VRC-A, respectively;
- in tracks 16 and 18 the DRC-B and the VRC-B, respectively.

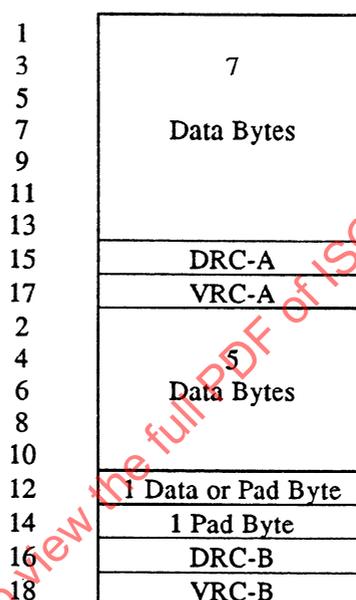


Figure 23 - Residual Frame 1

12.2.4 Residual Frame 2 (figure 24)

If there is no Residual Frame 1, i.e. if there are eleven or less remaining Data Bytes, these Data Bytes followed by sufficient additional Pad Bytes to total 11 bytes shall be recorded in odd tracks 1 to 13 and even tracks 2 to 8.

If there is a Residual Frame 1, odd tracks 1 to 13 and even tracks 2 to 8 shall be recorded with additional Pad Bytes.

In either case

- track 10 shall be recorded with the Residual Byte (see 12.2.4.1);
- tracks 12 and 14 with the CRC Byte 1 and the CRC Byte 2, respectively (see 12.2.4.2);
- tracks 15 and 17 with the DRC-A and the VRC-A, respectively;
- Tracks 16 and 18 with the DCR-B and the VRC-B, respectively.

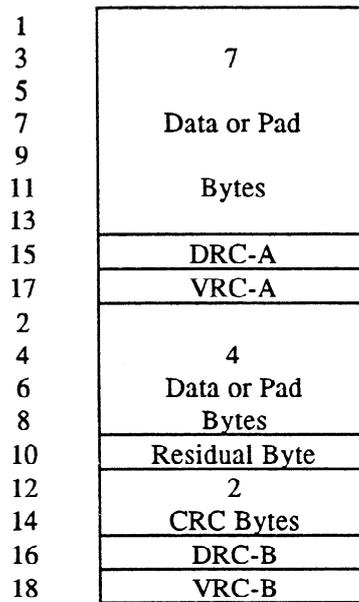


Figure 24 - Residual Frame 2

12.2.4.1 Residual Byte

The Residual Byte shall be recorded in track 10 of the Residual Frame 2. Its bits are numbered from 1 (most significant) to 8 (least significant).

Bits 1 and 2 shall be unspecified, they can be a ONE or a ZERO.

Bits 3 and 4 shall be ONES.

Bits 5 to 8 shall express in binary notation the total number of additional Pad Bytes in the Residual Frame(s).

12.2.4.2 Cyclic Redundancy Check Character (CRC)

Tracks 12 and 14 of the Residual Frame 2 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the Data Bytes, the additional Pad Bytes and the Residual Byte, as described in annex J.

This does not include the ECC Bytes (see 12.3).

12.2.4.3 Summary of requirements for Residual Frames

Table 4 summarizes the requirements for Residual Frame 1 and Residual Frame 2.

Table 4 - Requirements for Residual Frames

Number of Data Bytes remaining after the last complete Data Frame			Residual Frame 1				Residual Frame 2					
Packet Bytes	Count Field Bytes	Block -ID Bytes	Packet Bytes	Count Field Bytes	Block -ID Bytes	Add. Pad Bytes	Packet Bytes	Count Field Bytes	Block -ID Bytes	Add. Pad Bytes	Resid. Bytes	CRC Bytes
0	0	0	No Residual Frame 1				0	0	0	11	1	2
0	0	1					0	0	1	10	1	2
0	0	2					0	0	2	9	1	2
0	0	3					0	0	3	8	1	2
0	0	4					0	0	4	7	1	2
0	1	4					0	1	4	6	1	2
0	2	4					0	2	4	5	1	2
0	3	4					0	3	4	4	1	2
0	4	4					0	4	4	3	1	2
0	5	4					0	5	4	2	1	2
0	6	4					0	6	4	1	1	2
1	6	4					1	6	4	0	1	2
2	6	4					2	6	4	2	0	1
3	6	4	3	6	4	1	0	1	2			

12.2.5 Suffix Frames

The Suffix shall consist of two frames containing

- in odd tracks 1 to 13 : additional Pad Bytes
- in track 15 : DRC-A
- in track 17 : VRC-A
- in even tracks 2 to 14 : additional Pad Bytes
- in track 16 : DRC-B
- in track 18 : VRC-B

12.3 Error Correcting Code (ECC)

The Error Correcting Code yields check bits

- the Diagonal Redundancy Check (DRC)
- the Vertical Redundancy Check (VRC).

Computation of the DRCs and VRCs starts with the Prefix and ends with the Suffix.

In 12.3.1 and 12.3.2 the following notation is used:

$$T_{n_m} = \text{the } m\text{th bit of the } n\text{th track}$$

12.3.1 Diagonal Redundancy Check (DRC)

The two DRCs shall be recorded in tracks 15 and 16, respectively. The bits in each of these tracks shall be computed from the bits in all other tracks, except tracks 17 and 18. The m th bit in each of these tracks is specified by:

$$m\text{th bit of track 15} = \left\{ \sum_{n=0}^6 T(2n+1)_{m-n-1} + \sum_{n=1}^8 T(2n)_{m-n-7} \right\} \quad (\text{modulo } 2)$$

$$m\text{th bit of track 16} = \left\{ \sum_{n=0}^6 T(2n+1)_{m+n-14} + T(15)_{m-15} + \sum_{n=1}^7 T(2n)_{m+n-8} \right\} \quad (\text{modulo } 2)$$

12.3.2 Vertical Redundancy Check (VRC)

The two VRCs shall be recorded in tracks 17 and 18, respectively. The bits in each of these tracks shall be computed from the bits of the eight other tracks having the same index parity. The m th bit in each of these tracks is specified by

$$m\text{th bit of track 17} = \left\{ \sum_{n=0}^7 T(2n+1)_m \right\} \quad (\text{modulo } 2)$$

$$m\text{th bit of track 18} = \left\{ \sum_{n=1}^8 T(2n)_m \right\} \quad (\text{modulo } 2)$$

12.3.3 ECC Format

In each frame the eight bits of each DRC and each VRC shall be considered as 8-bit Check Bytes.

12.3.4 Summary of ECC¹⁾

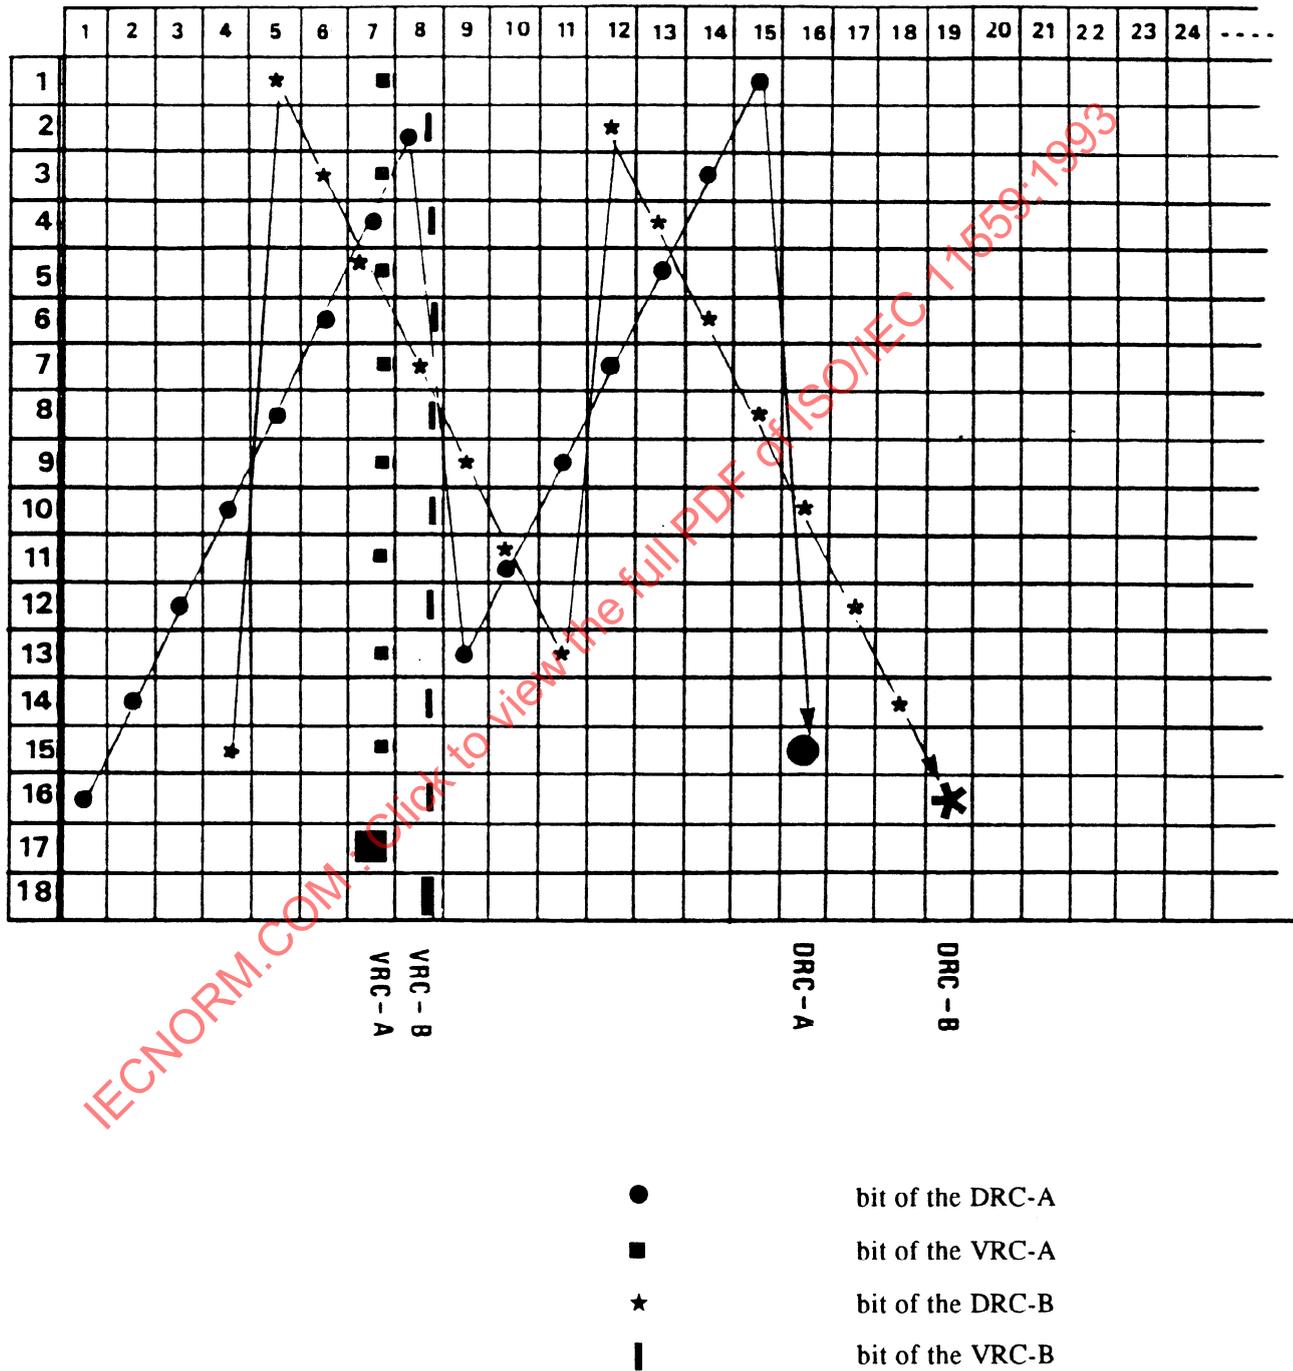


Figure 25 - Summary of Error Correction Code

¹⁾Note 9 -For a complete description of this ECC schema, see A.M. PATEL: *Adaptive cross parity (AXP) code for a high-density magnetic tape subsystem*, in *IBM Journal of Research and Development*, Vol. 29, Number 6 of November 1985.

12.4 Recording of 8-bit bytes on the tape

Each 8-bit byte, including the ECC bytes, in the Prefix, in the Data Frames, in the Residual Frame(s) and in the Suffix shall be represented by a 9-bit pattern on the tape.

Annex F specifies the 9-bit pattern representing each 8-bit byte. The bit of the 9-bit pattern in the leftmost bit position shall be recorded first (i.e. nearest to BOT).

12.5 Recorded Data Block

When recorded on the tape each Data Block shall have the structure prescribed in figure 26 and be called a Recorded Data Block.

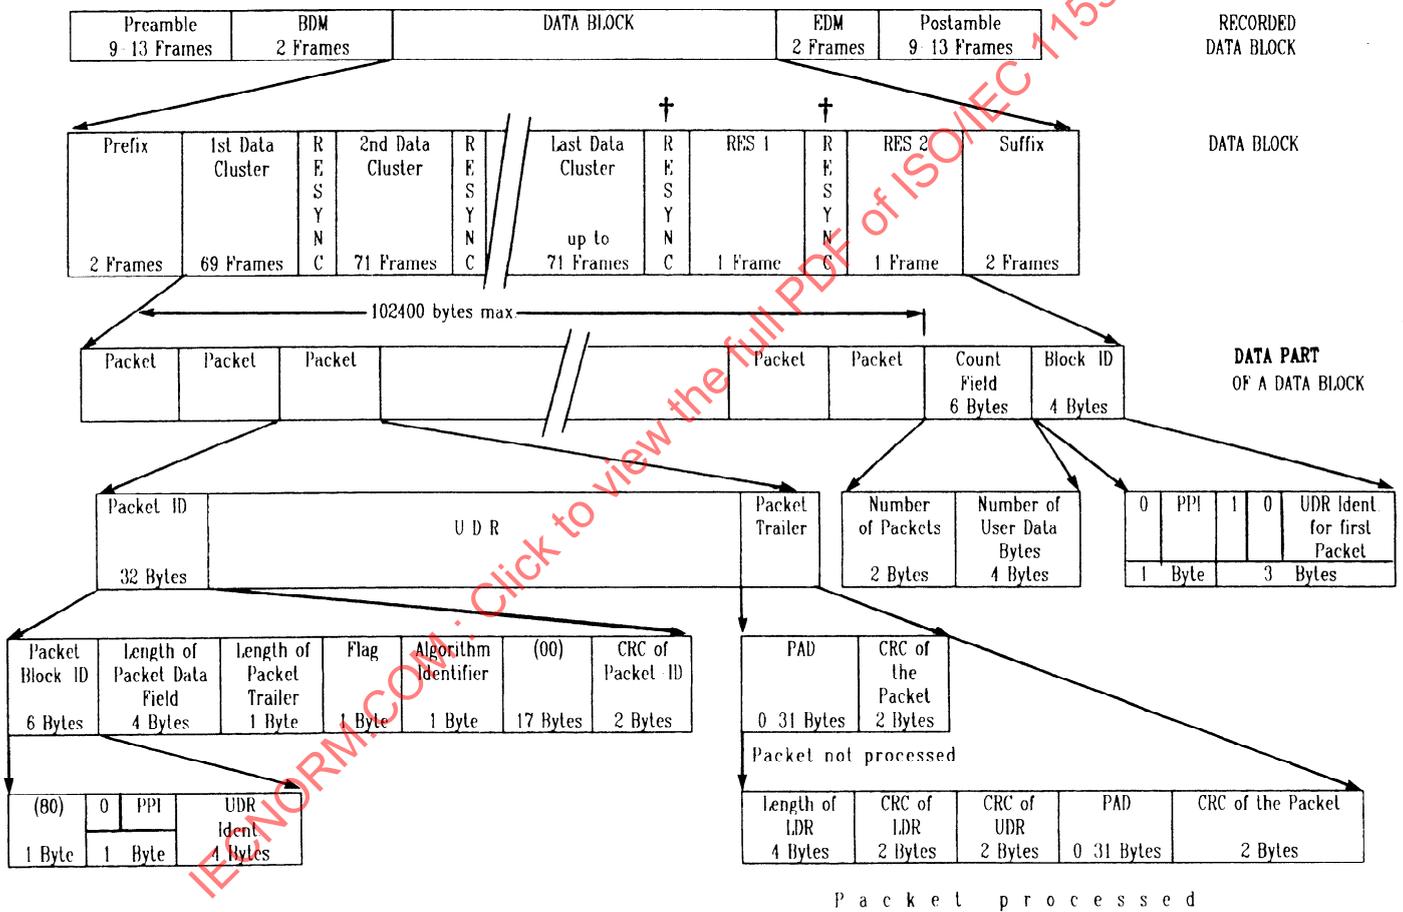


Figure 26 - Recorded Data Block

† The presence of this Resync Control Block depends on the number of preceding frames (see 12.5.3).

12.5.1 Preamble

The Preamble shall consist of between 9 and 13 frames recorded with the 9-bit pattern 11111111 in all tracks.

12.5.2 Beginning of Data Mark (BDM)

The BDM shall consist of two frames recorded with the 9-bit pattern 100010001 in all tracks.

12.5.3 Resync Control Frame

A Resync Control Frame shall have the 9-bit pattern 100010001 in all tracks. A Resync Control Frame shall be recorded after each 71 frames of the Data Block starting with the Prefix frames. If the Resync Control Frame would immediately precede the EDM, it shall not be recorded.

12.5.4 End of Data Mark (EDM)

The EDM shall consist of two frames recorded with the 9-bit pattern 100010001 in all tracks.

12.5.5 Postamble

The Postamble shall consist of between 9 and 13 frames recorded with the 9-bit pattern 111111111 in all tracks.

12.6 Data Density

Due to the ECC bytes, the 8-bit to 9-bit conversion and to the Resync Control Frames the maximum density of data bytes is

$$14 \times 972 \times \frac{1}{8} \times \frac{8}{9} \times \frac{71}{72} = 1\,491 \text{ data bytes per millimetre}$$

where

- 14 : the number of data bytes per frame,
- 972 : the number of flux transitions per mm for the all ONEs density,
- 1/8 : the inverse value of the number of bits per byte,
- 8/9 : corresponds to the recording scheme of 12.4,
- 71/72 : corresponds to the Resync Control Frames.

13 Tape format

The format of the tape is defined by the following control blocks separating and/or qualifying the Recorded Data Blocks:

- the Density Identification Burst;
- the ID Separator Burst;
- Interblock Gaps;
- Erase Gaps;
- Tape Marks.

In addition there are two Transform Change Records (see 13.9).

The five control blocks have the following recording characteristics (see figure 27):

- a) The 18 tracks are divided into six zones:
 - zone A : Tracks 1, 7, 13
 - zone B : Tracks 2, 8, 14
 - zone C : Tracks 3, 9, 15
 - zone D : Tracks 4, 10, 16
 - zone E : Tracks 5, 11, 17
 - zone F : Tracks 6, 12, 18

	A	B	C	D	E	F
1	Black	White	White	White	White	White
2	White	Black	White	White	White	White
3	White	White	Black	White	White	White
4	White	White	White	Black	White	White
5	White	White	White	White	Black	White
6	White	White	White	White	White	Black
7	Black	White	White	White	White	White
8	White	Black	White	White	White	White
9	White	White	Black	White	White	White
10	White	White	White	Black	White	White
11	White	White	White	White	Black	White
12	White	White	White	White	White	Black
13	Black	White	White	White	White	White
14	White	Black	White	White	White	White
15	White	White	Black	White	White	White
16	White	White	White	Black	White	White
17	White	White	White	White	Black	White
18	White	White	White	White	White	Black

Figure 27 - Division of tracks in zones

- b) The tracks of each zone are recorded either with the all ONEs pattern or with the repeated 6-bit pattern 100000 called tone.

13.1 Density Identification Burst

The Density Identification Burst shall be characterized by

- all ONEs in zones A, C, F
- tone in zones B, D, E

Its length shall be

nominal : 2 375 mm
 minimum : 2 250 mm
 maximum : 3 060 mm

The Density Identification Burst shall be the first recording on the tape.

13.2 ID Separator Burst

The ID Separator Burst shall be characterized by

- all ONEs in all zones.

Its length shall be

nominal : 2,0 mm
 minimum : 1,9 mm
 maximum : 2,1 mm

13.3 Interblock Gaps

The Interblock Gaps shall be characterized by

- all ONEs in zones A, D, F
- tone in zones B, C, E.

The length of each Interblock Gap shall be

nominal : 2,0 mm
 minimum : 1,6 mm
 maximum : 3,0 mm

Any discontinuity across all tracks in an Interblock Gap (e.g. due to start/stop mode) shall not be greater than 0,03 mm. Such discontinuity shall not occur less than 0,5 mm before the Preamble of a Recorded Data Block or within 0,5 mm after the Postamble of such a block.

An Interblock Gap shall be recorded immediately after the ID Separator Burst. An Interblock Gap shall be recorded before and after each Recorded Data Block, each Erase Gap (see 13.4) and each Tape Mark (see 13.5), except after the last Tape Mark on the tape.

13.4 Erase Gaps

Erase Gaps shall be characterized by

- all ONEs in zones B, C, F
- tone in zones A, D, E.

Erase Gaps shall be recorded over a length of tape where an unsuccessful write operation occurred or upon an erase instruction.

13.4.1 Normal Erase Gaps

The length of a Normal Erase Gap shall be

nominal : 7,8 mm
 minimum : 7,4 mm
 maximum : 8,2 mm

Up to 20 successive Normal Erase Gaps, separated by Interblock Gaps, are permitted to be written to cover a defective area. A defective area is an area on the tape where the requirements of 7.19 are not met.

13.4.2 Elongated Erase Gaps

The length of an Elongated Erase Gap shall be

maximum : 200 mm

An Elongated Erase Gap shall be recorded when a Normal Erase Gap and/or the following Interblock Gap are not recognized as such. Within an Elongated Erase Gap partial Interblock Gaps of not more than 1 mm are permitted to appear.

13.5 Tape Marks

Tape Marks shall be characterized by

- all ONEs in zones B, D, E
- tone in zones A, C, F.

The length of each Tape Mark shall be

nominal : 1,0 mm
 minimum : 0,7 mm
 maximum : 1,3 mm

One or more Tape Marks may be used to delimit sequences of Recorded Data Blocks.

13.6 Relationship between Interblock Gaps, Erase Gaps and Tape Marks

Where an Interblock Gap precedes or follows an Erase Gap or a Tape Mark, in six of the nine tracks the tone pattern of one of these control blocks shall extend into the ONE bits pattern of the other as specified below (see figure 28).

13.6.1 Interblock Gap followed by a Tape Mark

On tracks 1, 6, 7, 12, 13 and 18:

- 18 tone bits replace the last 18 ONE bits of the Interblock Gap.

On tracks 2, 5, 8, 11, 14 and 17:

- 18 tone bits replace the first 18 ONE bits of the Tape Mark.

13.6.2 Tape Mark followed by an Interblock Gap

On tracks 1, 6, 7, 12, 13 and 18:

- 18 tone bits replace the first 18 ONE bits of the Interblock Gap.

On tracks 2, 5, 8, 11, 14 and 17:

- 18 tone bits replace the last 18 ONE bits of the Tape Mark.

13.6.3 Interblock Gap followed by an Erase Gap

On tracks 1, 4, 7, 10, 13 and 16:

- 18 tone bits replace the last 18 ONE bits of the Interblock Gap.

On tracks 2, 3, 8, 9, 14 and 15:

- 18 tone bits replace the first 18 ONE bits of the Erase Gap.

13.6.4 Erase Gap followed by an Interblock Gap

On tracks 1, 4, 7, 10, 13 and 16:

- 18 tone bits replace the first 18 ONE bits of the Interblock Gap.

On tracks 2, 3, 8, 9, 14 and 15:

- 18 tone bits replace the last 18 ONE bits of the Erase Gap.

IECNORM.COM . Click to view the full PDF of ISO/IEC 11559:1993

13.6.5 Summary of the relationship between Interblock Gaps, Erase Gaps and Tape Marks

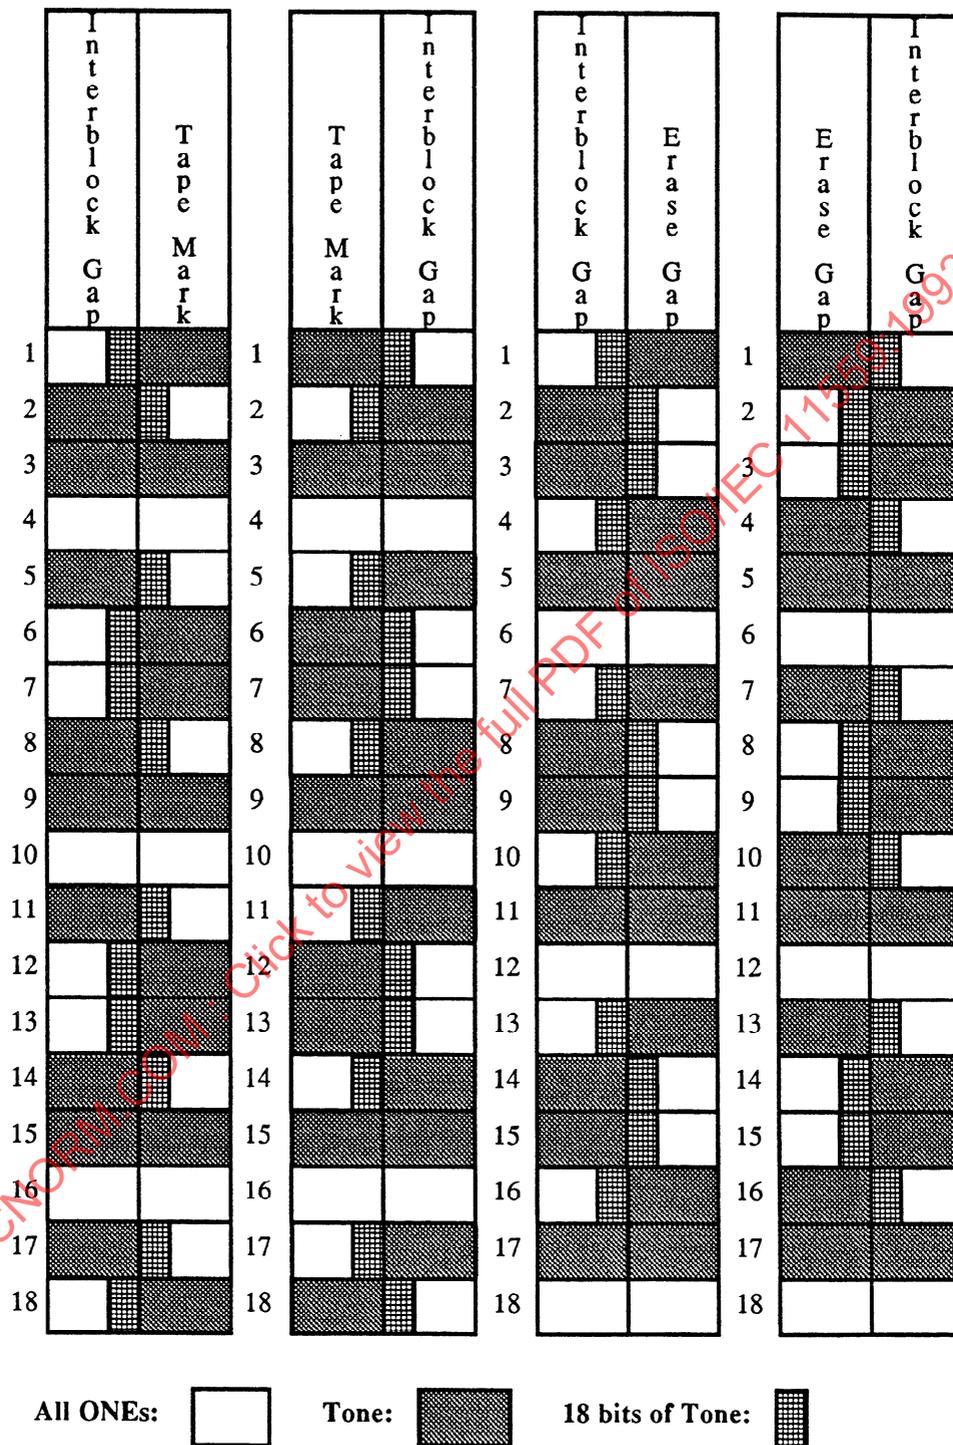


Figure 28 - Relationship between Gaps and Tape Marks

13.7 First and last recording on the tape

The first recording on the tape shall be a Density Identification Burst. It shall begin not more than 1,34 m from the leader block of the cartridge and end not less than 3,28 m from it.

The last recording on the tape shall end not less than 4,3 m from the junction of the tape to the hub of the cartridge.

13.8 Summary of the tape format

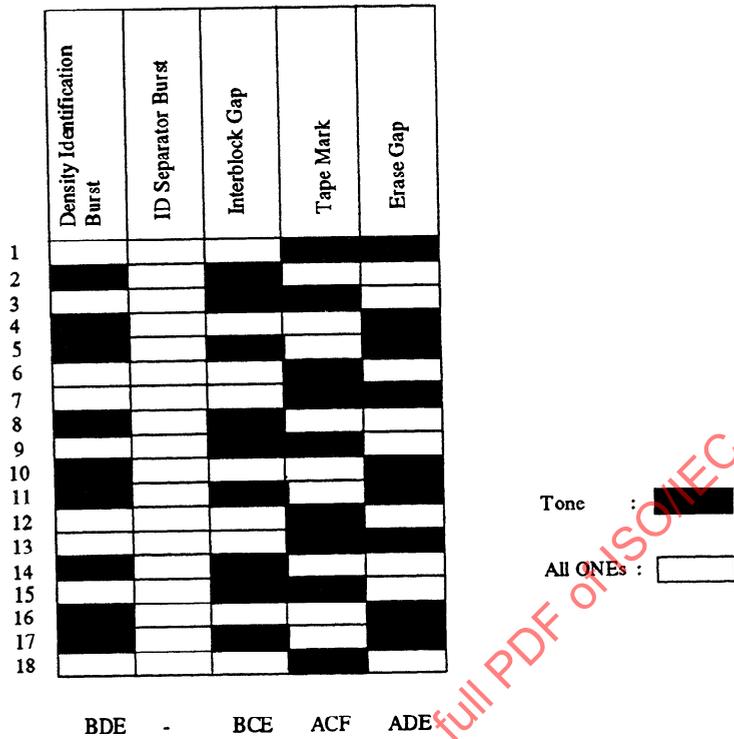


Figure 29 - Characteristics of recording other than Recorded Data Blocks

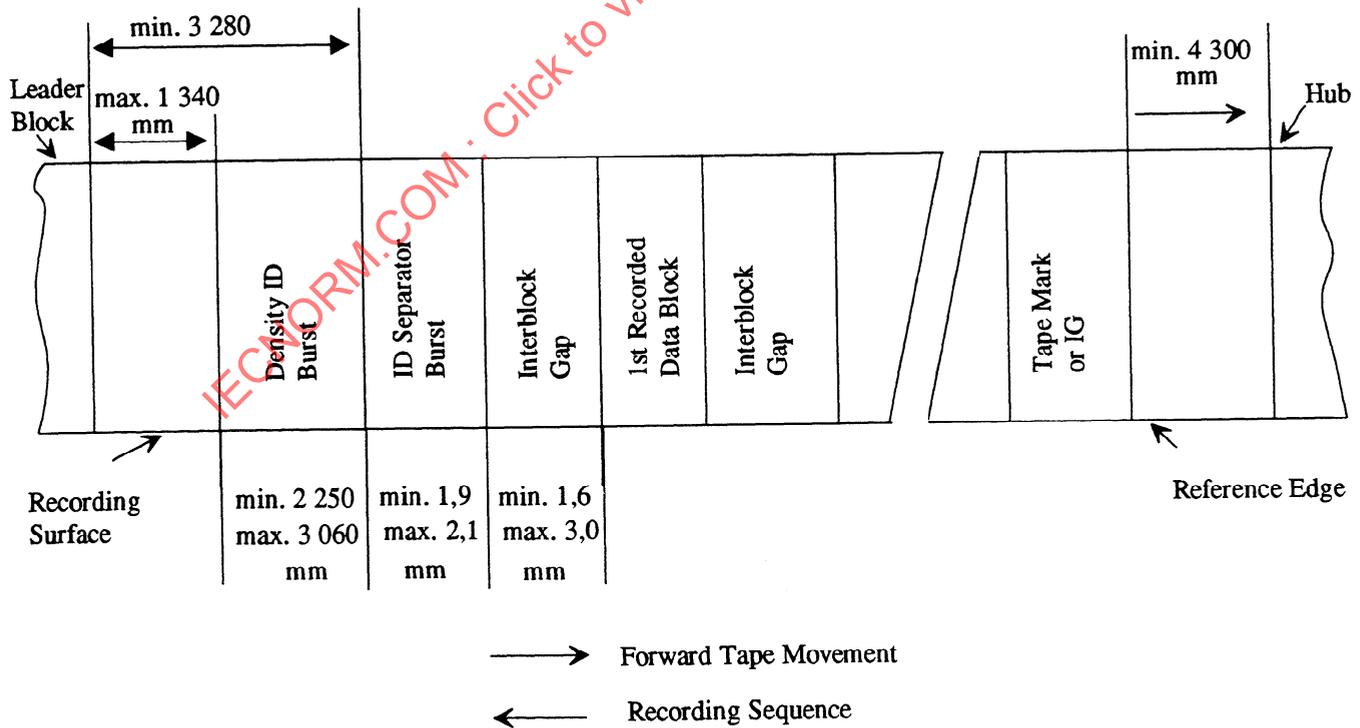


Figure 30 - Arrangement of recording on the tape

13.9 Transform Change Records (TCRs)

These special data records allow Recorded Data Blocks written after transformation as defined in this International Standard to be intermixed with Recorded Data Blocks written as defined in ISO 9661.

A TCR1 shall be written to indicate, when the tape is moving in the forward direction, that the Recorded Data Blocks are changing from the format requirements of ISO 9661 to the format requirements of this International Standard.

A TCR2 shall be written to indicate, when the tape is moving in the forward direction, that the Recorded Data Blocks are changing from the format requirements of this International Standard to the format requirements of ISO 9661.

A TCR is not required after a Tape Mark. A TCR may be written at BOT to indicate which requirements are met by the first Recorded Data Block. It is not mandatory to write a TCR after a Tape Mark or at BOT.

TCRs shall be recorded on the tape according to the format requirements of ISO 9661.

The two TCRs shall each comprise 28 bytes and shall have identical content, except for Bytes 7 and 18, as follows:

Byte 1	shall be set to 11000000
Byte 2	shall express, in binary notation, the value of the Physical Position Indicator at that point along the tape. See annex K for the method of calculation.
Bytes 3 to 6	shall be set to all ZEROS.
Byte 7	shall be set to: all ONES for TCR1 11111110 for TCR2
Bytes 8 to 14	shall be set to all ZEROS
Byte 15	shall have the same content as Byte 2
Bytes 16 and 17	shall be set to all ONES
Byte 18	shall have the same content as Byte 7
Bytes 19 to 25	shall be set to all ZEROS
Byte 26	shall be set to 00110111
Bytes 27 to 28	shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the previous 26 bytes as described in annex J.

IECNORM.COM : Click to view the full PDF of ISO/IEC 11559:1993

Annex A

(informative)

Recommendations for transportation

A.1 Environment

It is recommended that during transportation the cartridges are kept within the following conditions:

A.1.1 Unrecorded cartridges

temperature	: -23 °C to 48 °C
relative humidity	: 5 % to 100 %
wet bulb temperature	: 26 °C max.
duration	: 10 consecutive days max.

There shall be no condensation in or on the cartridge.

A.1.2 Recorded cartridges

temperature	: 5 °C to 32 °C
relative humidity	: 5 % to 80 %
wet bulb temperature	: 26 °C max.

There shall be no condensation in or on the cartridge.

A.2 Hazards

Transportation of recorded cartridges involves three basic potential hazards.

A.2.1 Impact loads and vibration

The following recommendations should minimize damage during transportation.

- a) Avoid mechanical loads that would distort the cartridge shape.
- b) Avoid dropping the cartridge more than 1 m.
- c) Cartridges should be fitted into a rigid box containing adequate shock-absorbent material.
- d) The final box shall have a clean interior and a construction that provides sealing to prevent the ingress of dirt and water.
- e) The orientation of the cartridges within the final box should be such that their axes are horizontal.
- f) The final box should be clearly marked to indicate its correct orientation.

A.2.2 Extremes of temperature and humidity

- a) Extreme changes in temperature and humidity should be avoided whenever possible.
- b) Whenever a cartridge is received it should be conditioned in the operating environment for a period of at least 24 h.