
**Hydraulic fluid power — Mounting
dimensions for accessories for single
rod cylinders, 16 MPa (160 bar)
compact series**

*Transmissions hydrauliques — Dimensions d'interchangeabilité
des accessoires pour vérins, 16 MPa (160 bar) à simple tige, série
compacte*

STANDARDSISO.COM : Click to view the full PDF of ISO 8133:2022



STANDARDSISO.COM : Click to view the full PDF of ISO 8133:2022



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	2
4 Mounting dimensions.....	2
5 Tolerances.....	2
6 Application instructions.....	2
6.1 Installation.....	2
6.2 Life spherical bearing.....	2
6.3 Lubrication.....	3
7 Designation.....	3
8 Identification statement (reference to this document).....	3
Bibliography.....	14

STANDARDSISO.COM : Click to view the full PDF of ISO 8133:2022

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 3, *Cylinders*.

This fourth edition cancels and replaces the third edition (ISO 8133:2014), which has been technically revised.

The main are as follows:

- The reference to ISO 3322 (withdrawn) has been replaced by ISO 2944 (Scope);
- [Figure 1](#) has been replaced: bearings type E are used, not type W.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit.

One component of such systems is the fluid power cylinder. This is a device that converts power into linear mechanical force and motion. It consists of a movable element, i.e. a piston and piston rod, operating within a cylindrical bore.

STANDARDSISO.COM : Click to view the full PDF of ISO 8133:2022

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 8133:2022

Hydraulic fluid power — Mounting dimensions for accessories for single rod cylinders, 16 MPa (160 bar) compact series

1 Scope

This document specifies the mounting dimensions required for interchangeability of accessories for 16 MPa (160 bar) compact cylinders conforming to ISO 6020-2. The accessories have been designed specifically for use with cylinders manufactured in accordance with ISO 6020-2, but this does not limit their application¹⁾.

This document covers the following accessories, identified in accordance with ISO 6099:

- AP6 — rod eye spherical, female thread (see [Figure 1](#) and [Table 1](#));
- AB5 — clevis bracket, spherical eye, in angle (see [Figure 2](#) and [Table 2](#));
- AA6-L — pivot pin, spherical bearing, locking plate (see [Figure 3](#) and [Table 3](#));
- AL6 — locking plate for pivot pin (see [Figure 4](#) and [Table 4](#));
- AP2 — rod clevis, female thread (see [Figure 5](#) and [Table 5](#));
- AP4 — rod eye plain, female thread (see [Figure 6](#) and [Table 6](#));
- AB2 — eye bracket (see [Figure 7](#) and [Table 7](#));
- AB4 — clevis bracket, straight (see [Figure 8](#) and [Table 8](#));
- AA4-S — pivot pin, plain (split pins) (see [Figure 9](#) and [Table 9](#));
- AA4-R — pivot pin, plain (rings) (see [Figure 10](#) and [Table 10](#));
- AT4 — trunnion bracket (see [Figure 11](#) and [Table 11](#)).

These accessories are used on hydraulic cylinders for mechanically transmitting the cylinder force. The design of these accessories is based on the maximum forces resulting from the specified internal diameters of the cylinders and pressures according to ISO 3320 and ISO 2944.

This document only applies to the dimensional criteria of products manufactured in conformity with this document; it does not apply to their functional characteristics.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-2, *Geometrical product specifications (GPS) — ISO code system for tolerances on linear sizes — Part 2: Tables of standard tolerance classes and limit deviations for holes and shafts*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

1) 1 bar = 0,1 MPa = 10⁵ Pa; 1 MPa = 1 N/mm²

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 6099, *Fluid power systems and components — Cylinders — Identification code for mounting dimensions and mounting types*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Mounting dimensions

The mounting dimensions for accessories are shown in [Figures 1](#) to [11](#) and are given in [Tables 1](#) to [11](#).

5 Tolerances

5.1 Tolerances values are given in [Figures 1](#) to [11](#).

5.2 Tolerances for other linear and angular dimensions shall be in accordance with the designation as described in ISO 2768-1.

6 Application instructions

6.1 Installation

6.1.1 A tolerance of f8 shall be used for plain bearing shafts in accordance with ISO 286-2. A tolerance of h6 should be used for the shaft fitting the spherical plain bearing bore. In exceptional cases (for example where there are difficulties in cylinder installation), a tolerance of f7 can be used. In this instance, a case-hardened shaft is recommended because movement occurs between the shaft and the bearing bore and lubrication is needed. Lubrication can be carried out through the shaft.

6.1.2 The specified tilting angle of $\pm 3^\circ$ for the spherical bearing can still be obtained even after the clevis is in place next to the side faces of the spherical plain bearing's inner ring.

6.1.3 The rod clevis and the rod eye shall be screwed firmly against the piston rod shoulder before locking.

6.2 Life spherical bearing

6.2.1 The life of the spherical plain bearing is influenced by many factors, such as the specific load, angle of oscillation, type of lubricant and frequency of lubrication.

6.2.2 The spherical plain bearings are designed to give an acceptable bearing life under normal operating conditions.

6.2.3 Where a constant unidirectional load is applied or other unusual operating conditions exist, consultation with the supplier is recommended.

6.3 Lubrication

6.3.1 Sufficient lubrication for the satisfactory performance of these accessories shall be provided.

6.3.2 The method and frequency of such lubrication depends on the particular operating conditions.

6.3.3 For maintenance-free mating parts, no additional lubrication is required.

7 Designation

Accessories conforming to this document shall be designated by the mounting type identification in accordance with ISO 6099, followed by "ISO 8133", followed by a dash, followed by the type (size) from the relevant table.

EXAMPLE 1 A rod eye spherical, female thread of type 20 ($CN = 20$) conforming to ISO 8133 is designated:

AP6 ISO 8133 - 20

EXAMPLE 2 A clevis bracket, spherical eye, in angle of type 20 ($CF = 20$) conforming to ISO 8133 is designated:

AB5 ISO 8133 - 20

EXAMPLE 3 A pivot pin, spherical bearing, locking plate of type 20 ($DK = 20$) conforming to ISO 8133 is designated:

AA6-L ISO 8133 - 20

EXAMPLE 4 A locking plate for pivot pin of type 20 ($DK = 20$) conforming to ISO 8133 is designated:

AL6 ISO 8133 - 20

EXAMPLE 5 A rod clevis, female thread of type 20 ($CK = 20$) conforming to ISO 8133 is designated:

AP2 ISO 8133 - 20

EXAMPLE 6 A rod eye plain, female thread of type 20 ($CK = 20$) conforming to ISO 8133 is designated:

AP4 ISO 8133 - 20

EXAMPLE 7 An eye bracket of type 20 ($CK = 20$) conforming to ISO 8133 is designated:

AB2 ISO 8133 - 20

EXAMPLE 8 A clevis bracket, straight of type 20 ($CK = 20$) conforming to ISO 8133 is designated:

AB4 ISO 8133 - 20

EXAMPLE 9 A pivot pin plain (plain split pins) of type 20 ($EK = 20$) conforming to ISO 8133 is designated:

AA4-S ISO 8133 - 20

EXAMPLE 10 A trunnion bracket of type 20 ($CR = 20$) conforming to ISO 8133 is designated:

AT4 ISO 8133 - 20

8 Identification statement (reference to this document)

It is strongly recommended to fabricators who elect to conform to this document to use the following statement in test reports, catalogues, and sales literature when electing to comply with this document:

"Cylinder accessory mounting dimensions conform to ISO 8133, *Hydraulic fluid power — Mounting dimensions for accessories for single rod cylinders, 16 MPa (160 bar) compact series.*"

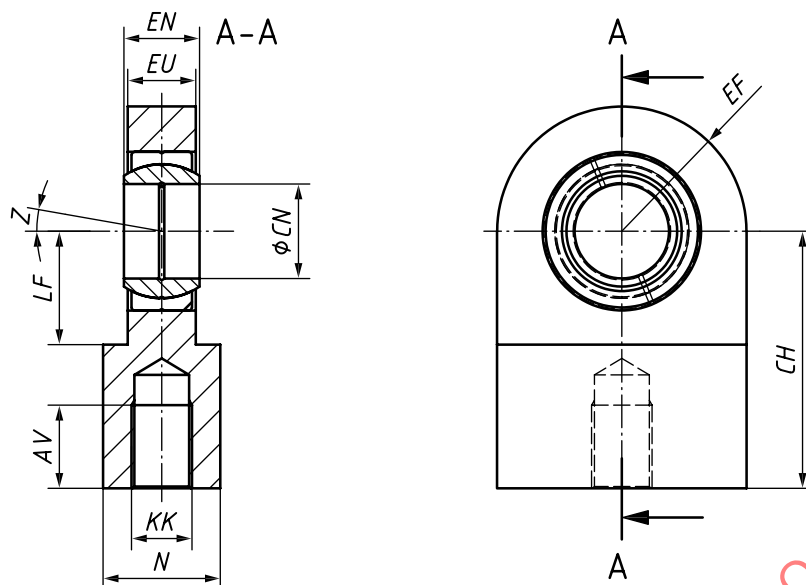



Figure 1 — AP6 — Rod eye spherical, female thread

Table 1 — Dimensions of AP6 — Rod eye spherical, female thread

Dimensions in millimetres

Type	Nominal force N	N max.	KK 6H	CN		EN		EF max.	CH js13	AV min.	LF min.	EU max.	Tilting angle Z min.
				nom.	tol. µm	nom.	tol. µm						
12	8 000	19	M10 × 1,25	12	0	10	0 -120	18	42	15	16	8,5	3°
16	12 500	22	M12 × 1,25	16	-8	14		23	48	17	20	11,5	
20	20 000	28	M14 × 1,5	20	0 -10	16		28	58	19	25	13,5	
25	32 000	31	M16 × 1,5	25		20		33	68	23	30	18	
30	50 000	37	M20 × 1,5	30	0 -12	22		41	85	29	35	20	
40	80 000	47	M27 × 2	40		28		51	105	37	45	24	
50	125 000	57	M33 × 2	50		35		61	130	46	58	31	
60	200 000	69	M42 × 2	60	0	44	0 -150	80	150	57	68	39	
80	320 000	91	M48 × 2	80	-15	55		102,5	185	64	92	48	
100	500 000	110	M64 × 3	100	0 -20	70	0 -200	120	240	86	116	57	

NOTE For spherical bearings see ISO 12240-1, type E.

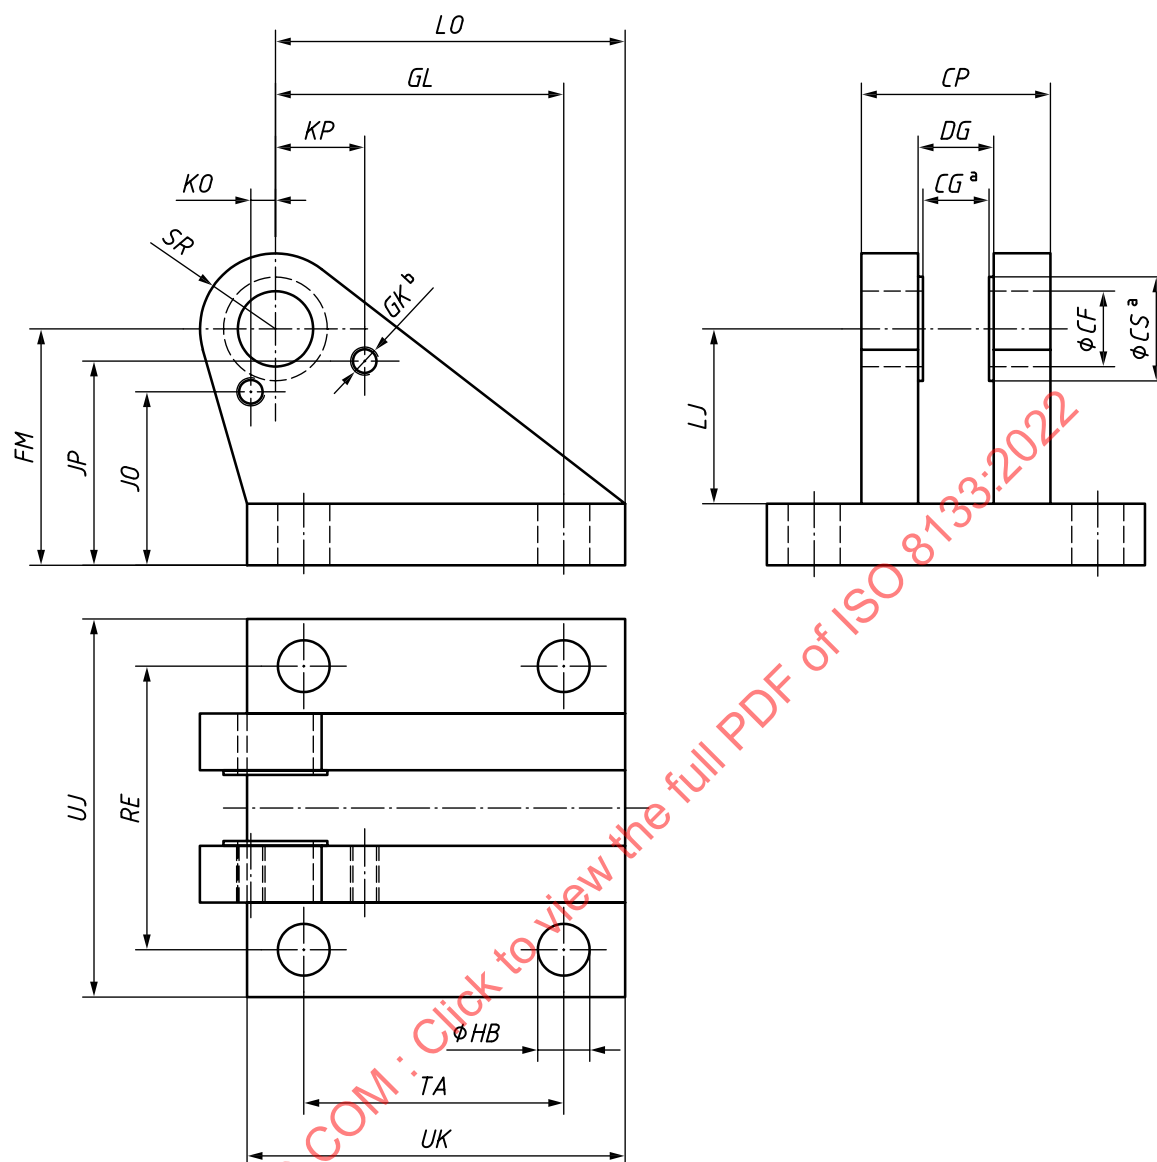

- ^a Separate spacers are permitted to maintain CG and CS dimensions.
^b Tapped holes are required only when using a pivot pin with a locking plate.

Figure 2 — AB5 — Clevis bracket, spherical eye, in angle

Table 2 — Dimensions for AB5 — Clevis bracket, spherical eye, in angle

Type	Nominal force N	CF K7	CP h14	CG +0,3 +0,1	CS min.	D/a min.	DG +2 0	FM js13	GK	HB H13	GL js13	JO ± 0,2	JP ± 0,2	KO ± 0,2	KP ± 0,2	LJ min.	LO max.	RE js13	SR max.	TA js13	UJ max.	UK max.
12	8 000	12	30	10	16	9	12	40	M6	9	46	29,1	33,2	3,9	11,6	29	56	55	12	40	75	60
16	12 500	16	40	14	22	12	16	50	M6	11	61	36,7	43,2	5,2	18,9	38	74	70	16	55	95	80
20	20 000	20	50	16	25	12	19	55	M6	14	64	38,3	44,7	8,5	15,6	40	80	85	20	58	120	90
25	32 000	25	60	20	30	12	24	65	M6	16	78	48,5	48,5	11	14	49	98	100	25	70	140	110
30	50 000	30	70	22	35	12	26	85	M6	18	97	66	66	15	15	63	120	115	30	90	160	135
40	80 000	40	80	28	47	16	32	100	M8	22	123	77	77	21	21	73	148	135	40	120	190	170
50	125 000	50	100	35	58	16	41	125	M8	30	155	95,5	95,5	22,5	22,5	92	190	170	50	145	240	215
60	200 000	60	120	44	68	20	50	150	M10	39	187	116,5	116,5	27,5	27,5	110	225	200	60	185	270	260
80	320 000	80	160	55	90	20	65	190	M10	45	255	146	146	30	30	142	295	240	80	260	320	340
100	500 000	100	200	70	111	20	80	210	M10	48	285	154	154	45	45	152	335	300	100	300	400	400
a Thread depth for mounting screw GK.																						

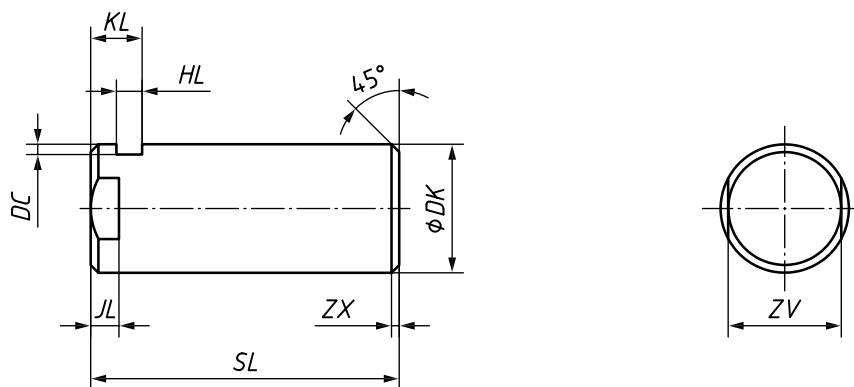


Figure 3 — AA6-L — Pivot pin, spherical bearing, locking plate

Table 3 — Dimensions of AA6-L — Pivot pin, spherical bearing, locking plate

Dimensions in millimetres

Type	Nominal force N	DK h6	SL ± 1	KL $\pm 0,5$	HL +0,2 0	JL 0 -0,2	ZV h13	DC JS13	ZX max.
12	8 000	12	40	8	3,3	4,5	10	4	1
16	12 500	16	50	8	3,3	5,5	13	4	1
20	20 000	20	62	10	4,5	5,5	17	5	1,5
25	32 000	25	72	10	4,5	5,5	22	5	1,5
30	50 000	30	85	13	5,5	7,5	24	6	2
40	80 000	40	100	16	6,5	9,5	32	7	2
50	125 000	50	122	19	9	10	41	8	2
60	200 000	60	145	20	9	11	50	9	2
80	320 000	80	190	26	11	15	70	11	3
100	500 000	100	235	30	13	15	90	14	3

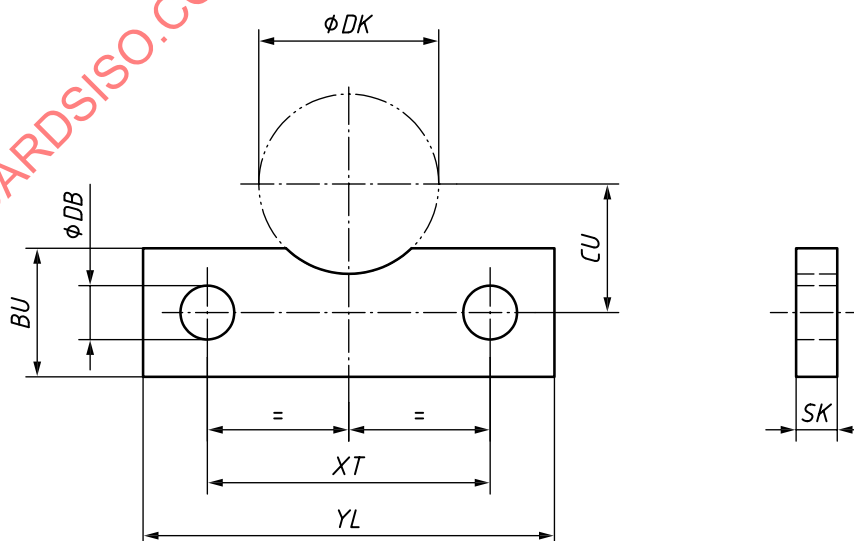
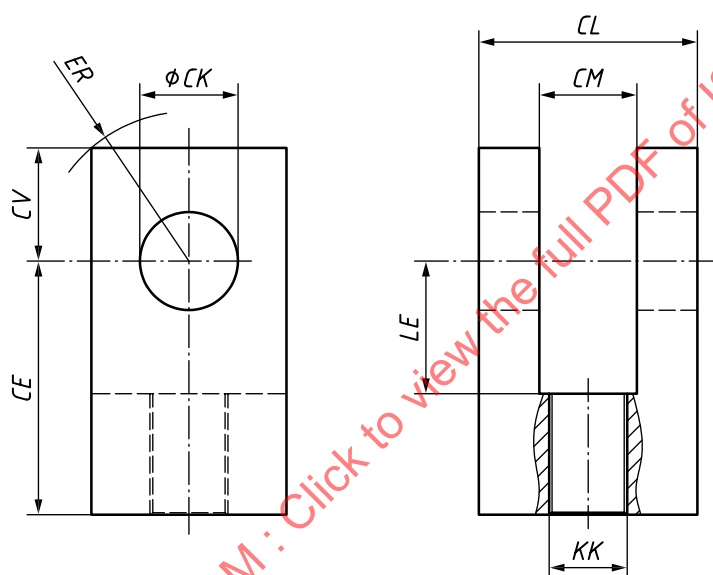


Figure 4 — AL6 — Locking plate for pivot pin

Table 4 — Dimensions of AL6 — Locking plate for pivot pin

Dimensions in millimetres

Type	DB H13	DK h6	BU JS14	CU ± 0,1	SK ± 0,2	YL JS14	XT ± 0,1	Screw
12	6,4	12	15	9,5	3	27	16	M6 × 12
16	6,4	16	15	11,5	3	40	25	M6 × 12
20	6,4	20	18	14,5	4	40	25	M6 × 16
25	6,4	25	18	16,5	4	40	25	M6 × 16
30	6,4	30	20	19	5	45	30	M6 × 16
40	8,4	40	20	23	6	62	42	M8 × 20
50	8,4	50	25	29,5	8	65	45	M8 × 20
60	10,5	60	25	33,5	8	80	55	M10 × 25
80	10,5	80	30	44	10	90	60	M10 × 25
100	10,5	100	40	56	12	120	90	M10 × 25

**Figure 5 — AP2 — Rod clevis, female thread****Table 5 — Dimensions of AP2 — Rod clevis, female thread**

Dimensions in millimetres

Type	Typical rod diameter	Typical bore	Nominal force N	KK 6H	CK H9	CM A13	CV max.	ER max.	CE JS13	LE min.	CL max.
10	12	25	8 000	M10 × 1,25	10	12	12	12	32	13	26
12	14	32	12 500	M12 × 1,25	12	16	17	17	36	19	34
16	18	40	20 000	M14 × 1,5	14	20	17	17	38	19	42
20	22	50	32 000	M16 × 1,5	20	30	29	29	54	32	62
25	28	63	50 000	M20 × 1,5	20	30	29	29	60	32	62
30	36	80	80 000	M27 × 2	28	40	34	34	75	39	83
40	45	100	125 000	M33 × 2	36	50	50	50	99	54	103
50	56	125	200 000	M42 × 2	45	60	53	53	113	57	123
60	70	160	320 000	M48 × 2	56	70	59	59	126	63	143
80	90	200	500 000	M64 × 3	70	80	78	78	168	83	163

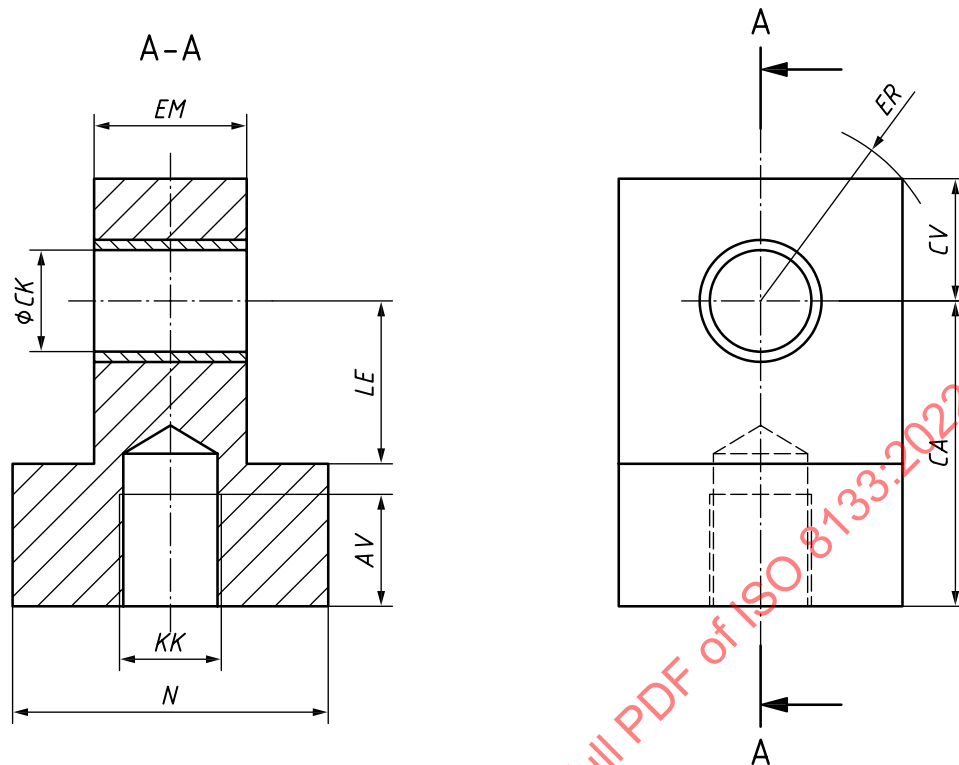


Figure 6 — AP4 — Rod eye plain, female thread

Table 6 — Dimensions of AP4 — Rod eye plain, female thread

Dimensions in millimetres

Type	Typical rod diameter	Typical bore	Nominal force N	KK 6H	CK H9	EM h13	CV max.	ER max.	CA JS13	AV min.	LE min.	N max.
10	12	25	8 000	M10 × 1,25	10	12	12	12	32	14	13	26
12	14	32	12 500	M12 × 1,25	12	16	17	17	36	16	19	34
16	18	40	20 000	M14 × 1,5	14	20	17	17	38	18	19	42
20	22	50	32 000	M16 × 1,5	20	30	29	29	54	22	32	62
25	28	63	50 000	M20 × 1,5	20	30	29	29	60	28	32	62
30	36	80	80 000	M27 × 2	28	40	34	34	75	36	39	83
40	45	100	125 000	M33 × 2	36	50	50	50	99	45	54	103
50	56	125	200 000	M42 × 2	45	60	53	53	113	56	57	123
60	70	160	320 000	M48 × 2	56	70	59	59	126	63	63	143
80	90	200	500 000	M64 × 3	70	80	78	78	168	85	83	163

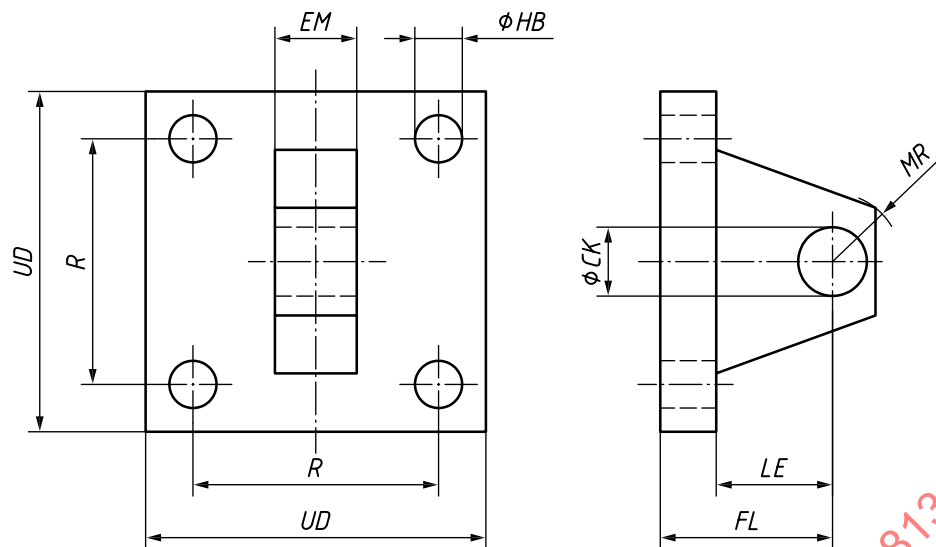


Figure 7 — AB2 — Eye bracket

Table 7 — Dimensions of AB2 — Eye bracket

Dimensions in millimetres

Type	Typical bore	Nominal force N	CK H9	EM h13	FL js13	MR max.	LE min.	UD max.	HB H13	R js13
10	25	8 000	10	12	23	12	13	40	5,5	28,3
12	32	12 500	12	16	29	17	19	46	6,6	33,2
16	40	20 000	14	20	29	17	19	65	9	41,7
20	50	32 000	20	30	48	29	32	79	13,5	52,3
25	63	50 000	20	30	48	29	32	91	13,5	64,3
30	80	80 000	28	40	59	34	39	118	17,5	82,7
40	100	125 000	36	50	79	50	54	132	17,5	96,9
50	125	200 000	45	60	87	53	57	174	24	125,9
60	160	320 000	56	70	103	59	63	215	30	154,9
80	200	500 000	70	80	132	78	82	256	33	190,2

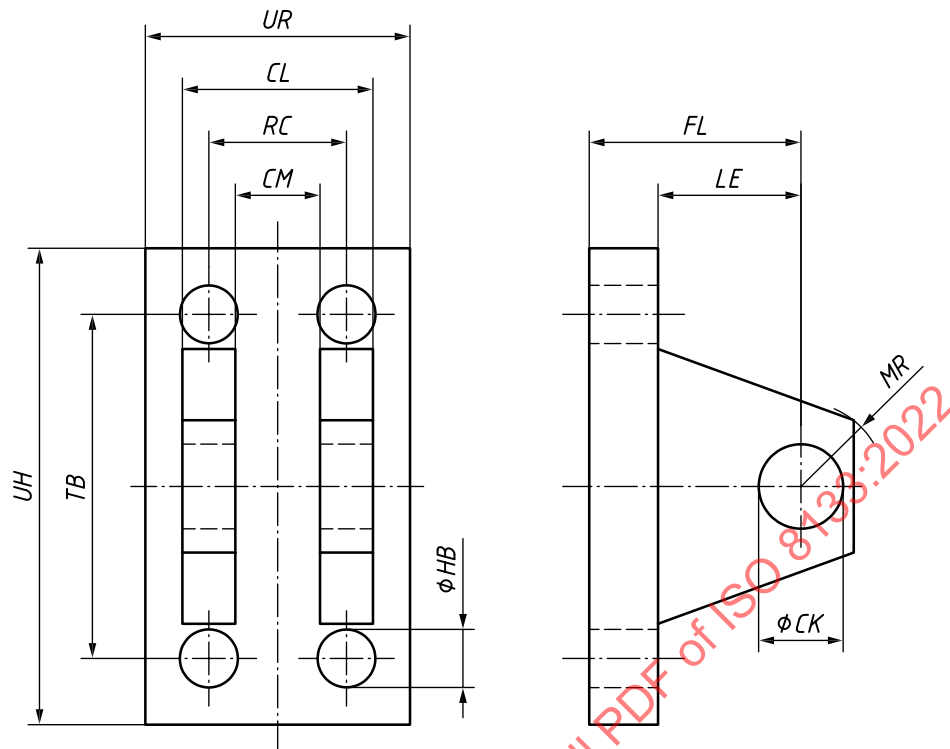


Figure 8 — AB4 — Clevis bracket, straight

Table 8 — Dimensions of AB4 — Clevis bracket, straight

Dimensions in millimetres

Type	Typical bore	Nominal force N	CK H9	UH max.	UR max.	CM A13	FL js13	MR max.	HB H13	LE min.	RC js13	TB js13	CL max.
10	25	8 000	10	60	35	12	23	12	5,5	13	18	47	26
12	32	12 500	12	70	45	16	29	17	6,6	19	24	57	34
16	40	20 000	14	86	55	20	29	17	9	19	30	68	42
20	50	32 000	20	129	80	30	48	29	13,5	32	45	102	62
25	63	50 000	20	129	80	30	48	29	13,5	32	45	102	62
30	80	80 000	28	170	100	40	59	34	17,5	39	60	135	83
40	100	125 000	36	202	130	50	79	50	17,5	54	75	167	103
50	125	200 000	45	251	150	60	87	53	24	57	90	203	123
60	160	320 000	56	302	180	70	103	59	30	63	105	242	143
80	200	500 000	70	366	200	80	132	78	33	82	120	300	163

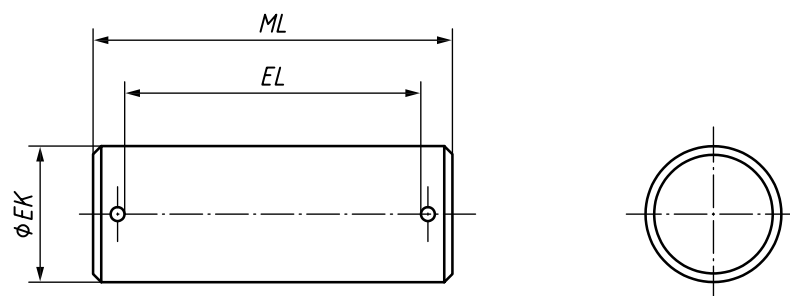


Figure 9 — AA4-S — Pivot pin, plain (split pin)