

ISO

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

ISO RECOMMENDATION

R 1722

ROCK DRILLING

EXTENSION DRILL STEEL EQUIPMENT
FOR PERCUSSIVE LONG-HOLE DRILLING

REVERSE-BUTTRESS-THREADED EQUIPMENTS

$1 \frac{1}{2}$ to $2 \frac{1}{2}$ in (38 to 64 mm)

1st EDITION

November 1970

COPYRIGHT RESERVED

The copyright of ISO Recommendations and ISO Standards belongs to ISO Member Bodies. Reproduction of these documents, in any country, may be authorized therefore only by the national standards organization of that country, being a member of ISO.

For each individual country the only valid standard is the national standard of that country.

Printed in Switzerland

Also issued in French and Russian. Copies to be obtained through the national standards organizations.

STANDARDSISO.COM : Click to view the full PDF of ISO/R 1722:1970

BRIEF HISTORY

The ISO Recommendation R 1722, *Rock drilling – Extension drill steel equipment for percussive long-hole drilling – Reverse-buttress-threaded equipments* $1\frac{1}{2}$ to $2\frac{1}{2}$ in (38 to 64 mm), was drawn up by Technical Committee ISO/TC 82, *Mining*, the Secretariat of which is held by the Deutscher Normenausschuss (DNA).

Work on this question led to the adoption of Draft ISO Recommendation No. 1722, which was circulated to all the ISO Member Bodies for enquiry in March 1969. It was approved, subject to a few modifications of an editorial nature, by the following Member Bodies :

Australia	India	South Africa, Rep. of
Belgium	Iran	Spain
Canada	Israel	Sweden
Czechoslovakia	Italy	Thailand
France	Japan	Turkey
Germany	Netherlands	U.A.R.
Greece	New Zealand	United Kingdom
Hungary	Poland	Yugoslavia

No Member Body opposed the approval of the Draft.

This Draft ISO Recommendation was then submitted by correspondence to the ISO Council, which decided to accept it as an ISO RECOMMENDATION.

STANDARDSISO.COM : Click to view the full PDF of ISO/R 1722:1970

ROCK DRILLING
EXTENSION DRILL STEEL EQUIPMENT
FOR PERCUSSIVE LONG-HOLE DRILLING
REVERSE-BUTTRESS-THREADED EQUIPMENTS
 $1 \frac{1}{2}$ to $2 \frac{1}{2}$ in (38 to 64 mm)

1. SCOPE

This ISO Recommendation specifies the basic dimensions for reverse-buttress-threaded extension drill steel equipment for percussive long-hole drilling, of the following nominal sizes :

$1 \frac{1}{2}$ in light (38 mm)


$1 \frac{3}{4}$ in light (45 mm)

$2 \frac{1}{4}$ in light (52 mm)

$2 \frac{1}{2}$ in light (64 mm)

[illegible]

3. EXTENSION RODS

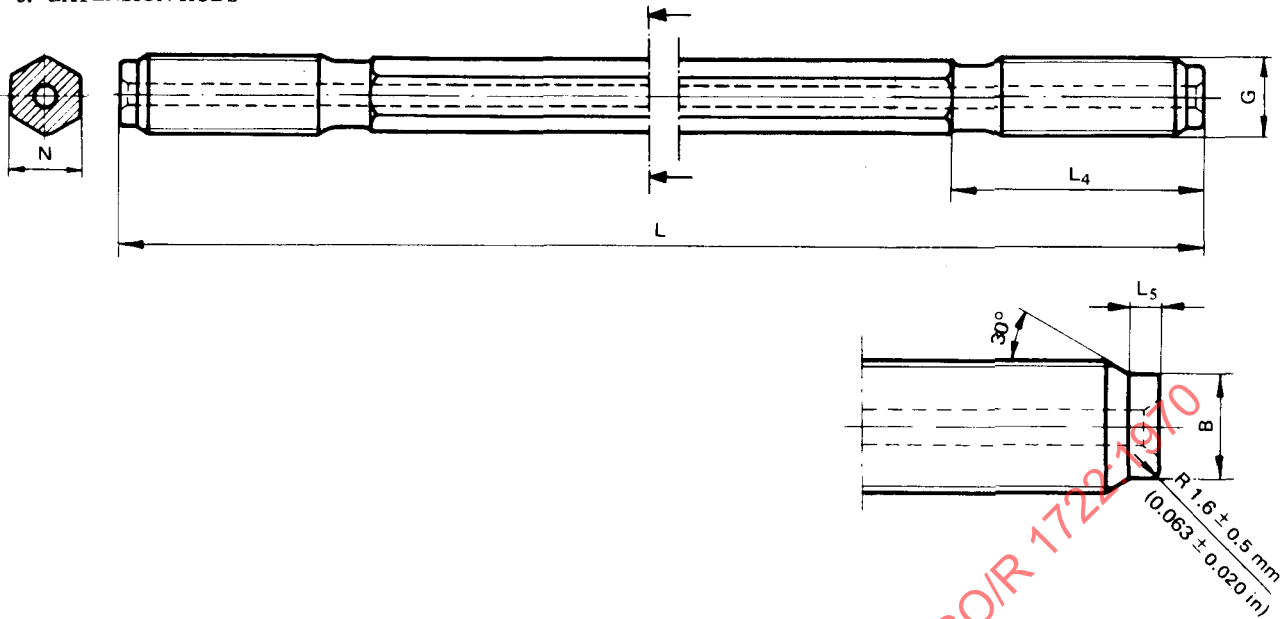

Dimensions in millimetres


Equipment	Hexagonal drill rod <i>N</i> nominal	Thread diameter <i>G</i> nominal	<i>L</i>		<i>L</i> ₄ * ±1	<i>B</i>		<i>L</i> ₅	
			Basic size	Tolerance		Basic size	Tolerance	Basic size	Tolerance
1 1/2 in light	32	1 1/2 in	3050 3660	± 25	123.8	31.50	0 -0.25	6.35	± 0.5
1 3/4 in light	38	1 3/4 in	3050 3660	± 25	133.4	37.85	0 -0.25	6.35	± 0.5
2 1/4 in light	45	2 1/4 in	3050 3660 6095	± 25	122.2*	51.10	0 -0.30	6.35	± 0.5
2 1/2 in light	48	2 1/2 in	3050 3660 6095	± 25	146.0*	53.90	0 -0.30	7.14	± 0.5

Dimensions in inches

Equipment	Hexagonal drill rod <i>N</i> nominal	Thread diameter <i>G</i> nominal	<i>L</i>		<i>L</i> ₄ * ± 0.039	<i>B</i>		<i>L</i> ₅	
			Basic size ft	Tolerance in		Basic size	Tolerance	Basic size	Tolerance
1 1/2 in light	1 1/4	1 1/2 in	10 12	± 1	4.875	1.240	0 -0.010	0.250	± 0.020
1 3/4 in light	1 1/2	1 3/4 in	10 12	± 1	5.250	1.490	0 -0.010	0.250	± 0.020
2 1/4 in light	1 3/4	2 1/4 in	10 12 20	± 1	4.813*	2.012	0 -0.012	0.250	± 0.020
2 1/2 in light	1 7/8	2 1/2 in	10 12 20	± 1	5.750*	2.122	0 -0.012	0.281	± 0.020

* No thread undercut is required in this instance.

4. COUPLING SLEEVES

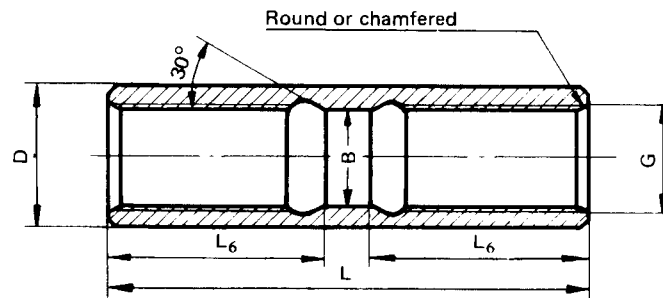



Dimensions in millimetres

Equipment	L_{-1}^0	D max.	Thread diameter G nominal	B		L_6	
				Basic size	Tolerance	Basic size	Tolerance
1 $\frac{1}{2}$ in light	203	54.4	1 $\frac{1}{2}$ in	31.75	$+0.5_0$	96.3	$+1_0$
1 $\frac{3}{4}$ in light	222	64.0	1 $\frac{3}{4}$ in	38.10	$+0.5_0$	105.0	$+1_0$
2 $\frac{1}{4}$ in light	254	80.0	2 $\frac{1}{4}$ in	51.36	$+0.5_0$	120.9	$+1_0$
2 $\frac{1}{2}$ in light	305	85.3	2 $\frac{1}{2}$ in	54.10	$+0.5_0$	147.1	$+1_0$

Dimensions in inches

Equipment	$L_{-0.039}^0$	D max.	Thread diameter G nominal	B		L_6	
				Basic size	Tolerance	Basic size	Tolerance
1 $\frac{1}{2}$ in light	8	2.14	1 $\frac{1}{2}$ in	1.250	$+0.020_0$	3.790	$+0.039_0$
1 $\frac{3}{4}$ in light	8.75	2.52	1 $\frac{3}{4}$ in	1.500	$+0.020_0$	4.134	$+0.039_0$
2 $\frac{1}{4}$ in light	10	3.14	2 $\frac{1}{4}$ in	2.022	$+0.020_0$	4.759	$+0.039_0$
2 $\frac{1}{2}$ in light	12	3.36	2 $\frac{1}{2}$ in	2.130	$+0.020_0$	5.790	$+0.039_0$

5. FOUR-WING BITS – X-DESIGN

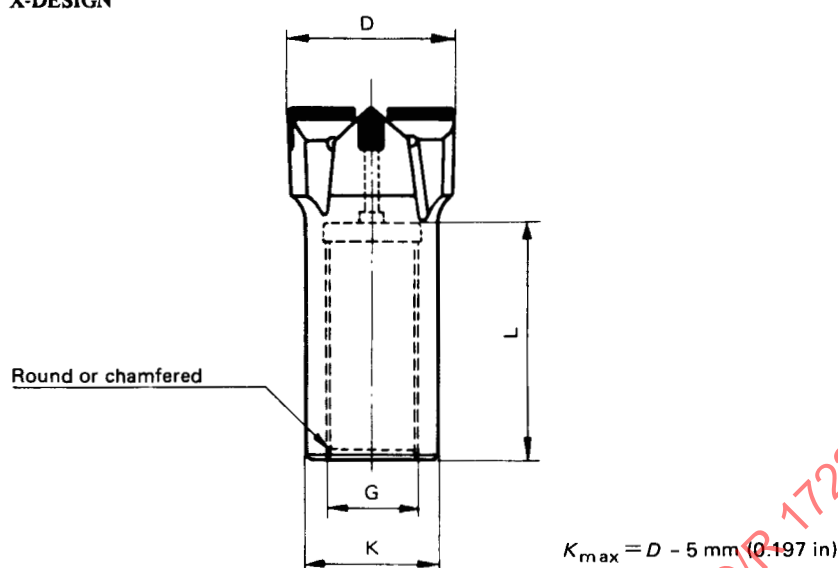

X-design

Equipment	Nominal diameter		D				Thread diameter	L max.	
			Basic size		Tolerance		G nominal		
	mm	in	mm	in	mm	in	in	mm	in
1 1/2 in light	64	2 1/2	63.50	2.500	+ 0.6	+ 0.024	1 1/2	82.5	3.25
	70	2 3/4	69.85	2.750					
	76	3	76.20	3.000					
	89	3 1/2	88.90	3.500					
1 3/4 in light	76	3	76.20	3.000	+ 0.6	+ 0.024	1 3/4	82.5	3.25
	89	3 1/2	88.90	3.500	+ 0.6	+ 0.024		82.5	3.25
	102	4	101.60	4.000	+ 1.0	+ 0.039		108.0	4.25
2 1/4 in light	89	3 1/2	88.90	3.500	+ 0.6	+ 0.024	2 1/4	108.0	4.25
	102	4	101.60	4.000	+ 1.0	+ 0.039			
	115	4 1/2	114.30	4.500	+ 1.0	+ 0.039			
2 1/2 in light	102	4	101.60	4.000	+ 1.0	+ 0.039	2 1/2	108.0	4.25
	115	4 1/2	114.30	4.500					
	127	5	127.00	5.000					