

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

SAE AS1712

RATIONALE

AS1712C HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

FEDERAL SUPPLY CLASS
4730


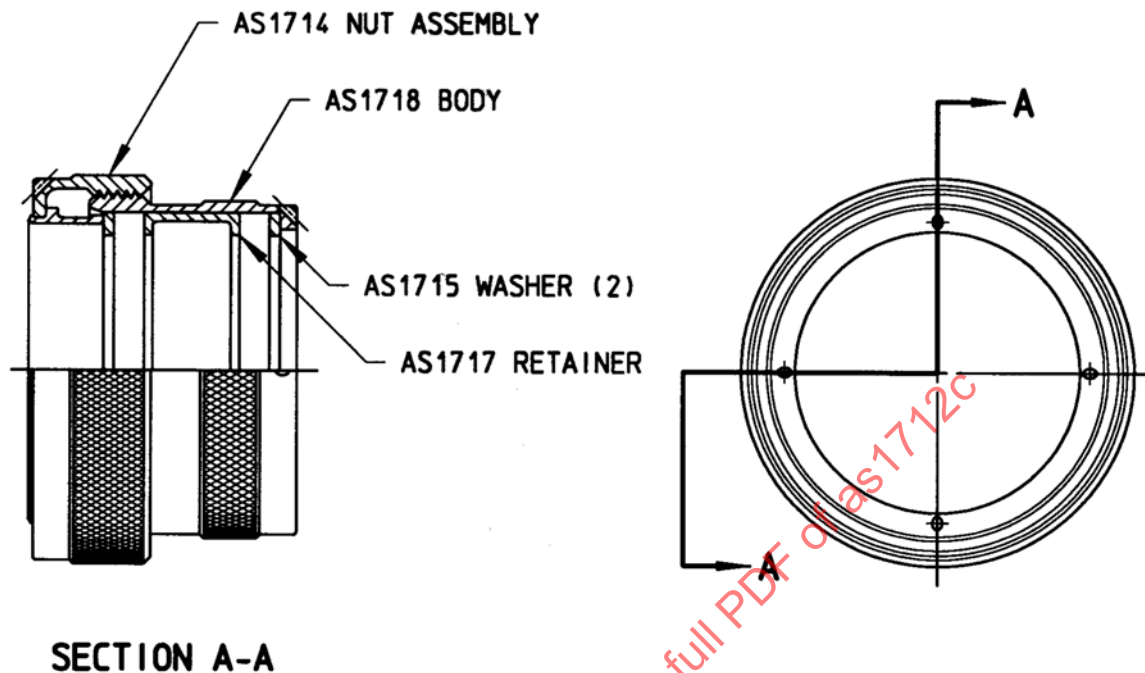


FIGURE 1 - COUPLING SUBASSEMBLY, FLEXIBLE

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1712C>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /2/ AS1710

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

COUPLING SUBASSEMBLY, FLEXIBLE,
VARIABLE CAVITY, THREADED,
FERRULE TYPE TUBE ENDS

SAE AS1712
SHEET 1 OF 3

REV.
C

Copyright 2013 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1982-05 REVISED 2006-08 REAFFIRMED 2013-01

TABLE 1 - COUPLING SUBASSEMBLY WEIGHTS

AS1712 DASH NO.	TUBE SIZE (REF)	O-RING DASH NO. (REF) /1/	SUBASSEMBLY WEIGHT LB/EA APPROX. REF.
-08	.500	114	.043
-10	.625	116	.050
-12	.750	212	.067
-16	1.000	216	.084
-20	1.250	220	.098
-24	1.500	326	.139
-28	1.750	328	.156
-32	2.000	330	.227
-36	2.250	332	.249
-40	2.500	334	.239
-44	2.750	336	.259
-48	3.000	338	.280
-56	3.500	342	.333
-64	4.000	346	.374
-72	4.500	426	.524
-80	5.000	430	.700
-88	5.500	434	.704

NOTES:

- /1/ THE DASH NUMBERS LISTED IN THE TABULATION ARE STANDARD O-RING SIZES AS DEFINED BY AS568 AND ARE NOT A PART OF THIS ASSEMBLY.
- /2/ COUPLING SUBASSEMBLIES SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED AND ASSEMBLED BY AN ACCREDITED MANUFACTURER OR ASSEMBLED BY AN ACCREDITED DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST FOR PRI-QPL-AS1710 FOR THIS STANDARD. THE QPL IS AVAILABLE AT www.eauditnet.com.
3. RATED OPERATING CHARACTERISTICS: SEE AS1710.
4. MATERIALS AND FINISH: SEE INDIVIDUAL STANDARDS.
5. MARKING: EACH COUPLING SUBASSEMBLY SHALL BE MARKED PER AS478-30, .062 in OR LARGER CHARACTERS, WITH MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE, COMPLETE "AS" NUMBER, AND DATE OF MANUFACTURE IN QUARTERS (1Q91 – FIRST QUARTER OF 1991). SIZES -08, -10, AND -12 MAY BE MARKED PER AS478-35D WITH THIS INFORMATION.

 <i>An SAE International Group</i>	AEROSPACE STANDARD	SAE AS1712 SHEET 2 OF 3	REV. C
	COUPLING SUBASSEMBLY, FLEXIBLE, VARIABLE CAVITY, THREADED, FERRULE TYPE TUBE ENDS		