

REV.
A

AS3262

FEDERAL SUPPLY CLASS
5310

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

UPPER THREADED PORTION FORMED OUT OF ROUND
FOR THREAD LOCKING FEATURE. TOOL MARKS TO
BLEND SMOOTHLY WITHOUT ABRUPT CHANGE.

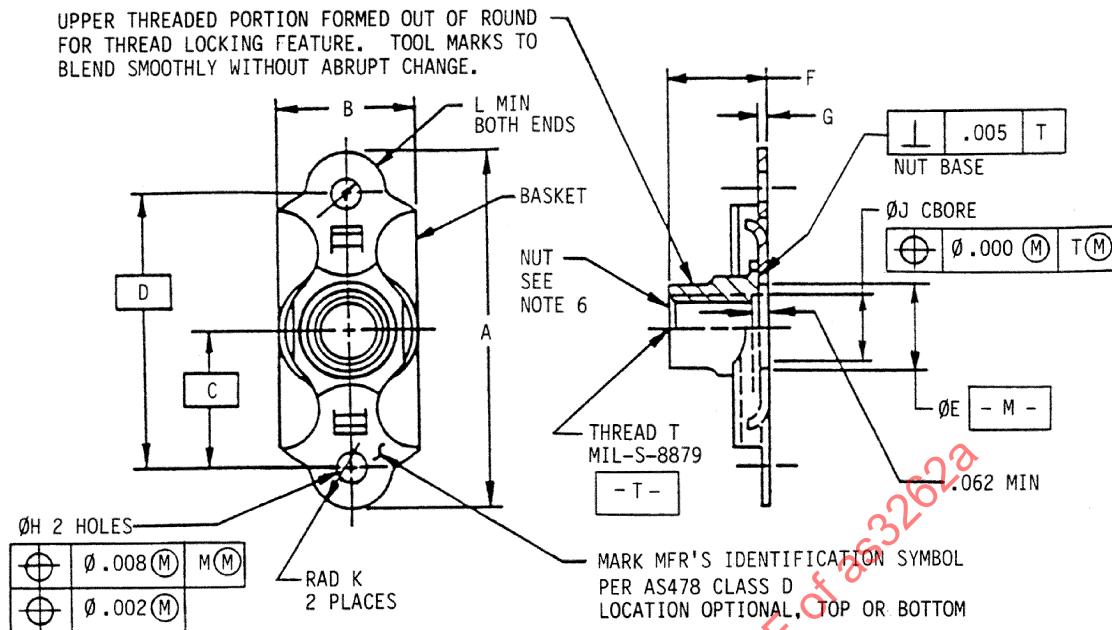



FIGURE 1

TABLE 1

PART NUMBER	THREAD T	A MAX	B MAX	C	D	E	F		G
							+0.000 -0.030		
AS3262-03	0.190 -32UNJF-3B	0.948	0.436	0.344	0.688	0.250 - 0.270	0.288	0.030 - 0.038	
AS3262-04	0.250 -28UNJF-3B	1.292	0.540	0.500	1.000	0.310 - 0.330	0.366	0.030 - 0.038	
AS3262-05	0.3125-24UNJF-3B	1.292	0.645	0.500	1.000	0.372 - 0.392	0.413	0.036 - 0.044	

PART NUMBER	H	J MIN	K	L	P LBF MIN	R LBF-IN. MIN	APPROX MASS LB/100
AS3262-03	0.098 - 0.103	0.194	0.115 - 0.125	0.053	200	90	0.54
AS3262-04	0.098 - 0.103	0.254	0.135 - 0.145	0.073	225	160	1.01
AS3262-05	0.130 - 0.135	0.317	0.135 - 0.145	0.057	250	280	1.77

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SOURCE CONTROL DRAWING

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

NUT, SELF-LOCKING, PLATE - 2 LUG,
FLOATING, CBORED, UNS S66286

AS3262
SHEET 1 OF 2

**REV.
A**

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1987-02 REVISED 1990-11 REAFFIRMED 2006-05