

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS5195

RATIONALE

FEDERAL SUPPLY CLASS
4730

AS5195C HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

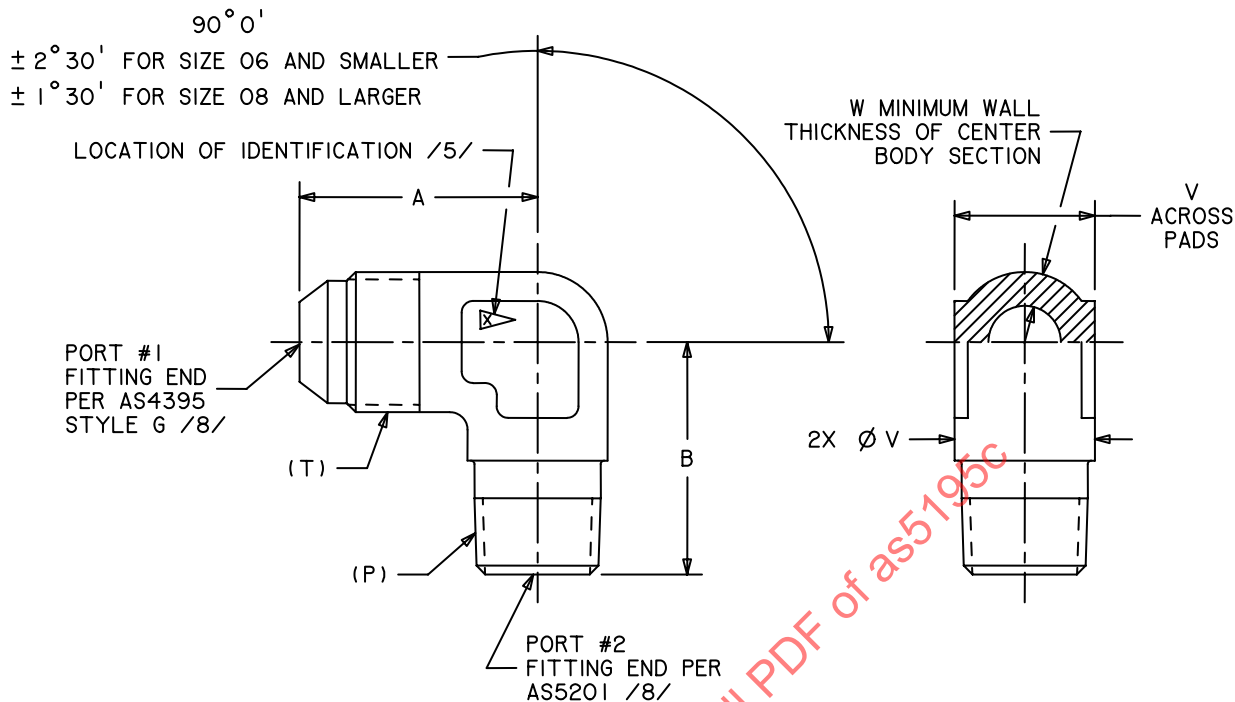



FIGURE 1 - FITTING, ELBOW, 90°

TABLE 1 - DIMENSIONS

BASIC NO. AS5195 /17/ SIZE CODE	(NOMINAL TUBE SIZE) PORT #1	(NOMINAL PIPE SIZE) PORT #2	P THREAD PER AS71051 ANPT	T THREAD PER AS8879 CLASS 3A	PORT #2 STYLE	A	B
0202	.125	.125	1/8-27	.3125-24 UNJF	B	.790	.743
0302	.188	.125	1/8-27	.3750-24 UNJF	B	.852	.743
0402	.250	.125	1/8-27	.4375-20 UNJF	C	.915	.805
0404	.250	.250	1/4-18	.4375-20 UNJF	A	1.055	1.086
0502	.312	.125	1/8-27	.5000-20 UNJF	C	.977	.805
0504	.312	.250	1/4-18	.5000-20 UNJF	A	1.055	1.086
0602	.375	.125	1/8-27	.5625-18 UNJF	C	1.055	.899
0604	.375	.250	1/4-18	.5625-18 UNJF	A	1.086	1.118
0606	.375	.375	3/8-18	.5625-18 UNJF	C	1.212	1.212
0608	.375	.500	1/2-14	.5625-18 UNJF	C	1.336	1.462
0806	.500	.375	3/8-18	.7500-16 UNJF	C	1.274	1.243
1008	.625	.500	1/2-14	.8750-14 UNJF	C	1.477	1.493

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS5195C>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS4842/1



AEROSPACE STANDARD

FITTING, ELBOW, 90°,
FLARED TO PIPE

AS5195
SHEET 1 OF 5

REV.
C

TABLE 1A – DIMENSIONS AND WEIGHTS

BASIC NO. AS5195 /17/ SIZE CODE	V	W	LB/EA APPROX REF AL	LB/EA APPROX REF CU	LB/EA APPROX REF STEEL
0202	.297-.314	.090	.0122	.0370	.0349
0302	.360-.377	.100	.0177	.0537	.0507
0402	.423-.440	.110	.0251	.0762	.0720
0404	.547-.565	.120	.0485	.147	.139
0502	.485-.502	.120	.0334	.101	.0958
0504	.547-.565	.120	.0476	.145	.137
0602	.547-.565	.120	.0454	.138	.130
0604	.547-.565	.120	.0473	.144	.136
0606	.735-.753	.150	.0953	.290	.274
0608	.860-.878	.170	.149	.452	.427
0806	.735-.753	.150	.0971	.295	.279
1008	.860-.878	.170	.146	.443	.419

TABLE 1B – DIMENSIONS

BASIC NO. AS5195 /17/ SIZE CODE	(NOMINAL TUBE SIZE) PORT #1	(NOMINAL PIPE SIZE) PORT #2	P THREAD PER AS71051 ANPT	T THREAD PER AS8879 CLASS 3A	PORT #2 STYLE	A	B
1012	.625	.750	3/4-14	.8750-14 UNJF	A	1.649	1.586
1208	.750	.500	1/2-14	1.0625-12 UNJ	C	1.649	1.586
1212	.750	.750	3/4-14	1.0625-12 UNJ	A	1.680	1.618
1216	.750	1.000	1-11 1/2	1.0625-12 UNJ	A	1.805	1.962
1612	1.000	.750	3/4-14	1.3125-12 UNJ	C	1.836	1.743
1616	1.000	1.000	1-11 1/2	1.3125-12 UNJ	A	1.836	1.993
2016	1.250	1.000	1-11 1/2	1.6250-12 UNJ	C	2.055	2.399
2020	1.250	1.250	1 1/4-11 1/2	1.6250-12 UNJ	B	2.086	2.399
2420	1.500	1.250	1 1/4-11 1/2	1.8750-12 UNJ	C	2.227	2.524
2824	1.750	1.500	1 1/2-11 1/2	2.2500-12 UNJ	C	2.836	2.805
3232	2.000	2.000	2-11 1/2	2.5000-12 UNJ	C	3.086	3.024



AEROSPACE STANDARD

FITTING, ELBOW, 90°,
FLARED TO PIPEAS5195
SHEET 2 OF 5REV.
C

TABLE 1C – DIMENSIONS AND WEIGHTS

BASIC NO. AS5195 /17/ SIZE CODE	V	W	LB/EA APPROX REF AL	LB/EA APPROX REF CU	LB/EA APPROX REF STEEL
1012	1.047-1.065	.185	.237	.721	.681
1208	1.047-1.065	.185	.245	.745	.704
1212	1.047-1.065	.185	.230	.698	.659
1216	1.292-1.317	.205	.407	1.24	1.17
1612	1.292-1.317	.205	.395	1.20	1.13
1616	1.292-1.317	.205	.369	1.12	1.06
2016	1.605-1.630	.240	.728	2.21	2.09
2020	1.605-1.630	.240	.622	1.89	1.79
2420	1.855-1.880	.250	.944	2.87	2.71
2824	2.230-2.260	.350	1.63	4.96	4.69
3232	2.542-2.572	.350	2.36	7.17	6.77

NOTES:

/1/ MATERIAL:

- DASH AS CODE LETTER – LOW ALLOY STEEL FORGING OR BAR, TYPE 4130 PER AMS-S-6758 OR AMS 6370, OR TYPE 4140 PER AMS 6382. /2/
- CODE LETTER B – TYPE 377 COPPER ALLOY FORGING PER ASTM B 124 OR AMS 4614, OR HALF HARD FORGING OR BAR PER ASTM B 138.
- CODE LETTER D – TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS 4133, OR TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6, OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR AMS 4339. /2/ /18/
- CODE LETTER J – TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5639.
- CODE LETTER K – TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5648.
- CODE LETTER R – TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS-QQ-S-763 OR AMS 5645.
- CODE LETTER W – TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS 4141, OR TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9, OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124. /2/

/2/ HEAT TREATMENT:

- DASH AS CODE LETTER – SEE HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- MATERIAL CODE LETTERS D AND W – SEE ELECTRICAL CONDUCTIVITY AND HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- OTHER MATERIAL CODE LETTERS - NONE.

	AEROSPACE STANDARD		AS5195 SHEET 3 OF 5	REV. C
	FITTING, ELBOW, 90°, FLARED TO PIPE			

3. FINISH:

- a. DASH AS CODE LETTER – CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2, DYE BLACK AND COAT WITH A LIGHT FILM OF OIL PER PROCUREMENT SPECIFICATION. /16/
- b. MATERIAL CODE LETTER B – CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 3 OR NONE. /16/
- c. MATERIAL CODE LETTER D – ANODIZE PER AMS 2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BLUE, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.
- d. MATERIAL CODE LETTER J – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- e. MATERIAL CODE LETTER K – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- f. MATERIAL CODE LETTER R – PASSIVATE PER AMS-QQ-P-35, TYPE VI OR VII.
- g. MATERIAL CODE LETTER W:
 1. ANODIZE PER AMS 2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE BROWN, DUPLEX SEAL PER PROCUREMENT SPECIFICATION.
 2. W CODE PARTS TO BE COATED WITH HIGH PURITY ALUMINUM ONLY WILL HAVE THE FINISH CODE LETTER "V" AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE COAT: WITH HIGH PURITY ALUMINUM PER MIL-DTL-83488, CLASS 3, TYPE II WITH MAXIMUM COATING THICKNESS OF .0005. GLASS BEAD PEEN PRESSURE SHALL BE 25 psi MAXIMUM.

/4/ PROCUREMENT SPECIFICATION: AS4842/1 EXCEPT AS SPECIFIED ON THIS STANDARD. USERS OF THIS STANDARD SHALL PROCURE THIS PRODUCT FROM ACCREDITED MANUFACTURER(S), OR ACCREDITED DISTRIBUTOR(S), AS LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED MANUFACTURERS LIST (QML) FOR THIS TYPE OF PRODUCT.

/5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D, OR METHOD 7A3, 15A3, OR 15B.

- a. FOR SIZES 06 AND SMALLER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS" AND MATERIAL CODE LETTER.
- b. FOR SIZES 08 AND LARGER: MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER AND MATERIAL CODE LETTER.

6. INTENDED USE: THIS PART IS DESIGNED FOR USE IN SYSTEMS WITH MAXIMUM OPERATING PRESSURES AS FOLLOWS:

- a. SIZES 02 THROUGH 12 IN ALUMINUM ALLOY AND COPPER ALLOY AND SIZES 02 THROUGH 16 IN STEEL AND CORROSION RESISTANT STEEL AT 8000 psi.
- b. SIZES 16 THROUGH 32 IN ALUMINUM ALLOY AND COPPER ALLOY AND SIZES 20 THROUGH 32 IN STEEL AND CORROSION RESISTANT STEEL AT 1500 psi.

7. THIS STANDARD IS A FUNCTIONAL EQUIVALENT OF MS20822 AND IS INTENDED TO BE SUITABLE AS A REPLACEMENT STANDARD.

/8/ AT THE OPTION OF THE MANUFACTURER, THE SMALLEST ID OF EITHER THE AS4395 OR AS5201 FITTING ENDS FOR A GIVEN PART NUMBER MAY BE MACHINED INTO THE OTHER FITTING ENDS FOR THAT PART NUMBER.

9. WHEN MACHINED FROM BAR OR OVERSIZED FORGING, THE CENTER BODY DIMENSIONS SHALL CONFORM TO AS1376, TABLE 1.

10. THE CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT.

11. INTERPRETATION OF DRAWING PER ARP4296.

12. SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M; REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, MACHINED SURFACES TO BE 125 µin Ra. FORGED SURFACES MAY BE 250 µin Ra.

13. BREAK EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.

	AEROSPACE STANDARD	AS5195 SHEET 4 OF 5	REV. C
	FITTING, ELBOW, 90°, FLARED TO PIPE		