

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS85049/4


FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISION IS REQUIRED TO CORRECT THE MINIMUM CABLE RANGE DIMENSION FOR SIZE # 13 IN TABLE 2, PAGE 5, IT IS INCORRECTLY LISTED AS 2.200 (55.88) AND SHOULD BE 2.000 (50.80).

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS85049.

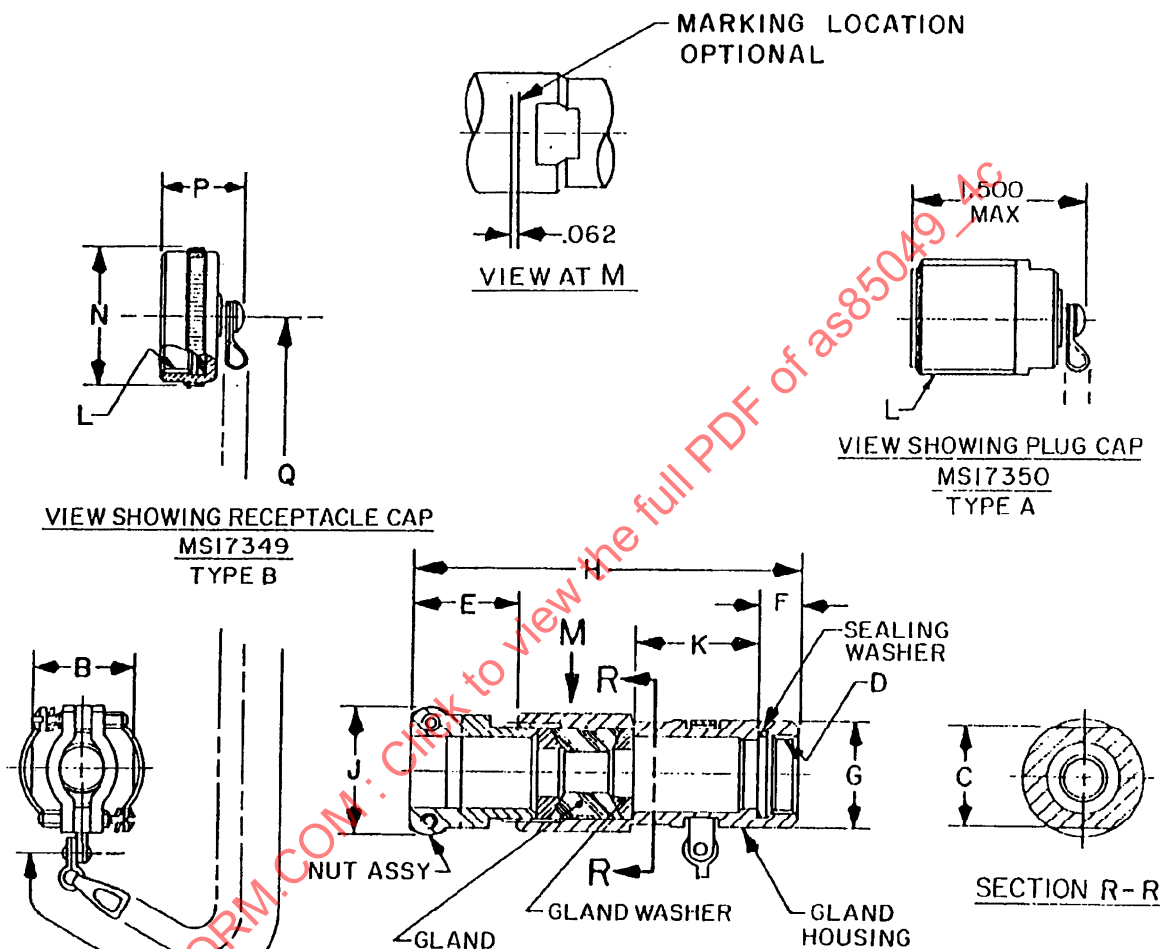


CONFIGURATION A - STYLE 1 CABLE SEALING

FIGURE 1A - CONFIGURATIONS AND DIMENSIONS

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS85049/4C>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS85049



AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
CABLE SEALING, STRAIGHT, SET-UP, CATEGORY 1A
(FOR MIL-DTL-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/4
SHEET 1 OF 11

REV.
C

CONFIGURATION A - STYLE 1 CABLE SEALING (CONTINUED)

TABLE 1 - FIGURE 1A CONFIGURATIONS AND DIMENSIONS

SIZE NO.	SHELL SIZE	CABLE RANGE (SEE NOTE 5)		B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LENGTH MAX	F +.016	G DIA +.010 -.020
		MAX	MIN						
1	12	.530 (13.46)	.436 (11.07)	1.000 (25.40)	.812 (20.62)	.750-20 UNEF	1.062 (26.97)	.479 (12.17)	.938 (23.83)
2	12	.500 (12.70)	.406 (10.31)	.875 (22.23)	.938 (23.83)	.750-20 UNEF	.969 (24.61)	.479 (12.17)	.938 (23.83)
3	12	.405 (10.29)	.311 (7.90)	1.000 (25.40)	.812 (20.62)	.750-20 UNEF	1.062 (26.97)	.479 (12.17)	.938 (23.83)
4	14	.605 (15.37)	.511 (12.98)	1.000 (25.40)	1.062 (26.97)	.875-20 UNEF	1.062 (26.97)	.479 (12.17)	1.062 (26.97)
5	14	.625 (15.88)	.531 (13.49)	1.062 (26.97)	1.125 (28.58)	.875-20 UNEF	1.062 (26.97)	.479 (12.17)	1.062 (26.97)
6	14	.530 (13.46)	.436 (11.07)	1.000 (25.40)	1.062 (26.97)	.875-20 UNEF	1.062 (26.97)	.479 (12.17)	1.062 (26.97)
7	14	.405 (10.29)	.311 (7.90)	1.000 (25.40)	1.062 (26.97)	.875-20 UNEF	1.062 (26.97)	.479 (12.17)	1.062 (26.97)
8	18	.828 (21.03)	.715 (18.16)	1.188 (30.18)	1.250 (31.75)	1.125-18 UNEF	1.094 (27.79)	.479 (12.17)	1.312 (33.32)
9	20	.750 (19.05)	.637 (16.18)	1.312 (33.32)	1.375 (34.93)	1.250-18 UNEF	1.094 (27.79)	.479 (12.17)	1.438 (36.53)
10	20	1.000 (25.40)	.875 (22.23)	1.546 (39.27)	1.375 (34.93)	1.250-18 UNEF	1.281 (32.54)	.479 (12.17)	1.438 (36.53)
11	20	.900 (22.86)	.787 (19.99)	1.312 (33.32)	1.375 (34.93)	1.250-18 UNEF	1.094 (27.79)	.479 (12.17)	1.438 (36.53)
12	20	1.055 (26.80)	.930 (23.62)	1.546 (39.27)	1.375 (34.93)	1.250-18 UNEF	1.281 (32.54)	.479 (12.17)	1.438 (36.53)
13	22	1.000 (25.40)	.875 (22.23)	1.546 (39.27)	1.625 (41.28)	1.375-18 UNEF	1.281 (32.54)	.479 (12.17)	1.562 (39.67)
14	22	1.109 (28.17)	.984 (24.99)	1.546 (39.27)	1.625 (41.28)	1.375-18 UNEF	1.281 (32.54)	.479 (12.17)	1.562 (39.67)

CONFIGURATION A - STYLE 1 CABLE SEALING (CONTINUED)

TABLE 1 - FIGURE 1A CONFIGURATIONS AND DIMENSIONS (CONTINUED)

SIZE NO.	SHELL SIZE	H MAX	J ±.031	K +.015 -.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	4.275 (108.59)	1.375 (34.93)	1.219 (30.96)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)
2	12	3.678 (93.42)	1.125 (28.58)	.871 (22.12)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)
3	12	4.275 (108.59)	1.375 (34.93)	1.219 (30.96)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)
4	14	4.177 (106.10)	1.375 (34.93)	1.121 (28.47)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
5	14	4.489 (114.02)	1.562 (39.67)	1.371 (34.82)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
6	14	4.177 (106.10)	1.375 (34.93)	1.121 (28.47)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
7	14	4.177 (106.10)	1.375 (34.93)	1.121 (28.47)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
8	18	4.584 (116.43)	1.688 (42.88)	1.343 (34.11)	1.250-0.1P-0.2L-DS	1.469 (37.31)	.980 (24.89)	5.00 (127.00)
9	20	4.647 (118.03)	1.812 (46.02)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
10	20	4.896 (124.36)	2.125 (53.98)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
11	20	4.647 (118.03)	1.812 (46.02)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
12	20	4.896 (124.36)	2.125 (53.98)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
13	22	4.896 (124.36)	2.125 (53.98)	1.371 (34.82)	1.500-0.1P-0.2L-DS	1.688 (42.88)	.980 (24.89)	6.00 (152.40)
14	22	4.896 (124.36)	2.125 (53.98)	1.371 (34.82)	1.500-0.1P-0.2L-DS	1.688 (42.88)	.980 (24.89)	6.00 (152.40)



AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
CABLE SEALING, STRAIGHT, SET-UP, CATEGORY 1A
(FOR MIL-DTL-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/4
SHEET 2 OF 11

**REV.
C**

CONFIGURATION A - STYLE 1 CABLE SEALING (CONTINUED)

TABLE 1 - FIGURE 1A CONFIGURATIONS AND DIMENSIONS (CONTINUED)

SIZE NO.	SHELL SIZE	CABLE RANGE (SEE NOTE 5)		B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LENGTH MAX	F +.016	G DIA +.010 -.020
		MAX	MIN						
15	24	1.180 (29.97)	1.055 (26.80)	1.780 (45.21)	1.875 (47.63)	1.625-18 UNEF	1.281 (32.54)	.479 (12.17)	1.812 (46.02)
16	24	1.310 (33.27)	1.185 (30.10)	1.780 (45.21)	1.875 (47.63)	1.625-18 UNEF	1.281 (32.54)	.479 (12.17)	1.812 (46.02)
17	24	1.230 (31.24)	1.105 (28.07)	1.780 (45.21)	1.875 (47.63)	1.625-18 UNEF	1.281 (32.54)	.479 (12.17)	1.812 (46.02)
18	24	1.375 (34.93)	1.250 (31.75)	2.000 (50.80)	1.875 (47.63)	1.625-18 UNEF	1.281 (32.54)	.479 (12.17)	1.812 (46.02)
19	28	1.445 (36.70)	1.320 (33.53)	2.000 (50.80)	2.062 (52.37)	1.875-16 UN	1.281 (32.54)	.479 (12.17)	2.062 (52.37)
20	28	1.531 (38.89)	1.406 (35.71)	2.000 (50.80)	2.062 (52.37)	1.875-16 UN	1.281 (32.54)	.479 (12.17)	2.062 (52.37)
21	28	1.375 (34.93)	1.250 (31.75)	2.000 (50.80)	2.062 (52.37)	1.875-16 UN	1.281 (32.54)	.479 (12.17)	2.062 (52.37)
22	32	1.656 (42.06)	1.531 (38.89)	2.250 (57.15)	2.312 (58.72)	2.062-16 UNS	1.281 (32.54)	.479 (12.17)	2.312 (58.72)
23	32	1.828 (46.43)	1.700 (43.18)	2.438 (61.93)	2.312 (58.72)	2.062-16 UNS	1.391 (35.33)	.479 (12.17)	2.312 (58.72)
24	32	1.562 (39.67)	1.437 (36.50)	2.250 (57.15)	2.312 (58.72)	2.062-16 UNS	1.281 (32.54)	.479 (12.17)	2.312 (58.72)
25	32	1.730 (43.94)	1.605 (40.77)	2.438 (61.93)	2.312 (58.72)	2.062-16 UNS	1.391 (35.33)	.479 (12.17)	2.312 (58.72)
26	36	1.900 (48.26)	1.775 (45.09)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	1.391 (35.33)	.479 (12.17)	2.562 (65.07)
27	36	1.730 (43.94)	1.605 (40.77)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	1.391 (35.33)	.479 (12.17)	2.562 (65.07)
28	36	1.825 (46.36)	1.700 (43.18)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	1.391 (35.33)	.479 (12.17)	2.562 (65.07)
29	36	1.984 (50.39)	1.859 (47.22)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	1.391 (35.33)	.479 (12.17)	2.562 (65.07)
30	36	2.062 (52.37)	1.917 (48.69)	2.750 (69.85)	2.500 (63.50)	2.312-16 UNS	1.391 (35.33)	.479 (12.17)	2.562 (65.07)
31	40	2.375 (60.33)	2.230 (56.64)	3.000 (76.20)	2.812 (71.42)	2.625-16 UN	1.391 (35.33)	.667 (16.94)	2.875 (73.03)
32	40	2.250 (57.15)	2.105 (53.47)	2.875 (73.03)	2.625 (66.68)	2.625-16 UN	1.391 (35.33)	.667 (16.94)	2.875 (73.03)
33	40	2.145 (54.48)	2.000 (50.80)	2.750 (69.85)	2.625 (66.68)	2.625-16 UN	1.391 (35.33)	.667 (16.94)	2.875 (73.03)
34	40	2.062 (52.37)	1.917 (48.69)	2.750 (69.85)	2.625 (66.68)	2.625-16 UN	1.391 (35.33)	.667 (16.94)	2.875 (73.03)
35	44	2.328 (59.13)	2.183 (55.45)	2.875 (73.03)	2.750 (69.85)	2.875-16 UN	1.382 (35.10)	.667 (16.94)	3.125 (79.38)

CONFIGURATION A - STYLE 1 CABLE SEALING (CONTINUED)

TABLE 1 - FIGURE 1A CONFIGURATIONS AND DIMENSIONS (CONTINUED)

SIZE NO.	SHELL SIZE	H MAX	J ±.031	K +.015 -.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
15	24	4.959 (125.96)	2.469 (62.71)	1.372 (34.85)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
16	24	4.959 (125.96)	2.469 (62.71)	1.372 (34.85)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
17	24	4.959 (125.96)	2.469 (62.71)	1.372 (34.85)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
18	24	4.959 (125.96)	2.625 (66.68)	1.309 (33.25)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
19	28	5.021 (127.53)	2.625 (66.68)	1.371 (34.82)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)
20	28	5.021 (127.53)	2.625 (66.68)	1.371 (34.82)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)
21	28	5.021 (127.53)	2.625 (66.68)	1.371 (34.82)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)
22	32	5.083 (129.11)	2.953 (75.01)	1.370 (34.80)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
23	32	5.385 (136.78)	3.171 (80.54)	1.375 (34.93)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
24	32	5.083 (129.11)	2.953 (75.01)	1.370 (34.80)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
25	32	5.385 (136.78)	3.171 (80.54)	1.375 (34.93)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
26	36	5.354 (135.99)	3.171 (80.54)	1.344 (34.14)	2.250-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
27	36	5.354 (135.99)	3.171 (80.54)	1.344 (34.14)	2.250-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
28	36	5.354 (135.99)	3.171 (80.54)	1.344 (34.14)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
29	36	5.354 (135.99)	3.171 (80.54)	1.344 (34.14)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
30	36	5.385 (136.78)	3.375 (85.73)	1.375 (34.93)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
31	40	5.682 (144.32)	3.625 (92.08)	1.421 (36.09)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
32	40	5.682 (144.32)	3.500 (88.90)	1.421 (36.09)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
33	40	5.620 (142.75)	3.375 (85.73)	1.422 (36.12)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
34	40	5.620 (142.75)	3.375 (85.73)	1.422 (36.12)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
35	44	6.471 (164.36)	3.531 (89.69)	2.218 (56.34)	3.000-0.1P-0.2L-DS	3.217 (81.71)	.980 (24.89)	6.00 (152.40)








AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
CABLE SEALING, STRAIGHT, SET-UP, CATEGORY 1A
(FOR MIL-DTL-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/4
SHEET 3 OF 11

REV.
C

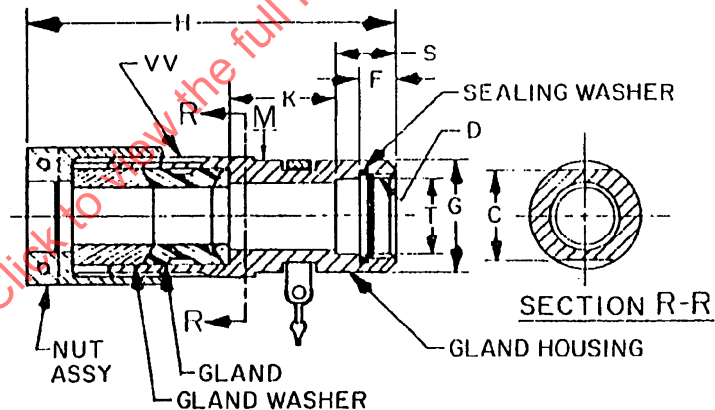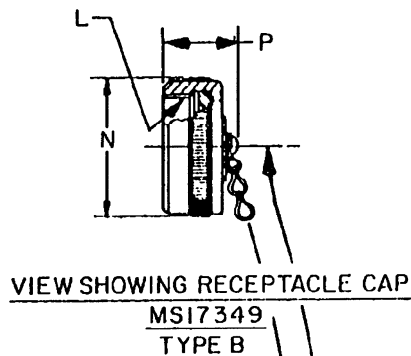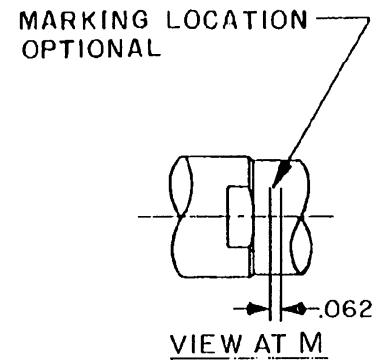

CONFIGURATION B - STYLE 2 CABLE SEALING

FIGURE 1B - CONFIGURATIONS AND DIMENSIONS

CONFIGURATION B - STYLE 2 CABLE SEALING (CONTINUED)

TABLE 2 - FIGURE 1B CONFIGURATIONS AND DIMENSIONS

SIZE NO.	SHELL SIZE	CABLE RANGE (SEE NOTE 5)		B ± .005	C +.000 -.010	D THREAD CLASS 2B-LH	F +.016	G DIA +.010 -.020	H MAX	J MAX
		MAX	MIN							
1	12	.521 (13.23)	.321 (8.15)	1.219 (30.96)	.938 (23.83)	.750-20 UNEF	.479 (12.17)	.938 (23.83)	4.000 (101.60)	1.320 (33.53)
2	14	.646 (16.41)	.446 (11.33)	1.344 (34.14)	1.062 (26.97)	.875-20 UNEF	.479 (12.17)	1.062 (26.97)	4.100 (104.14)	1.420 (36.07)
3	16	.765 (19.43)	.565 (14.35)	1.469 (37.31)	1.188 (30.18)	1.000-20 UNEF	.479 (12.17)	1.188 (30.18)	4.800 (121.92)	1.600 (40.64)
4	18	.890 (22.61)	.690 (17.53)	1.625 (41.28)	1.312 (33.32)	1.125-18 UNEF	.479 (12.17)	1.312 (33.32)	4.900 (124.46)	1.750 (44.45)
5	20	1.015 (25.78)	.815 (20.70)	1.750 (44.45)	1.438 (36.53)	1.250-18 UNEF	.479 (12.17)	1.438 (36.53)	4.900 (124.46)	1.900 (48.26)
6	22	1.180 (29.97)	.980 (24.89)	2.000 (50.80)	1.562 (39.67)	1.375-18 UNEF	.479 (12.17)	1.562 (39.67)	4.900 (124.46)	2.190 (55.63)
7	24	1.430 (36.32)	1.230 (31.24)	2.250 (57.15)	1.812 (46.02)	1.625-18 UNEF	.479 (12.17)	1.812 (46.02)	5.000 (127.00)	2.475 (62.87)
8	24	1.230 (31.24)	1.030 (26.16)	2.250 (57.15)	1.812 (46.02)	1.625-18 UNEF	.479 (12.17)	1.812 (46.02)	5.000 (127.00)	2.475 (62.87)
9	28	1.670 (42.42)	1.430 (36.32)	2.500 (63.50)	2.062 (52.37)	1.875-18 UN	.479 (12.17)	2.062 (52.37)	5.300 (134.62)	2.715 (68.96)
10	32	1.860 (47.24)	1.660 (22.23)	2.750 (69.85)	2.312 (58.72)	2.062-16 UN	.479 (12.17)	2.312 (58.72)	5.600 (142.24)	2.900 (73.66)
11	36	2.110 (53.59)	1.860 (47.24)	3.062 (77.77)	2.562 (65.07)	2.312-16 UN	.479 (12.17)	2.562 (65.07)	5.725 (145.42)	3.250 (82.55)
12	40	2.400 (60.96)	2.200 (55.88)	3.437 (87.30)	2.875 (73.03)	2.625-16 UN	.667 (16.94)	2.875 (73.03)	5.725 (145.42)	3.625 (92.08)
13	40	2.200 (55.88)	2.000 (50.80)	3.437 (87.30)	2.875 (73.03)	2.625-16 UN	.667 (16.94)	2.875 (73.03)	5.725 (145.42)	3.625 (92.08)

CONFIGURATION B - STYLE 2 CABLE SEALING (CONTINUED)

TABLE 2 - FIGURE 1B CONFIGURATIONS AND DIMENSIONS (CONTINUED)

SIZE NO.	SHELL SIZE	K ± .010	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK	S ± .010	T DIA ± .005	W GLAND THREADS CLASS 2-LH
1	12	.950 (24.13)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)	1.425 (36.20)	.600 (15.24)	1.062-18 UNEF
2	14	1.075 (27.31)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)	1.425 (36.20)	.726 (18.44)	1.187-18 UNEF
3	16	1.200 (30.48)	1.125-0.1P-0.2L-DS	1.344 (34.14)	.980 (24.89)	5.00 (127.00)	1.605 (40.77)	.845 (21.46)	1.312-18 UNEF
4	18	1.325 (33.66)	1.250-0.1P-0.2L-DS	1.469 (37.31)	.980 (24.89)	5.00 (127.00)	1.605 (40.77)	.970 (24.64)	1.437-18 UNEF
5	20	1.325 (33.66)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)	1.605 (40.77)	1.095 (27.81)	1.562-18 UNEF
6	22	1.325 (33.66)	1.500-0.1P-0.2L-DS	1.688 (42.88)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	1.220 (30.99)	1.812-16 UN
7	24	1.450 (36.83)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	1.470 (37.34)	2.062-16 UN
8	24	1.450 (36.83)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	1.470 (37.34)	2.062-16 UN
9	28	1.700 (43.18)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	1.713 (43.51)	2.312-16 UN
10	32	1.950 (49.53)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	1.900 (48.26)	2.500-16 UN
11	36	1.950 (49.53)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	2.150 (54.61)	2.875-16 UN
12	40	1.950 (49.53)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	2.460 (62.48)	3.125-16 UN
13	40	1.950 (49.53)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)	1.605 (40.77)	2.460 (62.48)	3.125-16 UN







AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
CABLE SEALING, STRAIGHT, SET-UP, CATEGORY 1A
(FOR MIL-DTL-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/4
SHEET 5 OF 11

**REV.
C**

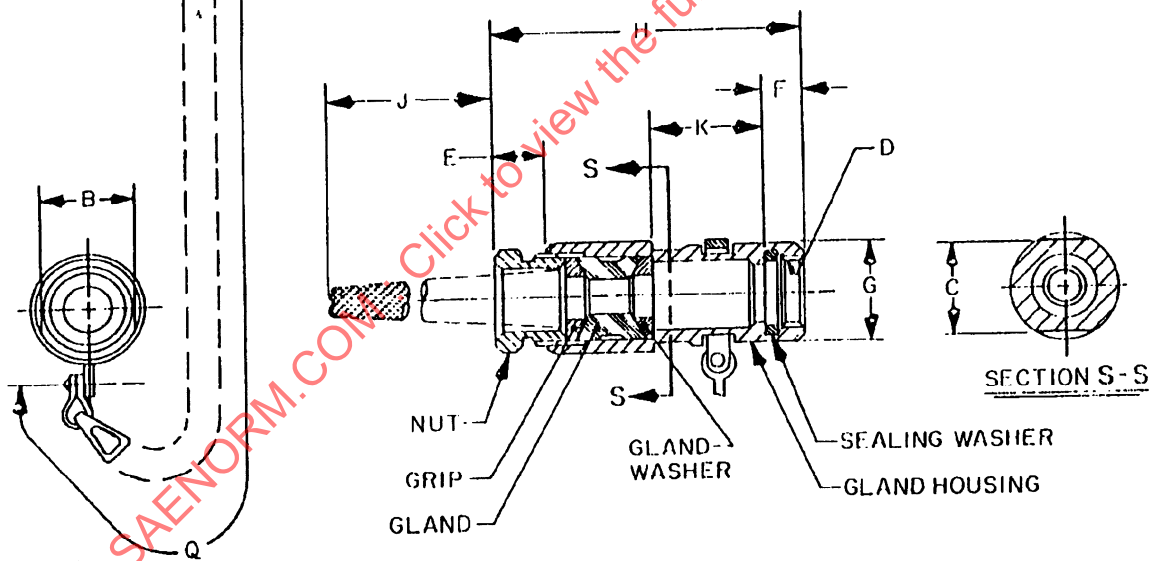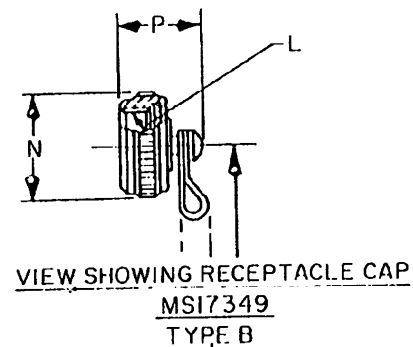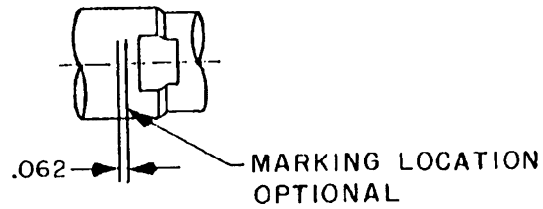

CONFIGURATION C - STYLE 3 CABLE SEALING AND GRIPPING

FIGURE 1C - CONFIGURATIONS AND DIMENSIONS

CONFIGURATION C - STYLE 3 CABLE SEALING (CONTINUED)

TABLE 3 - FIGURE 1C CONFIGURATIONS AND DIMENSIONS

SIZE NO.	SHELL SIZE	CABLE RANGE (SEE NOTE 5)		B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LENGTH MAX	F +.016	G DIA +.010 -.020
		MAX	MIN						
1	12	.530 (13.46)	.436 (11.07)	1.000 (25.40)	.812 (20.62)	.750-20 UNEF	.597 (15.16)	.479 (12.17)	.938 (23.83)
2	12	.500 (12.70)	.406 (10.31)	.875 (22.23)	.938 (23.83)	.750-20 UNEF	.539 (13.69)	.479 (12.17)	.938 (23.83)
3	12	.405 (10.29)	.316 (8.03)	1.000 (25.40)	.812 (20.62)	.750-20 UNEF	.597 (15.16)	.479 (12.17)	.938 (23.83)
4	14	.625 (15.88)	.560 (14.22)	1.062 (26.97)	1.125 (28.58)	.875-20 UNEF	.597 (15.16)	.479 (12.17)	1.062 (26.97)
5	14	.605 (15.37)	.511 (12.98)	1.000 (25.40)	1.062 (26.97)	.875-20 UNEF	.597 (15.16)	.479 (12.17)	1.062 (26.97)
6	14	.530 (13.46)	.430 (10.92)	1.000 (25.40)	1.062 (26.97)	.875-20 UNEF	.597 (15.16)	.479 (12.17)	1.062 (26.97)
7	14	.405 (10.29)	.316 (8.03)	1.000 (25.40)	1.062 (26.97)	.875-20 UNEF	.597 (15.16)	.479 (12.17)	1.062 (26.97)
8	18	.828 (21.03)	.715 (18.16)	1.125 (28.58)	1.250 (31.75)	1.125-18 UNEF	.597 (15.16)	.479 (12.17)	1.312 (33.32)
9	20	1.055 (26.80)	.930 (23.62)	1.500 (38.10)	1.375 (34.93)	1.250-18 UNEF	.597 (15.16)	.479 (12.17)	1.438 (36.53)
10	20	1.000 (25.40)	.875 (22.23)	1.500 (38.10)	1.375 (34.93)	1.250-18 UNEF	.597 (15.16)	.479 (12.17)	1.438 (36.53)
11	20	.900 (22.86)	.787 (19.99)	1.250 (31.75)	1.375 (34.93)	1.250-18 UNEF	.597 (15.16)	.479 (12.17)	1.438 (36.53)
12	20	.750 (19.05)	.637 (16.18)	1.250 (31.75)	1.375 (34.93)	1.250-18 UNEF	.597 (15.16)	.479 (12.17)	1.438 (36.53)
13	22	1.109 (28.17)	.984 (24.99)	1.500 (38.10)	1.625 (41.28)	1.375-18 UNEF	.597 (15.16)	.479 (12.17)	1.562 (39.67)
14	22	1.000 (25.40)	.875 (22.23)	1.500 (38.10)	1.625 (41.28)	1.375-18 UNEF	.597 (15.16)	.479 (12.17)	1.562 (39.67)
15	24	1.375 (34.93)	1.250 (31.75)	2.000 (50.80)	1.875 (47.63)	1.625-18 UNEF	.597 (15.16)	.479 (12.17)	1.812 (46.02)
16	24	1.310 (33.27)	1.185 (30.10)	1.750 (44.45)	1.875 (47.63)	1.625-18 UNEF	.597 (15.16)	.479 (12.17)	1.812 (46.02)
17	24	1.230 (31.24)	1.105 (28.07)	1.750 (44.45)	1.875 (47.63)	1.625-18 UNEF	.597 (15.16)	.479 (12.17)	1.812 (46.02)
18	24	1.180 (29.97)	1.055 (26.80)	1.750 (44.45)	1.875 (47.63)	1.625-18 UNEF	.597 (15.16)	.479 (12.17)	1.812 (46.02)
19	28	1.531 (38.89)	1.406 (35.71)	2.000 (50.80)	2.062 (52.37)	1.875-16 UN	.597 (15.16)	.479 (12.17)	2.062 (52.37)
20	28	1.445 (36.70)	1.320 (33.53)	2.000 (50.80)	2.062 (52.37)	1.875-16 UN	.597 (15.16)	.479 (12.17)	2.062 (52.37)
21	28	1.375 (34.93)	1.250 (31.75)	2.000 (50.80)	2.062 (52.37)	1.875-16 UN	.597 (15.16)	.479 (12.17)	2.062 (52.37)
22	32	1.825 (46.36)	1.700 (43.18)	2.438 (61.93)	2.312 (58.72)	2.062-16 UNS	.710 (18.03)	.479 (12.17)	2.312 (58.72)
23	32	1.730 (43.94)	1.605 (40.77)	2.438 (61.93)	2.312 (58.72)	2.062-16 UNS	.710 (18.03)	.479 (12.17)	2.312 (58.72)
24	32	1.656 (42.06)	1.531 (38.89)	2.250 (57.15)	2.312 (58.72)	2.062-16 UNS	.597 (15.16)	.479 (12.17)	2.312 (58.72)
25	36	2.062 (52.37)	1.917 (48.69)	2.750 (69.85)	2.500 (63.50)	2.312-16 UNS	.710 (18.03)	.479 (12.17)	2.562 (65.07)
26	36	1.984 (50.39)	1.859 (47.22)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	.710 (18.03)	.479 (12.17)	2.562 (65.07)
27	36	1.900 (48.26)	1.775 (45.09)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	.710 (18.03)	.479 (12.17)	2.562 (65.07)
28	36	1.825 (46.36)	1.700 (43.18)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	.710 (18.03)	.479 (12.17)	2.562 (65.07)
29	36	1.730 (43.94)	1.605 (40.77)	2.438 (61.93)	2.500 (63.50)	2.312-16 UNS	.710 (18.03)	.479 (12.17)	2.562 (65.07)
30	40	2.375 (60.33)	2.230 (56.64)	2.875 (73.03)	2.812 (71.42)	2.625-16 UN	.710 (18.03)	.667 (16.94)	2.875 (73.03)
31	40	2.250 (57.15)	2.105 (53.48)	2.750 (69.85)	2.625 (66.68)	2.625-16 UN	.710 (18.03)	.667 (16.94)	2.875 (73.03)
32	40	2.145 (54.38)	2.000 (50.80)	2.750 (69.85)	2.625 (66.68)	2.625-16 UN	.710 (18.03)	.667 (16.94)	2.875 (73.03)
33	40	2.062 (52.37)	1.917 (48.69)	2.750 (69.85)	2.625 (66.68)	2.625-16 UN	.710 (18.03)	.667 (16.94)	2.875 (73.03)



AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
CABLE SEALING, STRAIGHT, SET-UP, CATEGORY 1A
(FOR MIL-DTL-22992 CONNECTORS, CLASSES C, J, AND R)

AS85049/4
SHEET 7 OF 11

**REV.
C**

CONFIGURATION C - STYLE 3 CABLE SEALING AND GRIPPING (CONTINUED)

TABLE 3 - FIGURE 1C CONFIGURATIONS AND DIMENSIONS (CONTINUED)

SIZE NO.	SHELL SIZE	H MAX	J APPROX. FREE LENGTH	K +.015 -.025	L THREAD (PLATED) CLASS 2 (A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	3.810 (96.77)	4.688 (119.08)	1.219 (30.96)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)
2	12	3.248 (82.50)	4.344 (110.34)	.871 (22.12)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)
3	12	3.810 (96.77)	3.688 (93.68)	1.219 (30.96)	.875-0.1P-0.2L-DS	1.094 (27.79)	.765 (19.43)	5.00 (127.00)
4	14	4.024 (102.21)	6.188 (157.18)	1.371 (34.82)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
5	14	3.712 (94.28)	5.188 (131.78)	1.121 (28.47)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
6	14	3.712 (94.28)	4.688 (119.08)	1.121 (28.47)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
7	14	3.712 (94.28)	3.688 (93.68)	1.121 (28.47)	1.000-0.1P-0.2L-DS	1.219 (30.96)	.765 (19.43)	5.00 (127.00)
8	18	4.087 (103.81)	6.688 (169.88)	1.343 (34.11)	1.250-0.1P-0.2L-DS	1.469 (37.31)	.980 (24.89)	5.00 (127.00)
9	20	4.212 (106.98)	7.688 (195.28)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
10	20	4.212 (106.98)	7.188 (182.58)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
11	20	4.150 (105.41)	7.188 (182.58)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
12	20	4.150 (105.41)	7.188 (182.58)	1.371 (34.82)	1.375-0.1P-0.2L-DS	1.562 (39.67)	.980 (24.89)	5.00 (127.00)
13	22	4.212 (106.98)	7.688 (195.28)	1.371 (34.82)	1.500-0.1P-0.2L-DS	1.688 (42.88)	.980 (24.89)	6.00 (152.40)
14	22	4.212 (106.98)	7.188 (182.58)	1.371 (34.82)	1.500-0.1P-0.2L-DS	1.688 (42.88)	.980 (24.89)	6.00 (152.40)
15	24	4.275 (108.59)	9.688 (246.08)	1.309 (33.25)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
16	24	4.275 (108.59)	8.688 (220.68)	1.372 (34.85)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
17	24	4.275 (108.59)	8.188 (207.98)	1.372 (34.85)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
18	24	4.275 (108.59)	8.188 (207.98)	1.372 (34.85)	1.750-0.1P-0.2L-DS	1.938 (49.23)	.980 (24.89)	6.00 (152.40)
19	28	4.337 (110.16)	10.688 (271.48)	1.371 (34.82)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)
20	28	4.337 (110.16)	9.688 (246.08)	1.371 (34.82)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)
21	28	4.337 (110.16)	9.688 (246.08)	1.371 (34.82)	2.000-0.1P-0.2L-DS	2.219 (56.36)	.980 (24.89)	6.00 (152.40)
22	32	4.704 (119.48)	13.688 (347.68)	1.371 (34.82)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
23	32	4.704 (119.48)	13.688 (347.68)	1.371 (34.82)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
24	32	4.399 (111.73)	12.688 (322.28)	1.370 (34.80)	2.250-0.1P-0.2L-DS	2.469 (62.71)	.980 (24.89)	6.00 (152.40)
25	36	4.704 (119.48)	14.188 (360.38)	1.375 (34.93)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
26	36	4.673 (118.69)	13.688 (347.68)	1.344 (34.14)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
27	36	4.673 (118.69)	13.688 (347.68)	1.344 (34.14)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
28	36	4.673 (118.69)	13.688 (347.68)	1.344 (34.14)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
29	36	4.673 (118.69)	13.688 (347.68)	1.344 (34.14)	2.500-0.1P-0.2L-DS	2.719 (69.06)	.980 (24.89)	6.00 (152.40)
30	40	5.000 (127.00)	18.188 (461.98)	1.421 (36.09)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
31	40	5.000 (127.00)	17.188 (436.58)	1.421 (36.09)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
32	40	4.939 (125.45)	14.188 (360.38)	1.422 (36.12)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)
33	40	4.939 (125.45)	14.188 (360.38)	1.422 (36.12)	2.750-0.1P-0.2L-DS	2.969 (75.41)	.980 (24.89)	6.00 (152.40)

NOTES:

- DIMENSIONS ARE IN INCHES
- METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.
- UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± 0.016 (0.41).
- DIMENSIONS APPLY AFTER PLATING.
- CABLE RANGE IS DEFINED AS THE ENVELOPE AREA FOR THE WIRE BUNDLE. THIS DIMENSION IS NOT MEANT TO DEFINE THE CLAMP HARDWARE LIMITS.

	AEROSPACE STANDARD	AS85049/4 SHEET 8 OF 11	REV. C
	CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, SET-UP, CATEGORY 1A (FOR MIL-DTL-22992 CONNECTORS, CLASSES C, J, AND R)		