

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

SURFACE VEHICLE STANDARD

SAE J891

REV.
JUN93Issued 1964-08
Revised 1993-06-14

Superseding J891a

Submitted for recognition as an American National Standard

(R) SPRING NUTS

1. Scope—Included herein are complete general and dimensional specifications for metric and inch types of spring nuts recognized as SAE standard. These nuts are intended for general use where the engagement of a single thread on the mating screw is considered adequate for the application.

It should be noted that spring nuts having other configurations, dimensions, provisions for ground, etc., are available and manufacturers should be consulted.

2. References

2.1 Applicable Document—The following publication forms a part of this specification to the extent specified herein. The latest issue of SAE publications shall apply.

2.1.1 SAE PUBLICATION—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J478—Slotted and Recessed Head Screws (ANSI/ASME B18.6.5M & 18.6.7M)

3. General Specifications

3.1 Dimensional Tolerances—Dimensions and tolerances are given in both metric and inch units as designated. In many cases the metric units have been rounded to reflect metric modules rather than being true soft conversions of the corresponding inch dimensions. Tolerance on dimensions in Tables 1 to 9 and Figures 1 to 16 shall be ± 0.25 mm (± 0.010 in) unless otherwise specified.

3.2 Boss Detail—The detail of boss shall be such as to assemble readily and function satisfactorily with the specified screw and meet the performance requirements of this specification except as indicated otherwise.

Both the type "P" and "T" bosses are designed to function with all spaced threaded tapping screws in sizes 3.5 x 1.27 through 6.3 x 1.81 or (#6-20 through 1/4-14) with the exception of the type "T" boss of the 6.3 (1/4). The boss has been designed to perform satisfactorily with either a type AB or B tapping screw.

The sides of the Type P boss (Figure 1) shall be formed to provide an opening conforming to the helix of the mating thread. The opening shall be round and equal to, or slightly larger than, the minor diameter of the mating thread.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAE J891 Revised JUN93

The prongs of the Type T boss (Figure 2) shall be formed to provide a circular opening conforming to the helix of the mating thread and, at the opening, the prongs shall be normal to the axis of the mating thread. The round portion of the opening shall be equal to, or slightly larger than, the minor diameter of the mating thread.

The size and formation of the helical opening (see Table 1) shall be such as to permit ready assembly of the specified screw or gage when inserted from the base of the boss at 90 degrees to the plane of the nut, or component thereof which contains the boss. For machine screw threads, basic GO thread plug gages shall be used to check assembly. For Type A and Type B pitch tapping screw threads, special gages conforming to the maximum limits of the screws may be used in place of the specified screws to check assembly.

- 3.3 Retaining Extrusion Detail**—The size and configuration of the extrusion in the lower leg of "J" shape and "U" shape spring nuts shall be such that nuts will meet the performance requirements of this specification. The size and relative location of the hole and extrusion to the boss shall be such that when nut is assembled onto a test panel having minimum hole size, located at maximum edge distance, the extrusion will snap into the hole and permit the specified screw of maximum size (or special threaded plug gage, Figure 3) to be assembled into the boss normal to the base of boss with interference at the extrusion or the sides of either hole. The screw or gage is to be entered into the boss until the head of the screw or shoulder on gage lightly contacts the bottom of the lower leg. The extrusion shall have a uniform shape and blend evenly from the specified height at point X into the upper surface of the lower leg at points Y and Y' as shown. The critical edges of the extrusion shall be free from burrs which would cause interference as spring nut is assembled to panel.
- 3.4 Material**—Spring steel; SAE 1050 or higher carbon; suitably processed to meet the performance requirements of this specification.
- 3.5 Hardness**—Hardness shall be as specified in Table 3.
- 3.6 Finish**—Spring nuts are normally supplied with corrosion-resistant finish as specified by the purchaser. Nuts subjected to corrosion preventive treatment which might induce hydrogen embrittlement shall be baked or otherwise treated to obviate such embrittlement.
- 3.7 Workmanship**—Spring nuts shall be free from cracks, burrs, splits, loose scale, or any other defects that might affect their serviceability.
- 3.8 Performance**—Spring nuts shall perform in accordance with the requirements specified in Table 2 except as indicated otherwise.
- 3.9 Assembly Detail**—The recommended design data pertaining to assembly of "J" shape and "U" shape spring nuts for guidance of users is presented in Tables 4 and 5. The proper method of assembling these corrosion-resistant nuts to panels is described as follows:
- "J" shape nuts are assembled to panel by placing nut against the edge of the panel as shown opposite and rocking onto panel in the direction indicated by the arrow. See Figure 4A.
- "U" shape nuts are assembled to panel by placing nut over edge of the panel as shown opposite and pushing onto the panel in the direction indicated by the arrow. See Figure 4B.
- 4. Tests and Test Fixtures for Evaluating Spring Nut Performance**—Spring nuts shall be subjected to the following tests to determine conformance with the performance requirements specified in Table 2 except as indicated otherwise.

SAE J891 Revised JUN93

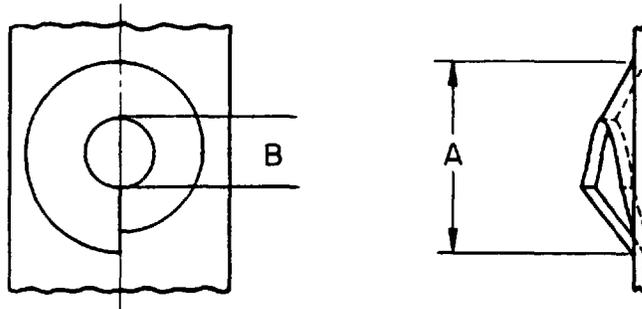


FIGURE 1—TYPE P BOSS

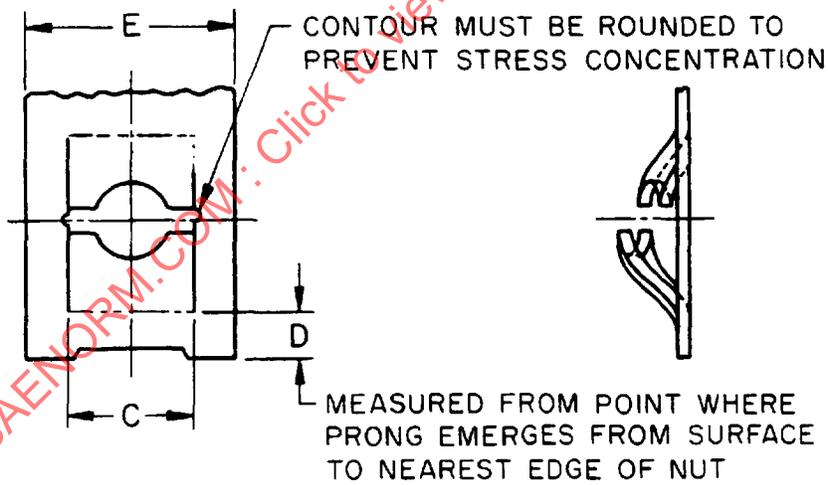


FIGURE 2—TYPE T BOSS

SAENORM.COM: Click to view the full PDF of j891_199306

SAE J891 Revised JUN93

TABLE 1—DETAIL OF BOSSES

Screw Thread Type	Screw Nominal Size mm	Screw Nominal Size in	Type P Boss A Base Dia Ref mm	Type P Boss A Base Dia Ref in	Type P Boss B Hole Dia mm	Type P Boss B Hole Dia in	Type P Boss E Min Blank Width mm	Type P Boss E Min Blank Width in
Machine	M3.5 x 0.6	6-32	6.6	0.26	2.6	0.104	8.6	0.340
Machine	M4 x 0.7	8-32	5.8	0.23	3.3	0.130	10.3	0.406
Machine	M5 x 0.8	10-24	7.1	0.28	3.6	0.143	12.7	0.500
Machine		1/4-20	9.4	0.37	4.9	0.193	14.3	0.562
Tapping	3.5	#6	6.4	0.25	2.7	0.105	8.6	0.340
Tapping	4.2	#8	7.1	0.28	3.1	0.123	10.3	0.406
Tapping	4.8	#10	7.1	0.28	3.6	0.142	12.7	0.500
Tapping	6.3	1/4 #14	9.6	0.38	4.9	0.193	14.3	0.562

TABLE 1—DETAIL OF BOSSES (CONTINUED)

Screw Thread Type	Screw Nominal Size mm	Screw Nominal Size in	Type T Boss C Width of Shear Basic mm	Type T Boss C Width of Shear Basic in	Type T Boss D' End of Slit to Edge Min mm	Type T Boss D' End of Slit to Edge Min in	Type T Boss E Min Blank Width mm	Type T Boss E Min Blank Width in
Machine	M3.5 x 0.6	6-32	4.0	0.157	1.3	0.050	8.0	0.312
Machine	M4 x 0.7	8-32	4.7	0.184	1.3	0.050	10.3	0.406
Machine	M5 x 0.8	10-24	5.3	0.210	1.3	0.050	9.5	0.375
Machine		1/4-20	6.9	0.270	2.3	0.090	12.7	0.500
Tapping	3.5	#6	4.0	0.157	1.3	0.050	8.0	0.312
Tapping	4.2	#8	4.7	0.184	1.5	0.060	10.3	0.406
Tapping	4.8	#10	5.3	0.210	2.0	0.080	12.7	0.500
Tapping	6.3	1/4 #14	6.9	0.270	2.3	0.090	14.3	0.562

NOTE 1—The tabulated values are applicable to standard spring nuts only. This factor shall be sufficient to meet the performance requirements for torque, tensile strength, and vibration as set forth in Table 2.

TABLE 2—PERFORMANCE REQUIREMENTS FOR SPRING NUTS

Screw Thread Type	Screw Nominal Size mm	Screw Nominal Size in	Recommended Installation Torque-Max N · m	Recommended Installation Torque-Max lb-in	Clamp-Load at Recommended Installation		Destructive Torque Min N · m	Destructive Torque Min lb-in
					Torque-Min kN	Torque-Min lb		
Machine	M3.5 x 0.6	6-32	0.6	6	0.36	80	1.0	8
Machine	M4 x 0.7	8-32	1.0	8	0.44	100	1.2	10
Machine	M5 x 0.8	10-24	1.6	14	0.62	140	2.0	17
Machine		1/4-20	4.0	35	1.47	330	5.0	45
Tapping	3.5	#6	1.4	12	1.06	240	2.0	17
Types	4.2	#8	2.2	20	1.78	400	2.8	25
AB & B	4.8	#10	4.0	35	2.45	550	4.9	44
	6.3	#14-1/4	7.0	60	3.34	750	9.0	80

TABLE 2—PERFORMANCE REQUIREMENTS FOR SPRING NUTS (CONTINUED)

Screw Thread Type	Screw Nominal Size mm	Screw Nominal Size in	Ultimate Tensile Strength Min		Ultimate Tensile Strength Min	
			Type P kN	Type P lb	Type T kN	Type T lb
Machine	M3.5 x 0.6	6-32	0.69	155	0.69	156
Machine	M4 x 0.7	8-32	0.89	200	0.84	189
Machine	M5 x 0.8	10-24	1.40	315	1.22	274
Machine		1/4-20	2.54	570	2.45	550
Tapping	3.5 x 1.3	#6-25	2.22	500	1.89	425
Types	4.2 x 1.4	#8-18	2.76	620	2.38	534
AB & B	4.8 x 1.6	#10-16	4.45	1000	2.99	672
	6.3 x 1.8	1/4-14	5.03	1130	5.15	1158

SAE J891 Revised JUN93

TABLE 3—FASTENER HARDNESS

Material Thickness mm	Material Thickness in	Rockwell Scale	Dial Reading	Conversion to Rockwell C Scale	Conversion to Vickers
up to 0.41	up to 0.016	15 N	80.4 to 85.5	40 to 50	390 to 515
0.43 to 0.61	0.017 to 0.024	30 N	59.5 to 68.5	40 to 50	390 to 515
0.64 to 0.99	0.025 to 0.039	45 N	43.1 to 55.0	40 to 50	390 to 515
1.02 and over	0.040 and over	C	40 to 50	40 to 50	390 to 515

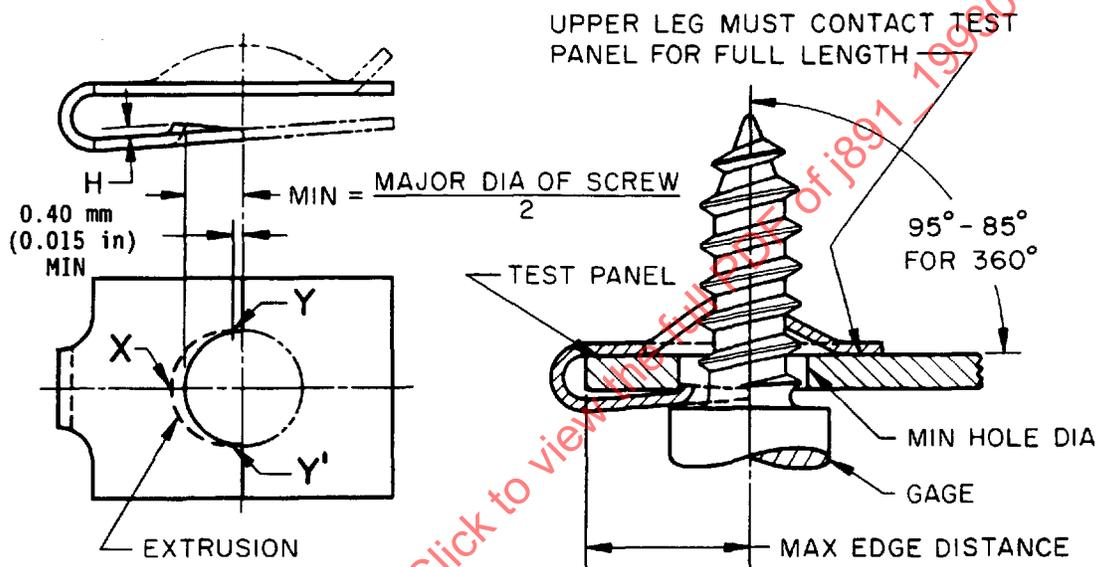


FIGURE 3—OPTIONAL EXTRUSION AND GAGING DETAIL

SAENORM.COM : Click to view full PDF of J891_199306

SAE J891 Revised JUN93

- 4.1 Test Plates and Screws for Tests**—To assure uniformity of test results, the test plates and screws used for the tests shall conform to the following specifications.

Test plates shall have boundary dimensions and hole sizes as depicted in Figure 5. The thickness of test plates shall be equal to the mean of the specified panel range within a tolerance of ± 0.03 mm (± 0.001 in). The holes in test plates shall be located at the maximum edge distance specified for the particular spring nut within a tolerance of ± 0.03 mm (± 0.001 in). Test plates and panels shall have a minimum hardness of Rockwell C 50-54 (HV 515-580).

The screws used for test purposes shall conform to the specifications in SAE J478 (ANSI/ASME B18.6.5M and 18.6.7M) for the respective sizes and types. They shall be Hexagon Head style and a length which is compatible with the test fixture, with a 72 h salt spray corrosion resistant phosphate finish (ASTM B 117).

- 4.2 Torque Tests**—Spring nut samples shall be assembled with a test screw onto a test plate and tightened to the recommended installation torque. For wide-range design spring nuts, this test shall be performed with a device capable of measuring the clamp load developed and, when assembly is tightened to the recommended installation torque, the clamp load obtained shall not be less than the value tabulated.

Upon disassembly, the boss shall return to a position that will accept reentry of the test screw.

The spring nut, when reassembled and tightened on the test plate, shall not strip the threads on the screw nor fail the nut boss at less than the ultimate torque specified.

- 4.3 Tensile Tests**—When the spring nut on a test plate is assembled to suitable back-up plates at the recommended installation torque and pulled in a tensile testing machine, the spring nut shall meet the ultimate strengths specified.

The ultimate strength shall be considered reached when the boss or the thread on the screw is destroyed. In performing tensile test, care should be taken to assure there is no interference between the screw and the holes in the plates. A typical tensile test fixture is illustrated in Figure 6.

- 4.4 Preassembly and Retention Test**—The "J" shape and "U" shape spring nuts shall preassemble onto test panels of thickness equal to the two extremes of the panel ranges specified, having minimum holes, located at the maximum edge distance. The extrusion in the lower leg shall snap into the hole and when nuts are so assembled, a pull force of 13.3 N (3 lb) minimum applied parallel to the upper leg in line with the axis of the nut shall be required to remove the nut from the panel.

5. Notes

- 5.1 Marginal Indicia**—The (R) is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. If the symbol is next to the report title, it indicates a complete revision of the report.

PREPARED BY THE SAE IRON AND STEEL TECHNICAL COMMITTEE SC8—
CARBON AND ALLOY STEEL HARDENABILITY

SAE J891 Revised JUN93

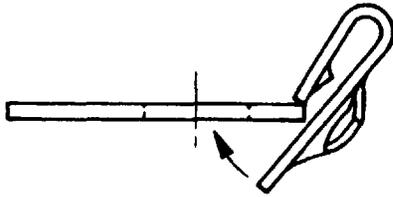


FIGURE 4A—J SHAPE NUTS


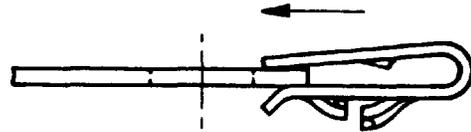



FIGURE 4B—U SHAPE NUTS

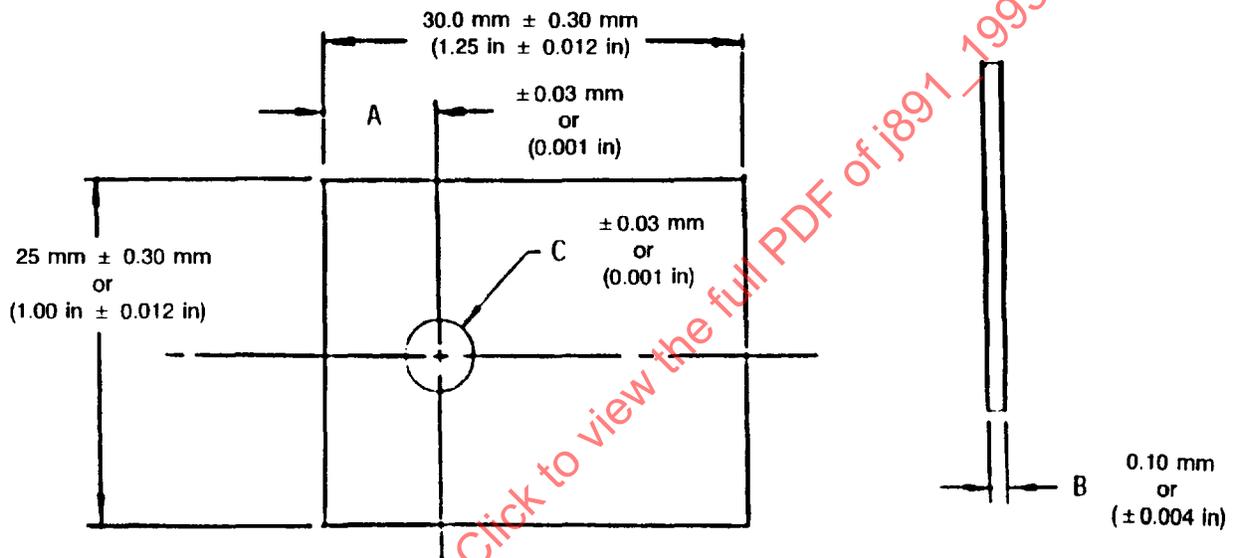

Machine and Tapping Screws Size mm	Machine and Tapping Screws Size in	A Edge to Center	B Plate Thickness	C Hole Dia mm	C Hole Dia in
3.5	#6	Equals Maximum Edge Distance	Equals Mean of Panel Range	6.35	0.250
4.2	#8	Specified in Assembly Data or on Part Drawing	Specified in Dimensional Tables	7.14	0.281
4.8	#10			7.92	0.312
6.3	#14-1/4			9.52	0.375

FIGURE 5—TEST PLATES

SAE J891 Revised JUN93

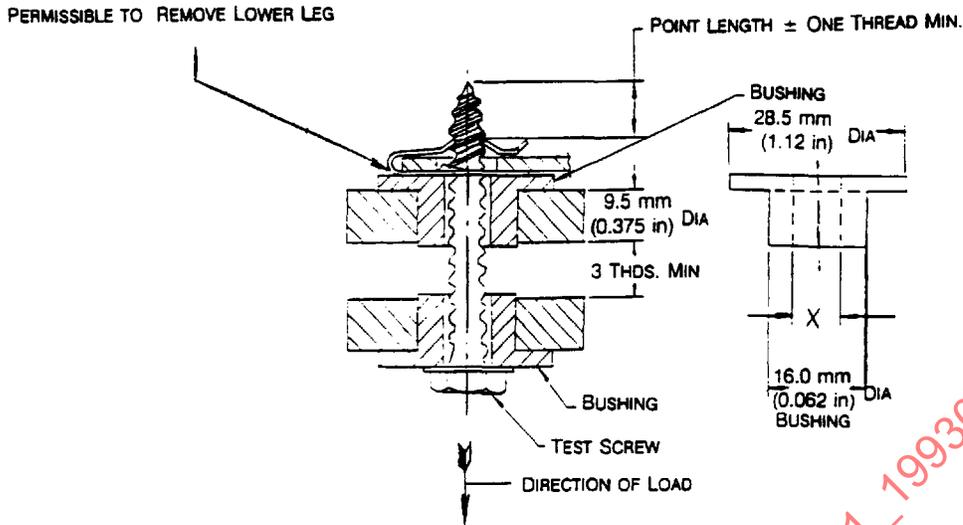

Tapping Screw Size mm	Machine and Tapping Screw Size in	X mm	X in
3.5	#6	4.0-4.5	0.157-0.177
4.2	#8	4.7-5.2	0.186-0.204
4.8	#10	5.3-5.8	0.208-0.228
6.3	1/4	6.8-7.3	0.268-0.287

FIGURE 6—TYPICAL TENSILE TEST FIXTURE

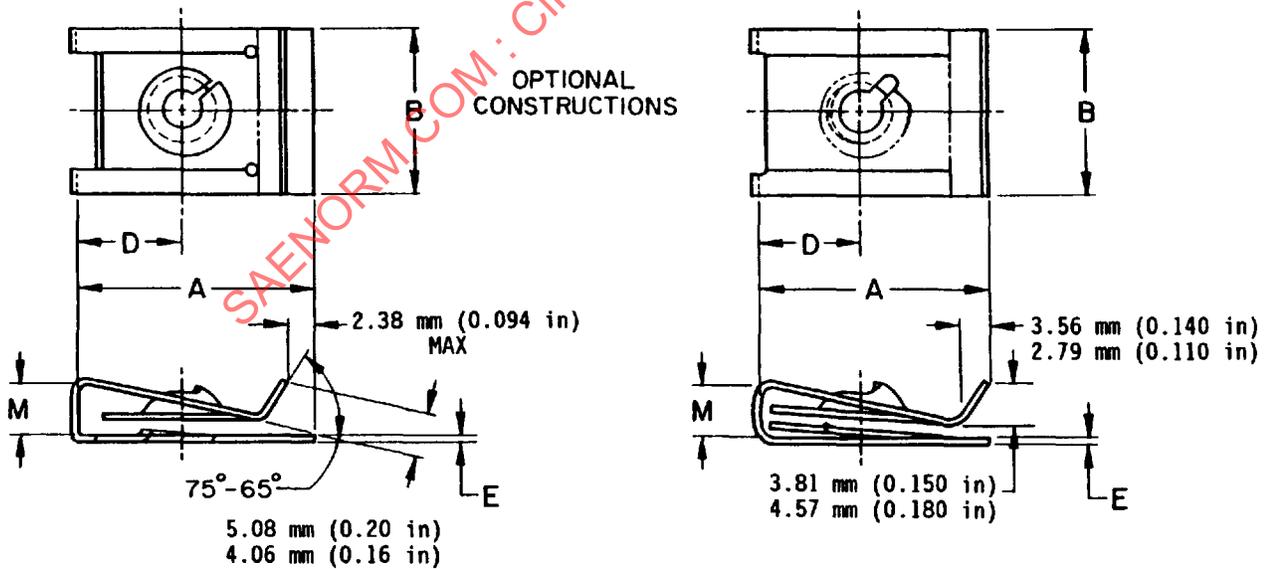


FIGURE 7—U SHAPE SHORT THREAD STYLE AND LONG THROAT STYLE

SAE J891 Revised JUN93

TABLE 4—DIMENSIONS OF U SHAPE WIDE-RANGE DESIGN SPRING NUTS WITH OR WITHOUT RETAINING EXTRUSION (FIGURE 7)

Tapping Screw Size ¹ mm	Tapping Screw Size ¹ in	Panel Thickness Range mm	Panel Thickness Range in	Style	A Leg Length		B Nut Width ±0.38	B Nut Width ±0.015	D Throat Depth mm	D Throat Depth in	E Stock Thickness mm	E Stock Thickness in	M Width at Fold mm	M Width at Fold in
					mm	in								
3.5	#6	0.64	0.025	Short	19.56	0.770	13.58	0.535	8.64	0.34	0.46	0.018	3.81	0.150
3.5	#6	0.64	0.025	Short	19.56	0.770	13.58	0.535	9.14	0.36	0.46	0.018	3.81	0.150
3.5	#6	3.66	0.150	Long	25.4	1.000	13.58	0.535	14.48	0.57	0.68	0.027	4.04	0.190
3.5	#6	3.66	0.150	Long	25.4	1.000	13.58	0.535	15.24	0.60	0.68	0.027	4.04	0.190
3.5	#6	3.18	0.125	Short	19.56	0.770	13.58	0.535	8.64	0.34	0.46	0.018	6.60	0.260
3.5	#6	3.18	0.125	Short	19.56	0.770	13.58	0.535	9.14	0.36	0.46	0.018	6.60	0.260
3.5	#6	6.35	0.250	Long	25.4	1.000	13.58	0.535	14.48	0.57	0.68	0.027	7.11	0.280
3.5	#6	6.35	0.250	Long	25.4	1.000	13.58	0.535	15.24	0.60	0.68	0.027	7.11	0.280
4.2	#8	0.64	0.025	Short	19.56	0.770	13.58	0.535	8.64	0.34	0.58	0.023	3.81	0.150
4.2	#8	0.64	0.025	Short	19.56	0.770	13.58	0.535	9.14	0.36	0.58	0.023	3.81	0.150
4.2	#8	3.66	0.150	Long	25.4	1.000	13.58	0.535	14.48	0.57	0.76	0.030	4.04	0.190
4.2	#8	3.66	0.150	Long	25.4	1.000	13.58	0.535	15.24	0.60	0.76	0.030	4.04	0.190
4.2	#8	3.18	0.125	Short	19.56	0.770	13.58	0.535	8.64	0.34	0.58	0.023	6.60	0.260
4.2	#8	3.18	0.125	Short	19.56	0.770	13.58	0.535	9.14	0.36	0.58	0.023	6.60	0.260
4.2	#8	6.35	0.250	Long	25.4	1.000	13.58	0.535	14.48	0.57	0.76	0.030	7.11	0.280
4.2	#8	6.35	0.250	Long	25.4	1.000	13.58	0.535	15.24	0.60	0.76	0.030	7.11	0.280
4.8	#10	0.64	0.025	Short	19.56	0.770	16.12	0.635	8.64	0.34	0.71	0.028	3.81	0.150
4.8	#10	0.64	0.025	Short	19.56	0.770	16.12	0.635	9.14	0.36	0.71	0.028	3.81	0.150
4.8	#10	3.66	0.150	Long	25.4	1.000	16.12	0.635	14.48	0.57	0.88	0.035	4.04	0.190
4.8	#10	3.66	0.150	Long	25.4	1.000	16.12	0.635	15.24	0.60	0.88	0.035	4.04	0.190
4.8	#10	3.18	0.125	Short	19.56	0.770	16.12	0.635	8.64	0.34	0.71	0.028	6.60	0.260
4.8	#10	3.18	0.125	Short	19.56	0.770	16.12	0.635	9.14	0.36	0.71	0.028	6.60	0.260
4.8	#10	6.35	0.250	Long	25.4	1.000	16.12	0.635	14.48	0.57	0.88	0.035	7.11	0.280
4.8	#10	6.35	0.250	Long	25.4	1.000	16.12	0.635	15.24	0.60	0.88	0.035	7.11	0.280
6.3	1/4	0.64	0.025	Short	19.56	0.770	16.12	0.635	8.64	0.34	0.84	0.033	3.81	0.150
6.3	1/4	0.64	0.025	Short	19.56	0.770	16.12	0.635	9.14	0.36	0.84	0.033	3.81	0.150
6.3	1/4	3.66	0.150	Long	25.4	1.000	16.12	0.635	14.48	0.57	0.99	0.039	4.04	0.190
6.3	1/4	3.66	0.150	Long	25.4	1.000	16.12	0.635	15.24	0.60	0.99	0.039	4.04	0.190
6.3	1/4	3.18	0.125	Short	19.56	0.770	16.12	0.635	8.64	0.34	0.99	0.039	6.60	0.260
6.3	1/4	3.18	0.125	Short	19.56	0.770	16.12	0.635	9.14	0.36	0.99	0.039	6.60	0.260
6.3	1/4	6.35	0.250	Long	25.4	1.000	16.12	0.635	14.48	0.57	0.99	0.039	7.11	0.280
6.3	1/4	6.35	0.250	Long	25.4	1.000	16.12	0.635	15.24	0.60	0.99	0.039	7.11	0.280

¹ See Boss Detail under General Specifications for applicability of types and sizes. Type P spring nuts of similar proportions are also available in respective machine screw sizes 3.5 mm (#6), 4.2 mm (#8), 4.8 mm (#10), and 6.3 mm (1/4 in), and manufacturers should be consulted for dimensions.

SAE J891 Revised JUN93




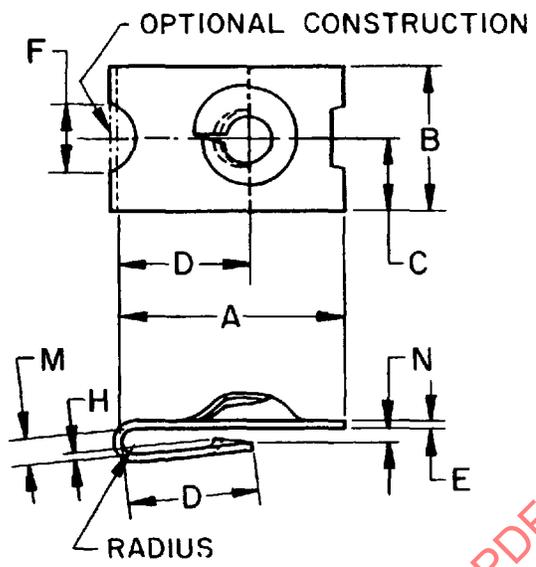


FIGURE 8—J SHAPE
 STYLE I—STANDARD, STYLE II—SHORT, AND STYLE III—LONG THROAT

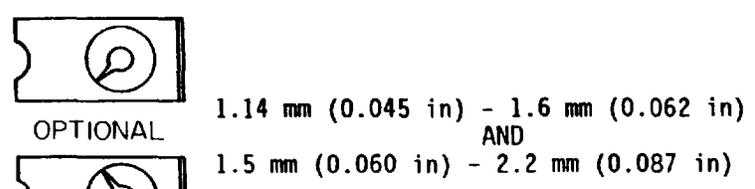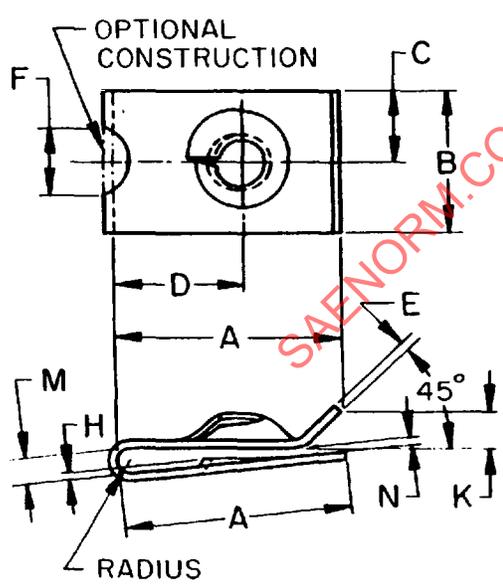

PANEL RANGE IDENTIFICATION

FIGURE 9—U SHAPE
 STYLE—STANDARD, STYLE II—SHORT, AND STYLE III—LONG THROAT

SAE J891 Revised JUN93

TABLE 5—DIMENSIONS OF TYPE P, J SHAPE, AND U SHAPE REGULAR DESIGN SPRING NUTS (FIGURES 8 AND 9)

Tapping Screw Size' mm	Tapping Screw Size' In	Panel Thickness Range mm	Panel Thickness Range In	Style	A		A		B	C	D		
					Leg Length mm ±0.5	Leg Length J Shape In ±0.02	Leg Length U Shape mm ±0.5	Leg Length U Shape In ±0.02					
3.5	#6	0.64-1.14	0.025-0.045	I	13.5	0.53	15.0	0.59	8.6	4.3	0.17	8.4	0.33
3.5	#6	1.14-1.6	0.045-0.062	I	13.5	0.53	15.0	0.59	8.6	4.3	0.17	8.4	0.33
3.5	#6	0.64-1.14	0.025-0.045	II	11.9	0.47	13.5	0.53	8.6	4.3	0.17	6.9	0.27
3.5	#6	1.14-1.6	0.045-0.062	II	11.9	0.47	13.5	0.53	8.6	4.3	0.17	6.9	0.27
3.5	#6	0.64-1.14	0.025-0.045	III	17.8	0.70	19.3	0.76	8.6	4.3	0.17	13.2	0.52
3.5	#6	1.14-1.6	0.045-0.062	III	17.8	0.70	19.3	0.76	8.6	4.3	0.17	13.2	0.52
4.2	#8	0.64-1.14	0.025-0.045	I	15.5	0.61	17.0	0.67	10.2	5.1	0.20	9.9	0.39
4.2	#8	1.14-1.6	0.045-0.062	I	15.5	0.61	17.0	0.67	10.2	5.1	0.20	9.9	0.39
4.2	#8	0.64-1.14	0.025-0.045	II	13.0	0.51	14.5	0.57	10.2	5.1	0.20	7.1	0.26
4.2	#8	1.14-1.6	0.045-0.062	II	13.0	0.51	14.5	0.57	10.2	5.1	0.20	7.1	0.26
4.2	#8	0.64-1.14	0.025-0.045	III	20.6	0.81	22.4	0.88	10.2	5.1	0.20	14.7	0.58
4.2	#8	1.14-1.6	0.045-0.062	III	20.6	0.81	22.4	0.88	10.2	5.1	0.20	14.7	0.58
4.8	#10	0.64-1.14	0.025-0.045	I	16.3	0.64	17.8	0.70	11.4	5.7	0.25	9.9	0.39
4.8	#10	1.14-1.6	0.045-0.062	I	16.3	0.64	17.8	0.70	11.4	5.7	0.25	9.9	0.39
4.8	#10	0.64-1.14	0.025-0.045	II	15.5	0.61	16.3	0.64	11.4	5.7	0.25	8.4	0.33
4.8	#10	1.14-1.6	0.045-0.062	II	15.5	0.61	16.3	0.64	11.4	5.7	0.25	8.4	0.33
4.8	#10	0.64-1.14	0.025-0.045	III	21.1	0.83	22.6	0.87	11.4	5.7	0.25	14.7	0.58
4.8	#10	1.14-1.6	0.045-0.062	III	21.1	0.83	22.6	0.87	11.4	5.7	0.25	14.7	0.58
6.3	1/4	0.71-1.42	0.028-0.056	I	20.3	0.80	21.8	0.86	14.2	7.1	0.28	11.9	0.47
6.3	1/4	1.5-2.2	0.06-0.087	I	20.3	0.80	21.8	0.86	14.2	7.1	0.28	11.9	0.47
6.3	1/4	0.71-1.42	0.028-0.056	III	27.7	1.09	28.4	1.16	14.2	7.1	0.28	18.3	0.72
6.3	1/4	1.5-2.2	0.06-0.087	III	27.7	1.09	28.4	1.16	14.2	7.1	0.28	18.3	0.72



SAENORM.COM Click to view the full PDF of J891-189306

TABLE 5 - DIMENSIONS OF TYPE P, J SHAPE, AND U SHAPE REGULAR DESIGN SPRING NUTS (FIGURES 8 AND 9) (CONTINUED)

Tapping Screw Size ¹ mm	Tapping Screw Size ¹ in	Style	E		E		F	H	K	K	K	M		N		N		N	
			Stock Thick- ness mm	Stock Thick- ness mm	Stock Thick- ness mm	Stock Thick- ness mm						Width at Fold mm	Width at Fold in	Opening Min mm	Opening Max mm	Opening Min in	Opening Max in	Opening Min mm	Opening Max mm
3.5	#6	I	0.47	0.019	0.54	0.021	5.5	0.22	0.64	0.025	2.0	±0.38	1.5	0.06	0.50	0.02	0.50	0.02	0.02
3.5	#6	I	0.47	0.019	0.54	0.021	5.5	0.22	0.64	0.025	2.0	±0.38	2.0	0.06	1.0	0.04	1.0	0.04	0.04
3.5	#6	II	0.47	0.019	0.54	0.021	5.5	0.22	0.64	0.025	2.0	±0.38	1.5	0.06	0.50	0.02	0.50	0.02	0.02
3.5	#6	II	0.47	0.019	0.54	0.021	5.5	0.22	0.64	0.025	2.0	±0.38	2.0	0.06	1.0	0.04	1.0	0.04	0.04
3.5	#6	III	0.47	0.019	0.54	0.021	5.5	0.22	0.64	0.025	2.0	±0.38	1.5	0.06	0.50	0.02	0.50	0.02	0.02
3.5	#6	III	0.47	0.019	0.54	0.021	5.5	0.22	0.64	0.025	2.0	±0.38	2.0	0.06	1.0	0.04	1.0	0.04	0.04
4.2	#8	I	0.60	0.024	0.67	0.026	5.5	0.22	0.64	0.025	2.3	0.09	1.5	0.06	0.50	0.02	0.50	0.02	0.02
4.2	#8	I	0.60	0.024	0.67	0.026	5.5	0.22	0.64	0.025	2.3	0.09	2.0	0.06	1.0	0.04	1.0	0.04	0.04
4.2	#8	II	0.60	0.024	0.67	0.026	5.5	0.22	0.64	0.025	2.3	0.09	1.5	0.06	0.50	0.02	0.50	0.02	0.02
4.2	#8	II	0.60	0.024	0.67	0.026	5.5	0.22	0.64	0.025	2.3	0.09	2.0	0.06	1.0	0.04	1.0	0.04	0.04
4.2	#8	III	0.60	0.024	0.67	0.026	5.5	0.22	0.64	0.025	2.3	0.09	1.5	0.06	0.50	0.02	0.50	0.02	0.02
4.2	#8	III	0.60	0.024	0.67	0.026	5.5	0.22	0.64	0.025	2.3	0.09	2.0	0.06	1.0	0.04	1.0	0.04	0.04
4.8	#10	I	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.3	0.09	1.5	0.06	0.50	0.02	0.50	0.02	0.02
4.8	#10	I	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.3	0.09	2.0	0.06	1.0	0.04	1.0	0.04	0.04
4.8	#10	II	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.3	0.09	1.5	0.06	0.50	0.02	0.50	0.02	0.02
4.8	#10	II	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.3	0.09	2.0	0.06	1.0	0.04	1.0	0.04	0.04
4.8	#10	III	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.3	0.09	1.5	0.06	0.50	0.02	0.50	0.02	0.02
4.8	#10	III	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.3	0.09	2.0	0.06	1.0	0.04	1.0	0.04	0.04
6.3	1/4	I	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.8	0.11	2.0	0.06	1.0	0.04	1.0	0.04	0.04
6.3	1/4	I	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.8	0.11	2.5	0.10	1.2	0.05	1.2	0.05	0.05
6.3	1/4	III	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.8	0.11	2.0	0.06	1.0	0.04	1.0	0.04	0.04
6.3	1/4	III	0.70	0.028	0.82	0.032	5.5	0.22	0.64	0.025	2.8	0.11	2.5	0.10	1.2	0.05	1.2	0.05	0.05

¹ See Boss Detail under General Specifications for applicability of types and sizes. Type P spring nut of similar proportions are also available in respective machine screw sizes 3.5 mm (#6), 4.2 mm (#8), 4.8 mm (#10), and 6.3 mm (1/4 in), and manufacturers should be consulted for dimensions.
² Diameter of hole punched in blank before forming.

SAE J891 Revised JUN93



PANEL RANGE IDENTIFICATION FOR J SHAPE NUTS

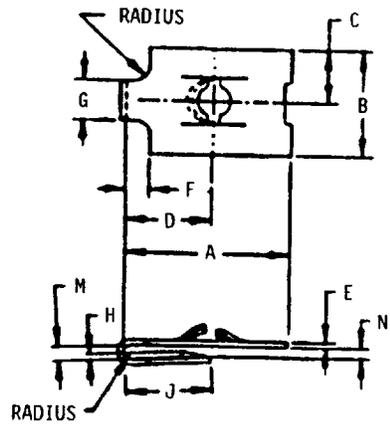


FIGURE 10A
STYLE I—STANDARD THROAT
AND STYLE III—LONG THROAT



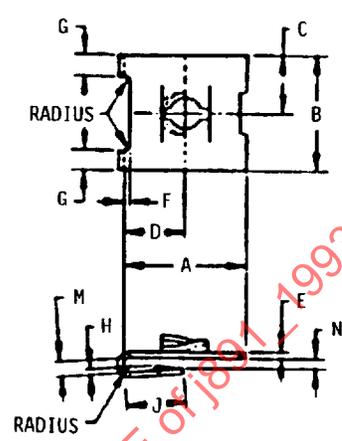


FIGURE 10B
STYLE II—SHORT THROAT

FIGURE 10—J SHAPE



PANEL RANGE IDENTIFICATION FOR U SHAPE NUTS

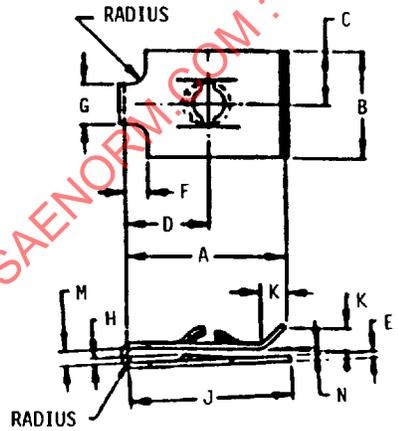


FIGURE 11A
STYLE I—STANDARD THROAT
AND STYLE III—LONG THROAT

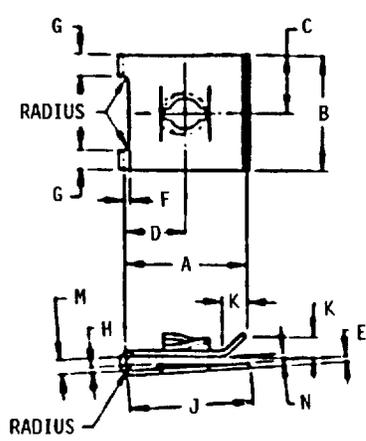


FIGURE 11B
STYLE II—SHORT THROAT

FIGURE 11—U SHAPE

TABLE 6 -- DIMENSIONS OF TYPE T, J SHAPE, AND U SHAPE REGULAR DESIGN SPRING NUTS (FIGURES 10A TO 10B)

Tapping Screw Size ¹ mm	Tapping Screw Size ¹ in	Panel Thick- ness range mm	Panel Thick- ness range in	Style	A Leg Length mm ± 0.5	A Leg Length in ± 0.02	B Nut Width mm	B Nut Width in	C Edge to Center mm	C Edge to Center in	D Throat Depth mm ± 0.5	D Throat Depth in ± 0.02	E Stock Thick- ness			
													mm Min Max	in Min Max		
3.5	#6	0.64-1.14	0.025-0.045	I	16.3	0.64	7.9	0.312	4.0	0.156	8.6	0.34	0.027	0.023	0.69	0.58
3.5	#6	1.14-1.6	0.045-0.062	I	16.3	0.64	7.9	0.312	4.0	0.156	8.6	0.34	0.027	0.023	0.69	0.58
3.5	#6	0.64-1.14	0.025-0.045	II	12.2	0.48	12.7	0.50	6.4	0.25	6.7	0.26	0.027	0.023	0.69	0.58
3.5	#6	1.14-1.6	0.045-0.062	II	12.2	0.48	12.7	0.50	6.4	0.25	6.7	0.26	0.027	0.023	0.69	0.58
3.5	#6	0.64-1.14	0.025-0.045	III	20.1	0.81	7.9	0.312	4.0	0.156	13.0	0.51	0.027	0.023	0.69	0.58
3.5	#6	1.14-1.6	0.045-0.062	III	20.1	0.81	7.9	0.312	4.0	0.156	13.0	0.51	0.027	0.023	0.69	0.58
4.2	#8	0.64-1.14	0.025-0.045	I	17.3	0.68	10.3	0.406	5.2	0.203	9.4	0.37	0.03	0.026	0.76	0.66
4.2	#8	1.14-1.6	0.045-0.062	I	17.3	0.68	10.3	0.406	5.2	0.203	9.4	0.37	0.03	0.026	0.76	0.66
4.2	#8	0.64-1.14	0.025-0.045	II	13.2	0.52	12.7	0.50	6.4	0.25	6.6	0.26	0.03	0.026	0.76	0.66
4.2	#8	1.14-1.6	0.045-0.062	II	13.2	0.52	12.7	0.50	6.4	0.25	6.6	0.26	0.03	0.026	0.76	0.66
4.2	#8	0.64-1.14	0.025-0.045	III	21.8	0.86	10.3	0.406	5.2	0.203	14.0	0.55	0.03	0.026	0.76	0.66
4.2	#8	1.14-1.6	0.045-0.062	III	21.8	0.86	10.3	0.406	5.2	0.203	14.0	0.55	0.03	0.026	0.76	0.66
4.8	#10	0.64-1.14	0.025-0.045	I	19.3	0.76	12.7	0.50	6.4	0.25	10.7	0.42	0.033	0.029	0.84	0.74
4.8	#10	1.14-1.6	0.045-0.062	I	19.3	0.76	12.7	0.50	6.4	0.25	10.7	0.42	0.033	0.029	0.84	0.74
4.8	#10	0.64-1.14	0.025-0.045	II	14.5	0.57	15.9	0.625	7.9	0.312	7.8	0.31	0.033	0.029	0.84	0.74
4.8	#10	1.14-1.6	0.045-0.062	II	14.5	0.57	15.9	0.625	7.9	0.312	7.8	0.31	0.033	0.029	0.84	0.74
4.8	#10	0.64-1.14	0.025-0.045	III	24.4	0.96	12.7	0.50	6.4	0.25	15.5	0.61	0.033	0.029	0.84	0.74
4.8	#10	1.14-1.6	0.045-0.062	III	24.4	0.96	12.7	0.50	6.4	0.25	15.5	0.61	0.033	0.029	0.84	0.74
6.3	1/4	0.71-1.5	0.028-0.06	I	23.4	0.92	14.3	0.562	7.1	0.281	12.6	0.50	0.042	0.035	1.07	0.89
6.3	1/4	1.5-2.2	0.06-0.087	I	23.4	0.92	14.3	0.562	7.1	0.281	12.6	0.50	0.042	0.035	1.07	0.89
6.3	1/4	0.7-1.5	0.028-0.06	III	29.5	1.16	14.3	0.562	7.1	0.281	16.9	0.75	0.039	0.035	0.99	0.89
6.3	1/4	1.5-2.2	0.06-0.087	III	29.5	1.16	14.3	0.562	7.1	0.281	16.9	0.75	0.039	0.035	0.99	0.89

¹ See Boss Detail under General Specifications for applicability of types and sizes. Type I spring nuts of similar proportions are also available in respective machine screw sizes 3.5 mm (#6), 4.2 mm (#8), 4.8 mm (#10), and 6.3 mm (1/4 in), and manufacturers should be consulted for dimensions.

SAE J891 Revised JUN93

TABLE 6 -- DIMENSIONS OF TYPE T, J SHAPE, AND U SHAPE REGULAR DESIGN SPRING NUTS (FIGURES 10A TO 10B) (CONTINUED)

Tapping Screw Size ¹ mm	Tapping Screw Size ¹ in	Style	F		G	H	H	J	J	K	K	N		N		N		
			Notch Depth mm	Notch Depth in								Width mm	Width in	Height mm	Height in	Leg Length mm	Leg Length in	Tang mm
3.5	#6	I	2.0	±0.02	2.8	0.11	0.5	0.02	8.9	±0.5	2.0	0.08	0.5	0.02	0.5	0.02	0.5	0.02
3.5	#6	I	2.0	0.08	2.8	0.11	0.5	0.02	8.9	0.35	2.0	0.08	1.0	0.04	1.0	0.04	1.0	0.04
3.5	#6	II	0.5	0.02	2.3	0.09	0.5	0.02	6.6	0.26	2.0	0.08	0.5	0.02	0.5	0.02	0.5	0.02
3.5	#6	II	0.5	0.02	2.3	0.09	0.5	0.02	6.6	0.26	2.0	0.08	1.0	0.04	1.0	0.04	1.0	0.04
3.5	#6	III	6.2	0.24	3.6	0.14	0.5	0.02	13.0	0.51	2.0	0.08	0.5	0.02	0.5	0.02	0.5	0.02
3.5	#6	III	6.2	0.24	3.6	0.14	0.5	0.02	13.0	0.51	2.0	0.08	1.0	0.04	1.0	0.04	1.0	0.04
4.2	#8	I	2.3	0.09	4.6	0.18	0.64	0.025	9.4	0.37	2.3	0.09	0.5	0.02	0.5	0.02	0.5	0.02
4.2	#8	I	2.3	0.09	4.6	0.18	0.64	0.025	9.4	0.37	2.3	0.09	1.0	0.04	1.0	0.04	1.0	0.04
4.2	#8	II	0.5	0.20	2.3	0.09	0.64	0.025	6.9	0.27	2.3	0.09	0.5	0.02	0.5	0.02	0.5	0.02
4.2	#8	II	0.5	0.20	2.3	0.09	0.64	0.025	6.9	0.27	2.3	0.09	1.0	0.04	1.0	0.04	1.0	0.04
4.2	#8	III	6.9	0.27	4.6	0.18	0.64	0.025	14.2	0.56	2.3	0.09	0.5	0.02	0.5	0.02	0.5	0.02
4.2	#8	III	6.9	0.27	4.6	0.18	0.64	0.025	14.2	0.56	2.3	0.09	1.0	0.04	1.0	0.04	1.0	0.04
4.8	#10	I	2.8	0.11	3.1	0.12	0.64	0.025	10.7	0.42	2.3	0.09	0.5	0.02	0.5	0.02	0.5	0.02
4.8	#10	I	2.8	0.11	3.1	0.12	0.64	0.025	10.7	0.42	2.3	0.09	1.0	0.04	1.0	0.04	1.0	0.04
4.8	#10	II	0.5	0.02	3.3	0.13	0.64	0.025	7.9	0.31	2.3	0.09	0.5	0.02	0.5	0.02	0.5	0.02
4.8	#10	II	0.5	0.02	3.3	0.13	0.64	0.025	7.9	0.31	2.3	0.09	1.0	0.04	1.0	0.04	1.0	0.04
4.8	#10	III	6.4	0.25	4.3	0.17	0.64	0.025	15.5	0.61	2.3	0.09	0.5	0.02	0.5	0.02	0.5	0.02
4.8	#10	III	6.4	0.25	4.3	0.17	0.64	0.025	15.5	0.61	2.3	0.09	1.0	0.04	1.0	0.04	1.0	0.04
6.3	1/4	I	1.5	0.06	4.6	0.18	0.76	0.03	12.5	0.49	2.8	0.11	1.0	0.04	1.0	0.04	1.0	0.04
6.3	1/4	I	1.5	0.06	4.6	0.18	0.76	0.03	12.5	0.49	2.8	0.11	1.2	0.05	1.2	0.05	1.2	0.05
6.3	1/4	III	7.9	0.31	6.4	0.25	0.76	0.03	19.0	0.75	2.8	0.11	1.0	0.04	1.0	0.04	1.0	0.04
6.3	1/4	III	7.9	0.31	6.4	0.25	0.76	0.03	19.0	0.75	2.8	0.11	1.2	0.05	1.2	0.05	1.2	0.05

¹ See Boss Detail under General Specifications for applicability of types and sizes. Type T spring nuts of similar proportions are also available in respective machine screw sizes 3.5 mm (#6), 4.2 mm (#8), 4.8 mm (#10), and 6.3 mm (1/4 in), and manufacturers should be consulted for dimensions.

SAE J891 Revised JUN93

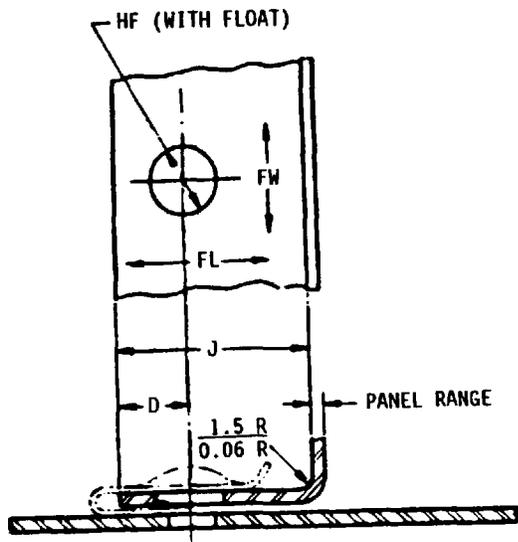


FIGURE 12A

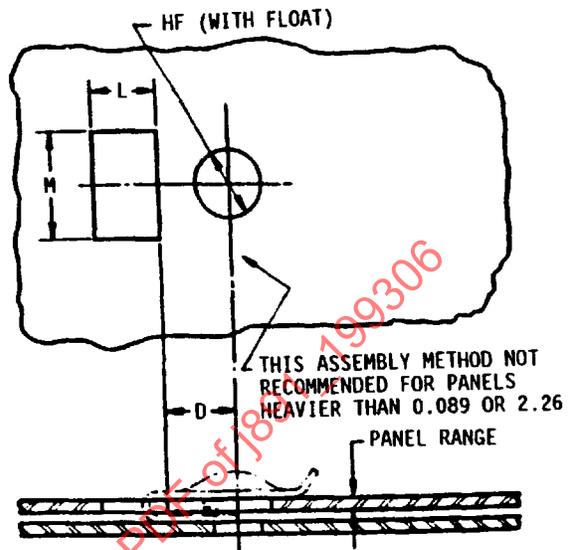


FIGURE 12B

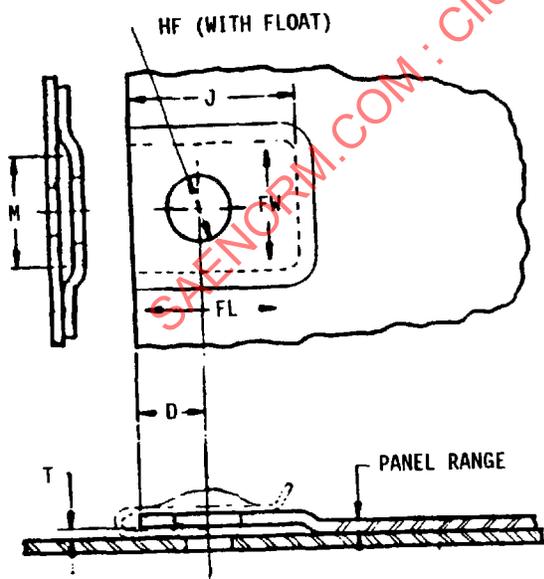


FIGURE 12C

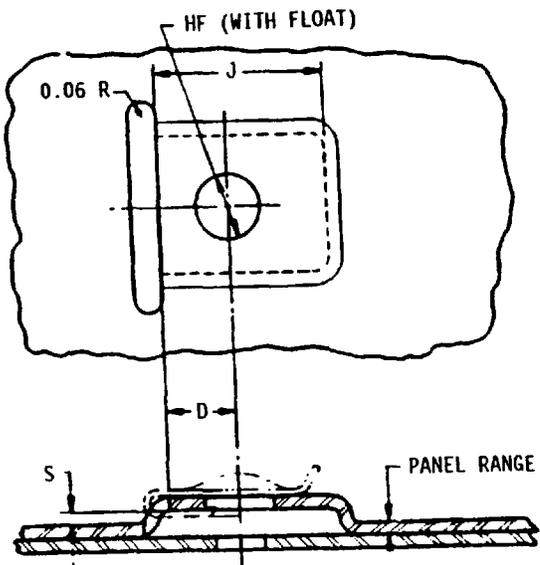


FIGURE 12D

FIGURE 12—RECOMMENDED ASSEMBLY FOR WIDE-RANGE DESIGN SPRING NUTS

SAE J891 Revised JUN93

TABLE 7—RECOMMENDED ASSEMBLY DATA FOR WIDE-RANGE DESIGN
SPRING NUTS¹ (FIGURES 12A TO 12D)

Tapping Screw Size mm	Tapping Screw Size in	Style	D mm ± 0.5	D in ± 0.02	HF Dia mm ± 0.13	HF Dia in ± 0.005	J mm	J in	L Min mm	L Min in
3.5	#6	Short	6.4	0.25	6.4	0.25	19.8	0.78	6.4	0.25
3.5	#6	Long	12.2	0.48	6.4	0.25	25.6	1.01	6.4	0.25
4.2	#8	Short	6.4	0.25	7.1	0.28	19.8	0.78	8.6	0.34
4.2	#8	Long	12.2	0.48	7.1	0.28	25.6	1.01	8.6	0.34
4.8	#10	Short	6.4	0.25	7.9	0.31	19.8	0.78	10.9	0.43
4.8	#10	Long	12.2	0.48	7.9	0.31	25.6	1.01	10.9	0.43
6.3	1/4	Short	6.4	0.25	9.6	0.38	19.8	0.78	12.7	0.50
6.3	1/4	Long	12.2	0.48	9.6	0.38	25.6	1.01	12.7	0.50

TABLE 7—RECOMMENDED ASSEMBLY DATA FOR WIDE-RANGE DESIGN
SPRING NUTS¹ (FIGURES 12A TO 12D) (CONTINUED)

Tapping Screw Size mm	Tapping Screw Size in	Style	M Flat mm	M Flat in	S Min mm	S Min in	T Min mm	T Min in
3.5	#6	Short	16.0	0.63	1.6	0.65	0.6	0.027
3.5	#6	Long	16.0	0.63	1.6	0.65	0.6	0.027
4.2	#8	Short	16.0	0.63	1.6	0.65	0.8	0.03
4.2	#8	Long	16.0	0.63	1.6	0.65	0.8	0.03
4.8	#10	Short	18.5	0.73	1.6	0.65	0.9	0.035
4.8	#10	Long	18.5	0.73	1.6	0.65	0.9	0.035
6.3	1/4	Short	18.5	0.73	1.6	0.65	1.0	0.04
6.3	1/4	Long	18.5	0.73	1.6	0.65	1.0	0.04

¹ These data are intended for design guidance only and are not to be considered a mandatory part of the document. The dimensions specified have been selected to accommodate the optional constructions of wide-range design spring nuts and both Type P and Type T regular design spring nuts, respectively, covered by the document. Tolerances on the nuts and tolerances entailed in the manufacturing processes used to emboss and punch the various assembly features were not considered in the derivation of these dimensions.

**TABLE 8—RECOMMENDED ASSEMBLY DATA FOR TYPES P AND T, J SHAPE, AND U SHAPE
REGULAR DESIGN SPRING NUTS¹ (FIGURES 12A TO 12D)**

Tapping Size mm	Tapping Size in	Style	D mm ± 0.5	D in ± 0.02	HF Dia mm ± 0.13	HF Dia in ± 0.005	J mm	J in	L Min mm	L Min in
3.5	#6	I	6.4	0.25	6.4	0.25	17.5	0.69	5.6	0.22
3.5	#6	II	4.3	0.17	6.4	0.25	13.4	0.53	5.6	0.22
3.5	#6	III	10.6	0.42	6.4	0.25	22.4	0.88	5.6	0.22
4.2	#8	I	7.1	0.23	7.1	0.28	18.5	0.73	6.4	0.25
4.2	#8	II	4.6	0.18	7.1	0.28	14.9	0.59	6.4	0.25
4.2	#8	III	11.6	0.46	7.1	0.28	23.4	0.92	6.4	0.25
4.8	#10	I	7.6	0.30	7.9	0.31	20.6	0.81	7.9	0.31
4.8	#10	II	5.1	0.20	7.9	0.31	15.7	0.62	7.9	0.31
4.8	#10	III	12.2	0.48	7.9	0.31	25.4	1.00	7.9	0.31
6.3	#14 or 1/4	I	0.6	0.38	9.6	0.38	23.8	0.94	11.2	0.44
6.3	#14 or 1/4	III	15.7	0.62	9.6	0.38	29.7	1.17	11.2	0.44

**TABLE 8—RECOMMENDED ASSEMBLY DATA FOR TYPES P AND T, J SHAPE, AND U SHAPE
REGULAR DESIGN SPRING NUTS¹ (FIGURES 12A TO 12D) (CONTINUED)**

Tapping Size mm	Tapping Size in	Style	M Flat mm	M Flat in	S mm Min	S in Min	T mm Min	T in Min
3.5	#6	I	11.8	0.44	1.5	0.06	0.8	0.03
3.5	#6	II	14.9	0.59	1.5	0.06	0.8	0.03
3.5	#6	III	11.8	0.44	1.5	0.06	0.8	0.03
4.2	#8	I	12.7	0.50	1.5	0.06	0.8	0.033
4.2	#8	II	14.9	0.59	1.6	0.065	0.8	0.033
4.2	#8	III	12.7	0.50	1.6	0.065	0.8	0.033
4.8	#10	I	14.9	0.59	1.6	0.065	0.9	0.036
4.8	#10	II	18.2	0.72	1.6	0.065	0.9	0.036
4.8	#10	III	14.9	0.59	1.8	0.07	0.9	0.036
6.3	#14 or 1/4	I	16.8	0.66	2.2	0.085	1.1	0.042
6.3	#14 or 1/4	III	16.8	0.66	2.2	0.085	1.1	0.042

¹ These data are intended for design guidance only and are not to be considered a mandatory part of the document. The dimensions specified have been selected to accommodate the optional constructions of wide-range design spring nuts and both Type P and Type T regular design spring nuts, respectively, covered by the document. Tolerances on the nuts and tolerances entailed in the manufacturing processes used to emboss and punch the various assembly features were not considered in the derivation of these dimensions.