

INTERNATIONAL STANDARD

ISO
8571-4

First edition
1988-10-01

AMENDMENT 1
1992-12-15

Information processing systems – Open Systems Interconnection – File Transfer, Access and Management –

Part 4 : File Protocol Specification

AMENDMENT 1 : Filestore Management

*Technologies de l'information – Interconnexion de systèmes ouverts (OSI) –
Transfert, accès et gestion de fichiers –*

Partie 4 : Spécification du protocole de fichiers

AMENDEMENT 1 : Gestion du système de fichiers



Reference number
ISO 8571-4:1988/Amd.1:1992 (E)

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Amendment 1 to International Standard ISO 8571-4:1988 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

ISO 8571-4 consists of the following parts, under the general title *Information processing systems – Open Systems Interconnection – File Transfer, Access and Management*

- Part 1 : General introduction
- Part 2 : Virtual Filestore Definition
- Part 3 : File Service Definition
- Part 4 : File Protocol Specification
- Part 5 : Protocol Implementation Conformance Statement Proforma

Information processing systems – Open Systems Interconnection – File Transfer, Access and Management –

Part 4 : File Protocol Specification

AMENDMENT 1 : Filestore Management

NOTE – This amendment has additional subclauses and tables to ISO 8571 which are indicated by the use of lower case Roman letters beginning with "a" and imply ordering alphabetically, following the clause with the same numerical value in ISO 8571. These and all subsequent subclauses, tables, and cross references will be renumbered in subsequent editions.

0 Introduction

(amend 3rd paragraph, page 1)

ISO 8571 defines services for file transfer, access and management. It also specifies a protocol available within the application layer of the Reference Model. The service defined is of the category Application Service Element (ASE). It is concerned with identifiable bodies of information which can be treated as files, stored and managed within open systems, or passed between application processes.

(amend 4th paragraph, page 1)

ISO 8571 defines a basic file service. It provides sufficient facilities to support file transfer, file access, and management of files stored on open systems. ISO 8571 does not specify the interfaces to a file transfer, access or management facility within the local system.

(append after subclause 8.2, page 8)

NOTE – This amendment adds the following file initiating entity actions. The detailed actions are listed below and detailed in the state table (Annex A).

8.2a Group Selection (Group Manipulation)

The initiating entity actions for Group Selection are described in Annex a.

8.2b Change Current Name Prefix (Limited Filestore Management)

The initiating entity actions for Change Current Name Prefix are described in Annex a.

8.2c List File Directory (Limited Filestore Management)

The initiating entity actions for List File Directory are described in Annex a.

8.2d Group Deletion (Group Manipulation)

The initiating entity actions for Group Deletion are described in Annex a.

8.2e Group Move (Group Manipulation)

The initiating entity actions for Group Move are described in Annex a.

8.2f Group Copy (Group Manipulation)

The initiating entity actions for Group Copy are described in Annex a.

8.2g Group List (Group Manipulation)

The initiating entity actions for Group List are described in Annex a.

8.2h Group Change Attributes (Enhanced Filestore Management)

The initiating entity actions for Group Change Attributes are described in Annex a.

8.2i Select-Another Object (group Manipulation)

The initiating entity actions for Select-Another Object are described in Annex a.

8.2j Move Object (Object Manipulation)

The initiating entity actions for Move Object are described in Annex a.

8.2k Copy Object (Object Manipulation)

The initiating entity actions for Copy Object are described in Annex a.

8.2l File-Directory Creation (Enhanced Filestore Management)

The initiating entity actions for File-Directory Creation are described in Annex a.

8.2m Reference Creation (Enhanced Filestore Management)

The initiating entity actions for Reference Creation are described in Annex a.

8.2n Reference Deletion (Enhanced Filestore Management)

The initiating entity actions for Reference Deletion are described in Annex a.

8.2o Read Reference Attributes (Enhanced Filestore Management)

The initiating entity actions for Read Reference Attributes are described in Annex a.

8.2p Change Reference Attributes (Enhanced Filestore Management)

The initiating entity actions for Change Reference Attributes are described in Annex a.

(append after subclause 9.2, page 15)

NOTE – This amendment adds the following file responding entity actions. The detailed actions are listed below and detailed in the state table (Annex A).

9.2a Group Selection (Group Manipulation)

The responding entity actions for Group Selection are described in Annex a.

9.2b Change Current Name Prefix (Limited Filestore Management)

The responding entity actions for Change Current Name Prefix are described in Annex a.

9.2c List File Directory (Limited Filestore Management)

The responding entity actions for List File Directory are described in Annex a.

9.2d Group Deletion (Group Manipulation)

The responding entity actions for Group Deletion are described in Annex a.

9.2e Group Move (Group Manipulation)

The responding entity actions for Group Move are described in Annex a.

9.2f Group Copy (Group Manipulation)

The responding entity actions for Group Copy are described in Annex a.

9.2g Group List (Group Manipulation)

The responding entity actions for Group List are described in Annex a.

9.2h Group Change Attributes (Enhanced Filestore Management)

The responding entity actions for Group Change Attributes are described in Annex a.

9.2i Select-Another Object (Group Manipulation)

The responding entity actions for Select-Another Object are described in Annex a.

9.2j Move Object (Object Manipulation)

The responding entity actions for Move Object are described in Annex a.

9.2k Copy Object (Object Manipulation)

The responding entity actions for Copy Object are described in Annex a.

9.2l File-Directory Creation (Enhanced Filestore Management)

The responding entity actions for File-Directory Creation are described in Annex a.

9.2m Reference Creation (Enhanced Filestore Management)

The responding entity actions for Reference Creation are described in Annex a.

9.2n Reference Deletion (Enhanced Filestore Management)

The responding entity actions for Reference Deletion are described in Annex a.

9.2o Read Reference Attributes (Enhanced Filestore Management)

The responding entity actions for Read Reference Attributes are described in Annex a.

9.2p Change Reference Attributes (Enhanced Filestore Management)

The responding entity actions for Change Reference Attributes are described in Annex a.

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/Amd.1:1992

Section five: Abstract Syntax

20.3 ASN.1 Module Definition

(amend Figure 7, page 33)

```

1
2
3 ISO8571-FTAM DEFINITIONS ::=
4 BEGIN
5   PDU ::= CHOICE { FTAM-Regime-PDU, File-PDU, Bulk-Data-PDU, FSM-PDU }
6
7   FTAM-Regime-PDU ::= CHOICE {
8     f-initialize-request      [0] IMPLICIT F-INITIALIZE-request,
9     f-initialize-response     [1] IMPLICIT F-INITIALIZE-response,
10    f-terminate-request       [2] IMPLICIT F-TERMINATE-request,
11    f-terminate-response      [3] IMPLICIT F-TERMINATE-response,
12    f-u-abort-request          [4] IMPLICIT F-U-ABORT-request,
13    f-p-abort-request          [5] IMPLICIT F-P-ABORT-request }
14
15   F-INITIALIZE-request ::= SEQUENCE {
16     protocol-version           Protocol-Version DEFAULT { version-1 },
17     implementation-information Implementation-Information OPTIONAL,
18     presentation-context-management [2] IMPLICIT BOOLEAN DEFAULT FALSE,
19     service-class              Service-Class DEFAULT { transfer-class },
20     -- Only the valid combinations as specified in ISO 8571-3 are allowed.
21     functional-units           Functional-Units,
22     attribute-groups           Attribute-Groups DEFAULT {},
23     shared-ASE-information     Shared-ASE-Information OPTIONAL,
24     ftam-quality-of-service    FTAM-Quality-of-Service,
25     contents-type-list         Contents-Type-List OPTIONAL,
26     initiator-identity         User-Identity OPTIONAL,
27     account                    Account OPTIONAL,
28     filestore-password         Password OPTIONAL,
29     checkpoint-window          [8] IMPLICIT INTEGER DEFAULT 1 }
30     -- If the recovery or restart data transfer functional units are
31     -- not available, the checkpoint-window parameter shall not be sent.
32
33   F-INITIALIZE-response ::= SEQUENCE {
34     state-result               State-Result DEFAULT success,
35     action-result              Action-Result DEFAULT success,
36     protocol-version           Protocol-Version DEFAULT { version-1 },
37     implementation-information Implementation-Information OPTIONAL,
38     presentation-context-management [2] IMPLICIT BOOLEAN DEFAULT FALSE,
39     service-class              Service-Class DEFAULT { transfer-class },
40     -- Only the valid combinations as specified in ISO 8571-3 are allowed.
41     functional-units           Functional-Units,
42     attribute-groups           Attribute-Groups DEFAULT {},
43     shared-ASE-information     Shared-ASE-Information OPTIONAL,
44     ftam-quality-of-service    FTAM-Quality-of-Service,
45     contents-type-list         Contents-Type-List OPTIONAL,

```

46 diagnostic Diagnostic OPTIONAL,
 47 checkpoint-window [8] IMPLICIT INTEGER DEFAULT 1 }
 48 -- If the recovery or restart data transfer functional units are
 49 -- not available, the checkpoint-window parameter shall not be sent.
 50
 51 Protocol-Version ::= [0] IMPLICIT BIT STRING
 52 { version-1 (0),
 53 version-2 (1) }
 54
 55 Implementation-Information ::= [1] IMPLICIT GraphicString
 56 -- This parameter is provided solely for the convenience of implementors
 57 -- needing to distinguish between implementations of a specific version number
 58 -- of different equipment, it shall not be the subject of conformance test.
 59
 60 Service-Class ::= [3] IMPLICIT BIT STRING
 61 { unconstrained-class (0),
 62 management-class (1),
 63 transfer-class (2),
 64 transfer-and-management-class (3),
 65 access-class (4) }
 66
 67 Functional-Units ::= [4] IMPLICIT BIT STRING
 68 { read (2),
 69 write (3),
 70 file-access (4),
 71 limited-file-management (5),
 72 enhanced-file-management (6),
 73 grouping (7),
 74 fadu-locking (8),
 75 recovery (9),
 76 restart-data-transfer (10),
 77 limited-filestore-management (11),
 78 enhanced-filestore-management (12),
 79 object-manipulation (13),
 80 group-manipulation (14) }
 81 -- Values 2 to 14 are chosen to align with numbering scheme used in ISO 8571-3.
 82
 83 Attribute-Groups ::= [5] IMPLICIT BIT STRING
 84 { storage (0),
 85 security (1),
 86 private (2),
 87 extension (3) }
 88 -- The extension bit is defined if and only if the limited-filestore-management
 89 -- or the group-manipulation functional units are available.
 90
 91 FTAM-Quality-of-Service ::= [6] IMPLICIT INTEGER
 92 { no-recovery (0),
 93 class-1-recovery (1),
 94 class-2-recovery (2),
 95 class-3-recovery (3) }
 96
 97 Contents-Type-List ::= [7] IMPLICIT SEQUENCE OF CHOICE
 98 { document-type-name Document-Type-Name,
 99 abstract-syntax-name Abstract-Syntax-Name }

100
101 F-TERMINATE-request ::= SEQUENCE {
102 shared-ASE-information Shared-ASE-Information OPTIONAL }
103
104 F-TERMINATE-response ::= SEQUENCE {
105 shared-ASE-information Shared-ASE-Information OPTIONAL,
106 charging Charging OPTIONAL }
107
108 F-U-ABORT-request ::= SEQUENCE {
109 action-result Action-Result DEFAULT success,
110 diagnostic Diagnostic OPTIONAL }
111
112 F-P-ABORT-request ::= SEQUENCE {
113 action-result Action-Result DEFAULT success,
114 diagnostic Diagnostic OPTIONAL }
115
116 File-PDU ::= CHOICE {
117 f-select-request [6] IMPLICIT F-SELECT-request,
118 f-select-response [7] IMPLICIT F-SELECT-response,
119 f-deselect-request [8] IMPLICIT F-DESELECT-request,
120 f-deselect-response [9] IMPLICIT F-DESELECT-response,
121 f-create-request [10] IMPLICIT F-CREATE-request,
122 f-create-response [11] IMPLICIT F-CREATE-response,
123 f-delete-request [12] IMPLICIT F-DELETE-request,
124 f-delete-response [13] IMPLICIT F-DELETE-response,
125 f-read-attrib-request [14] IMPLICIT F-READ-ATTRIB-request,
126 f-read-attrib-response [15] IMPLICIT F-READ-ATTRIB-response,
127 f-change-attrib-request [16] IMPLICIT F-CHANGE-ATTRIB-request,
128 f-change-attrib-response [17] IMPLICIT F-CHANGE-ATTRIB-response,
129 f-open-request [18] IMPLICIT F-OPEN-request,
130 f-open-response [19] IMPLICIT F-OPEN-response,
131 f-close-request [20] IMPLICIT F-CLOSE-request,
132 f-close-response [21] IMPLICIT F-CLOSE-response,
133 f-begin-group-request [22] IMPLICIT F-BEGIN-GROUP-request,
134 f-begin-group-response [23] IMPLICIT F-BEGIN-GROUP-response,
135 f-end-group-request [24] IMPLICIT F-END-GROUP-request,
136 f-end-group-response [25] IMPLICIT F-END-GROUP-response,
137 f-recover-request [26] IMPLICIT F-RECOVER-request,
138 f-recover-response [27] IMPLICIT F-RECOVER-response,
139 f-locate-request [28] IMPLICIT F-LOCATE-request,
140 f-locate-response [29] IMPLICIT F-LOCATE-response,
141 f-erase-request [30] IMPLICIT F-ERASE-request,
142 f-erase-response [31] IMPLICIT F-ERASE-response }
143
144 F-SELECT-request ::= SEQUENCE {
145 attributes Select-Attributes,
146 requested-access Access-Request,
147 access-passwords Access-Passwords OPTIONAL,
148 path-access-passwords Path-Access-Passwords OPTIONAL,
149 -- This parameter can only be sent when the
150 -- limited-filesystem-management or the object-manipulation or
151 -- the group-manipulation functional units are available.
152 concurrency-control Concurrency-Control OPTIONAL,
153 shared-ASE-information Shared-ASE-Information OPTIONAL,

154 account Account OPTIONAL }
 155
 156 F-SELECT-response ::= SEQUENCE {
 157 state-result State-Result DEFAULT success,
 158 action-result Action-Result DEFAULT success,
 159 attributes Select-Attributes,
 160 referent-indicator Referent-Indicator OPTIONAL,
 161 -- This parameter can only be sent when the
 162 -- limited-filestore-management functional unit is available.
 163 shared-ASE-information Shared-ASE-Information OPTIONAL,
 164 diagnostic Diagnostic OPTIONAL }
 165
 166 F-DESELECT-request ::= SEQUENCE {
 167 shared-ASE-information Shared-ASE-Information OPTIONAL }
 168
 169 F-DESELECT-response ::= SEQUENCE {
 170 action-result Action-Result DEFAULT success,
 171 charging Charging OPTIONAL,
 172 -- Present if and only if the account field was present on
 173 -- the PDU which established the selection regime.
 174 shared-ASE-information Shared-ASE-Information OPTIONAL,
 175 diagnostic Diagnostic OPTIONAL }
 176
 177 F-CREATE-request ::= SEQUENCE {
 178 override [0] IMPLICIT Override DEFAULT create-failure,
 179 initial-attributes Create-Attributes,
 180 create-password Password OPTIONAL,
 181 requested-access Access-Request,
 182 access-passwords Access-Passwords OPTIONAL,
 183 path-access-passwords Path-Access-Passwords OPTIONAL,
 184 -- This parameter can only be sent when the
 185 -- limited-filestore-management or the object-manipulation or
 186 -- the group-manipulation functional units are available.
 187 concurrency-control Concurrency-Control OPTIONAL,
 188 shared-ASE-information Shared-ASE-Information OPTIONAL,
 189 account Account OPTIONAL }
 190
 191 F-CREATE-response ::= SEQUENCE {
 192 state-result State-Result DEFAULT success,
 193 action-result Action-Result DEFAULT success,
 194 initial-attributes Create-Attributes,
 195 shared-ASE-information Shared-ASE-Information OPTIONAL,
 196 diagnostic Diagnostic OPTIONAL }
 197
 198 F-DELETE-request ::= SEQUENCE {
 199 shared-ASE-information Shared-ASE-Information OPTIONAL }
 200
 201 F-DELETE-response ::= SEQUENCE {
 202 action-result Action-Result DEFAULT success,
 203 shared-ASE-information Shared-ASE-Information OPTIONAL,
 204 charging Charging OPTIONAL,
 205 diagnostic Diagnostic OPTIONAL }
 206
 207 F-READ-ATTRIB-request ::= SEQUENCE {

208 attribute-names [0] IMPLICIT Attribute-Names,
 209 attribute-extension-names [1] IMPLICIT Attribute-Extension-Names
 210 OPTIONAL }
 211 -- This parameter can only be sent when the
 212 -- limited-filestore-management functional unit is available.
 213
 214 F-READ-ATTRIB-response ::= SEQUENCE {
 215 action-result Action-Result DEFAULT success,
 216 attributes Read-Attributes OPTIONAL,
 217 -- Password values within the access control can not be read by means
 218 -- of the read attribute action. Whether other parts of the access
 219 -- control object attribute can be read by means of the read
 220 -- attribute action is decided locally by the responding entity, and
 221 -- it shall not be the subject of conformance test.
 222 diagnostic Diagnostic OPTIONAL }
 223
 224 F-CHANGE-ATTRIB-request ::= SEQUENCE {
 225 attributes Change-Attributes }
 226
 227 F-CHANGE-ATTRIB-response ::= SEQUENCE {
 228 action-result Action-Result DEFAULT success,
 229 attributes Change-Attributes OPTIONAL,
 230 -- Password values within access control attribute are never returned.
 231 -- Other attributes are returned as an implementation choice.
 232 diagnostic Diagnostic OPTIONAL }
 233
 234 F-OPEN-request ::= SEQUENCE {
 235 processing-mode [0] IMPLICIT BIT STRING
 236 { f-read (0),
 237 f-insert (1),
 238 f-replace (2),
 239 f-extend (3),
 240 f-erase (4) } DEFAULT { f-read },
 241 contents-type [1] CHOICE {
 242 unknown [0] IMPLICIT NULL,
 243 proposed [1] Contents-Type-Attribute },
 244 concurrency-control Concurrency-Control OPTIONAL,
 245 shared-ASE-information Shared-ASE-Information OPTIONAL,
 246 enable-fadu-locking [2] IMPLICIT BOOLEAN DEFAULT FALSE,
 247 -- If the fadu-locking functional unit is not available, the
 248 -- enable-fadu-locking parameter shall not be sent.
 249 activity-identifier Activity-Identifier OPTIONAL,
 250 -- Only used in the recovery functional unit.
 251 recovery-mode [3] IMPLICIT INTEGER
 252 { none (0),
 253 at-start-of-file (1),
 254 at-any-active-checkpoint (2) }
 255 DEFAULT none,
 256 -- If the recovery or restart data transfer functional units are not
 257 -- available, the recovery-mode parameter shall not be sent.
 258 remove-contexts [4] IMPLICIT SET OF Abstract-Syntax-Name OPTIONAL,
 259 define-contexts [5] IMPLICIT SET OF Abstract-Syntax-Name OPTIONAL }
 260
 261 F-OPEN-response ::= SEQUENCE {

262 state-result State-Result DEFAULT success,
 263 action-result Action-Result DEFAULT success,
 264 contents-type [1] Contents-Type-Attribute,
 265 concurrency-control Concurrency-Control OPTIONAL,
 266 shared-ASE-information Shared-ASE-Information OPTIONAL,
 267 diagnostic Diagnostic OPTIONAL,
 268 recovery-mode [3] IMPLICIT INTEGER
 269 { none (0),
 270 at-start-of-file (1),
 271 at-any-active-checkpoint (2) }
 272 DEFAULT none,
 273 -- If the recovery or restart data transfer functional units are not
 274 -- available, the recovery-mode parameter shall not be sent.
 275 presentation-action [6] IMPLICIT BOOLEAN DEFAULT FALSE }
 276 -- This flag is set if the responder is going to follow this response
 277 -- by a P-ALTER-CONTEXT exchange.
 278
 279 F-CLOSE-request ::= SEQUENCE {
 280 action-result Action-Result DEFAULT success,
 281 shared-ASE-information Shared-ASE-Information OPTIONAL,
 282 diagnostic Diagnostic OPTIONAL }
 283
 284 F-CLOSE-response ::= SEQUENCE {
 285 action-result Action-Result DEFAULT success,
 286 shared-ASE-information Shared-ASE-Information OPTIONAL,
 287 diagnostic Diagnostic OPTIONAL }
 288
 289 F-BEGIN-GROUP-request ::= SEQUENCE {
 290 threshold [0] IMPLICIT INTEGER }
 291
 292 F-BEGIN-GROUP-response ::= SEQUENCE { }
 293 -- No elements defined, shall be empty.
 294
 295 F-END-GROUP-request ::= SEQUENCE { }
 296 -- No elements defined, shall be empty.
 297
 298 F-END-GROUP-response ::= SEQUENCE { }
 299 -- No elements defined, shall be empty.
 300
 301 F-RECOVER-request ::= SEQUENCE {
 302 activity-identifier Activity-Identifier,
 303 bulk-transfer-number [0] IMPLICIT INTEGER,
 304 requested-access Access-Request,
 305 access-passwords Access-Passwords OPTIONAL,
 306 path-access-passwords Path-Access-Passwords OPTIONAL,
 307 -- This parameter can only be sent when the
 308 -- limited-filesystem-management or the object-manipulation or
 309 -- the group-manipulation functional units are available.
 310 recovery-point [2] IMPLICIT INTEGER DEFAULT 0,
 311 -- Zero indicates beginning of file
 312 -- Point after last checkpoint indicates end of file
 313 -- The recovery-point parameter shall only be sent by the entity that
 314 -- was receiving data at the time of failure.
 315 remove-contexts [3] IMPLICIT SET OF Abstract-Syntax-Name OPTIONAL,

316 define-contexts [4] IMPLICIT SET OF Abstract-Syntax-Name OPTIONAL }

317

318 F-RECOVER-response ::= SEQUENCE {

319 state-result State-Result DEFAULT success,

320 action-result Action-Result DEFAULT success,

321 contents-type [1] Contents-Type-Attribute,

322 recovery-point [2] IMPLICIT INTEGER DEFAULT 0,

323 -- Zero indicates beginning of file.

324 -- Point after last checkpoint indicates end of file.

325 -- The recovery-point parameter shall only be sent by the entity that

326 -- was receiving data at the time of failure.

327 diagnostic Diagnostic OPTIONAL,

328 presentation-action [6] IMPLICIT BOOLEAN DEFAULT FALSE }

329 -- This flag is set if the responder is going to follow this response

330 -- by a P-ALTER-CONTEXT exchange.

331

332 F-LOCATE-request ::= SEQUENCE {

333 file-access-data-unit-identity FADU-Identity,

334 fadu-lock FADU-Lock OPTIONAL }

335

336 F-LOCATE-response ::= SEQUENCE {

337 action-result Action-Result DEFAULT success,

338 file-access-data-unit-identity FADU-Identity OPTIONAL,

339 diagnostic Diagnostic OPTIONAL }

340

341 F-ERASE-request ::= SEQUENCE {

342 file-access-data-unit-identity FADU-Identity }

343

344 F-ERASE-response ::= SEQUENCE {

345 action-result Action-Result DEFAULT success,

346 diagnostic Diagnostic OPTIONAL }

347

348 Bulk-Data-PDU ::= CHOICE {

349 f-read-request [32] IMPLICIT F-READ-request,

350 f-write-request [33] IMPLICIT F-WRITE-request,

351 -- There is no F-DATA FPDU, the contents of a file

352 -- are transferred in a different presentation context

353 -- and there is therefore no need to define the types

354 -- of file contents in the FTAM PCI abstract syntax.

355 -- File contents data are carried in values of the

356 -- data type Data-Element as defined in ISO 8571-2.

357 f-data-end-request [34] IMPLICIT F-DATA-END-request,

358 f-transfer-end-request [35] IMPLICIT F-TRANSFER-END-request,

359 f-transfer-end-response [36] IMPLICIT F-TRANSFER-END-response,

360 f-cancel-request [37] IMPLICIT F-CANCEL-request,

361 f-cancel-response [38] IMPLICIT F-CANCEL-response,

362 -- There is no F-CHECK PDU.

363 f-restart-request [39] IMPLICIT F-RESTART-request,

364 f-restart-response [40] IMPLICIT F-RESTART-response }

365

366 F-READ-request ::= SEQUENCE {

367 file-access-data-unit-identity FADU-Identity,

368 access-context Access-Context,

369 fadu-lock FADU-Lock OPTIONAL }

370
371 F-WRITE-request ::= SEQUENCE {
372 file-access-data-unit-operation [0] IMPLICIT INTEGER
373 { insert (0),
374 replace (1),
375 extend (2) },
376 file-access-data-unit-identity FADU-Identity,
377 fadu-lock FADU-Lock OPTIONAL }
378
379 F-DATA-END-request ::= SEQUENCE {
380 action-result Action-Result DEFAULT success,
381 diagnostic Diagnostic OPTIONAL }
382
383 F-TRANSFER-END-request ::= SEQUENCE {
384 shared-ASE-information Shared-ASE-Information OPTIONAL }
385
386 F-TRANSFER-END-response ::= SEQUENCE {
387 action-result Action-Result DEFAULT success,
388 shared-ASE-information Shared-ASE-Information OPTIONAL,
389 diagnostic Diagnostic OPTIONAL }
390
391 F-CANCEL-request ::= SEQUENCE {
392 action-result Action-Result DEFAULT success,
393 shared-ASE-information Shared-ASE-Information OPTIONAL,
394 diagnostic Diagnostic OPTIONAL }
395
396 F-CANCEL-response ::= SEQUENCE {
397 action-result Action-Result DEFAULT success,
398 shared-ASE-information Shared-ASE-Information OPTIONAL,
399 diagnostic Diagnostic OPTIONAL }
400
401 F-RESTART-request ::= SEQUENCE {
402 checkpoint-identifier [0] IMPLICIT INTEGER }
403
404 F-RESTART-response ::= SEQUENCE {
405 checkpoint-identifier [0] IMPLICIT INTEGER }
406
407 Abstract-Syntax-Name ::= [APPLICATION 0] IMPLICIT OBJECT IDENTIFIER
408
409 Access-Context ::= [APPLICATION 1] IMPLICIT SEQUENCE {
410 access-context [0] IMPLICIT INTEGER
411 { hierarchical-all-data-units (0), -- HA
412 hierarchical-no-data-units (1), -- HN
413 flat-all-data-units (2), -- FA
414 flat-one-level-data-units (3), -- FL
415 flat-single-data-unit (4), -- FS
416 unstructured-all-data-units (5), -- UA
417 unstructured-single-data-unit (6) }, -- US
418 level-number [1] IMPLICIT INTEGER OPTIONAL }
419 -- Present if and only if flat-one-level-data-units
420 -- (access context FL) is selected.
421 -- As defined in ISO 8571-2.
422
423 Access-Passwords ::= [APPLICATION 2] IMPLICIT SEQUENCE {

424 read-password [0] IMPLICIT Password,
 425 insert-password [1] IMPLICIT Password,
 426 replace-password [2] IMPLICIT Password,
 427 extend-password [3] IMPLICIT Password,
 428 erase-password [4] IMPLICIT Password,
 429 read-attribute-password [5] IMPLICIT Password,
 430 change-attribute-password [6] IMPLICIT Password,
 431 delete-password [7] IMPLICIT Password,
 432 pass-passwords [8] IMPLICIT Pass-Passwords OPTIONAL,
 433 link-password [9] IMPLICIT Password OPTIONAL }
 434 -- The pass-passwords and the link-password must be included in the
 435 -- access-passwords if and only if the limited-filestore-management
 436 -- or the object-manipulation or the group-manipulation functional
 437 -- units are available.
 438
 439 Access-Request ::= [APPLICATION 3] IMPLICIT BIT STRING
 440 { read (0),
 441 insert (1),
 442 replace (2),
 443 extend (3),
 444 erase (4),
 445 read-attribute (5),
 446 change-attribute (6),
 447 delete-object (7) }
 448
 449 Account ::= [APPLICATION 4] IMPLICIT GraphicString
 450
 451 Action-Result ::= [APPLICATION 5] IMPLICIT INTEGER
 452 { success (0),
 453 transient-error (1),
 454 permanent-error (2) }
 455
 456 Activity-Identifier ::= [APPLICATION 6] IMPLICIT INTEGER
 457
 458 Application-Entity-Title ::= [APPLICATION 7] ACSE-1.AE-title
 459 -- As defined in ISO 8650.
 460
 461 Change-Attributes ::= [APPLICATION 8] IMPLICIT SEQUENCE {
 462 -- Kernel Group
 463 pathname Pathname-Attribute OPTIONAL,
 464 -- Storage group
 465 storage-account [3] Account-Attribute OPTIONAL,
 466 object-availability [12] Object-Availability-Attribute OPTIONAL,
 467 future-object-size [14] Object-Size-Attribute OPTIONAL,
 468 -- Security group
 469 access-control [15] Access-Control-Change-Attribute OPTIONAL,
 470 path-access-control [21] Access-Control-Change-Attribute OPTIONAL,
 471 -- This parameter can only be sent when the
 472 -- enhanced-filestore-management functional unit is available.
 473 legal-qualification [16] Legal-Qualification-Attribute OPTIONAL,
 474 -- Private group
 475 private-use [17] Private-Use-Attribute OPTIONAL,
 476 -- Attribute Extensions group
 477 attribute-extensions [22] IMPLICIT Attribute-Extensions OPTIONAL }

478 -- This parameter can only be sent when the
 479 -- enhanced-filestore-management functional unit is available.
 480 -- At least one attribute shall be present in the Change-Attributes
 481 -- parameter on the request PDU.
 482
 483 Charging ::= [APPLICATION 9] IMPLICIT SEQUENCE OF SEQUENCE {
 484 resource-identifier [0] IMPLICIT GraphicString,
 485 charging-unit [1] IMPLICIT GraphicString,
 486 charging-value [2] IMPLICIT INTEGER }
 487
 488 Concurrency-Control ::= [APPLICATION 10] IMPLICIT SEQUENCE
 489 { read [0] IMPLICIT Lock,
 490 insert [1] IMPLICIT Lock,
 491 replace [2] IMPLICIT Lock,
 492 extend [3] IMPLICIT Lock,
 493 erase [4] IMPLICIT Lock,
 494 read-attribute [5] IMPLICIT Lock,
 495 change-attribute [6] IMPLICIT Lock,
 496 delete-object [7] IMPLICIT Lock }
 497
 498 Lock ::= INTEGER
 499 { not-required (0),
 500 shared (1),
 501 exclusive (2),
 502 no-access (3) }
 503
 504 Constraint-Set-Name ::= [APPLICATION 11] IMPLICIT OBJECT IDENTIFIER
 505
 506 Create-Attributes ::= [APPLICATION 12] IMPLICIT SEQUENCE {
 507 -- Kernel Group
 508 pathname Pathname-Attribute,
 509 object-type [18] IMPLICIT Object-Type-Attribute DEFAULT file,
 510 -- This parameter can be sent if and only if the
 511 -- limited-filestore-management functional unit is available.
 512 permitted-actions [1] IMPLICIT Permitted-Actions-Attribute,
 513 contents-type [2] Contents-Type-Attribute,
 514 -- Storage group
 515 storage-account [3] Account-Attribute OPTIONAL,
 516 object-availability [12] Object-Availability-Attribute OPTIONAL,
 517 future-object-size [14] Object-Size-Attribute OPTIONAL,
 518 -- Security group
 519 access-control [15] Access-Control-Attribute OPTIONAL,
 520 path-access-control [21] Access-Control-Attribute OPTIONAL,
 521 -- This parameter can be sent if and only if the
 522 -- enhanced-filestore-management functional unit is available.
 523 legal-qualification [16] Legal-Qualification-Attribute OPTIONAL,
 524 -- Private group
 525 private-use [17] Private-Use-Attribute OPTIONAL,
 526 -- Attribute Extensions group
 527 attribute-extensions [22] IMPLICIT Attribute-Extensions OPTIONAL }
 528 -- This parameter can only be sent when the
 529 -- limited-filestore-management functional unit is available.
 530
 531 Diagnostic ::= [APPLICATION 13] IMPLICIT SEQUENCE OF SEQUENCE {

532 diagnostic-type [0] IMPLICIT INTEGER
 533 { informative (0),
 534 transient (1),
 535 permanent (2) },
 536 error-identifier [1] IMPLICIT INTEGER,
 537 -- As defined in ISO 8571-3.
 538 error-observer [2] IMPLICIT Entity-Reference,
 539 error-source [3] IMPLICIT Entity-Reference,
 540 suggested-delay [4] IMPLICIT INTEGER OPTIONAL,
 541 further-details [5] IMPLICIT GraphicString OPTIONAL }
 542
 543 Entity-Reference ::= INTEGER
 544 { no-categorization-possible (0),
 545 initiating-file-service-user (1),
 546 initiating-file-protocol-machine (2),
 547 service-supporting-the-file-protocol-machine (3),
 548 responding-file-protocol-machine (4),
 549 responding-file-service-user (5) }
 550 -- NOTE
 551 -- 1. The values 0 and 3 are only valid as values in error-source.
 552 -- 2. The value 5 corresponds to the virtual filestore.
 553
 554 Document-Type-Name ::= [APPLICATION 14] IMPLICIT OBJECT IDENTIFIER
 555
 556 FADU-Identity ::= [APPLICATION 15] CHOICE {
 557 first-last [0] IMPLICIT INTEGER { first (0), last (1) },
 558 relative [1] IMPLICIT INTEGER { previous (0), current (1), next (2) },
 559 begin-end [2] IMPLICIT INTEGER { begin (0), end (1) },
 560 single-name [3] IMPLICIT Node-Name,
 561 name-list [4] IMPLICIT SEQUENCE OF Node-Name,
 562 fadu-number [5] IMPLICIT INTEGER }
 563 -- As defined in ISO 8571-2.
 564
 565 Node-Name ::= EXTERNAL
 566 -- The type to be used for Node-Name is defined in ISO8571-FADU.
 567
 568 FADU-Lock ::= [APPLICATION 16] IMPLICIT INTEGER
 569 { off (0), on (1) }
 570
 571 Password ::= [APPLICATION 17] CHOICE { GraphicString, OCTET STRING }
 572
 573 Read-Attributes ::= [APPLICATION 18] IMPLICIT SEQUENCE {
 574 -- Kernel Group
 575 pathname Pathname-Attribute OPTIONAL,
 576 object-type [18] IMPLICIT Object-Type-Attribute OPTIONAL,
 577 -- This parameter can be sent if and only if
 578 -- the limited-filestore-management functional unit is available.
 579 permitted-actions [1] IMPLICIT Permitted-Actions-Attribute
 580 OPTIONAL,
 581 contents-type [2] Contents-Type-Attribute OPTIONAL,
 582 linked-object [19] Pathname-Attribute OPTIONAL,
 583 -- This parameter can be sent if and only if
 584 -- the limited-filestore-management functional unit is available.
 585 child-objects [23] Child-Objects-Attribute OPTIONAL,

586 -- This parameter can be sent if and only if
 587 -- the limited-filestore-management functional unit is available.
 588 -- Storage group
 589 primary-pathname [20] Pathname-Attribute OPTIONAL,
 590 storage-account [3] Account-Attribute OPTIONAL,
 591 date-and-time-of-creation [4] Date-and-Time-Attribute OPTIONAL,
 592 date-and-time-of-last-modification [5] Date-and-Time-Attribute OPTIONAL,
 593 date-and-time-of-last-read-access [6] Date-and-Time-Attribute OPTIONAL,
 594 date-and-time-of-last-attribute-modification [7] Date-and-Time-Attribute OPTIONAL,
 595 identity-of-creator [8] User-Identity-Attribute OPTIONAL,
 596 identity-of-last-modifier [9] User-Identity-Attribute OPTIONAL,
 597 identity-of-last-reader [10] User-Identity-Attribute OPTIONAL,
 598 identity-last-attribute-modifier [11] User-Identity-Attribute OPTIONAL,
 599 object-availability [12] Object-Availability-Attribute OPTIONAL,
 600 object-size [13] Object-Size-Attribute OPTIONAL,
 601 future-object-size [14] Object-Size-Attribute OPTIONAL,
 602 -- Security group
 603 access-control [15] Access-Control-Attribute OPTIONAL,
 604 path-access-control [21] Access-Control-Attribute OPTIONAL,
 605 -- This parameter can be sent if and only if
 606 -- the limited-filestore-management functional unit is available.
 607 legal-qualification [16] Legal-Qualification-Attribute OPTIONAL,
 608 -- Private group
 609 private-use [17] Private-Use-Attribute OPTIONAL,
 610 -- Attribute Extensions group
 611 attribute-extensions [22] IMPLICIT Attribute-Extensions OPTIONAL }
 612 -- This parameter can be sent if and only if
 613 -- the limited-filestore-management functional unit is available.
 614 Select-Attributes ::= [APPLICATION 19] IMPLICIT SEQUENCE {
 615 -- Kernel Group
 616 pathname Pathname-Attribute }
 617 Shared-ASE-Information ::= [APPLICATION 20] IMPLICIT EXTERNAL
 618 -- This field may be used to convey commitment control as described
 619 -- in ISO 8571-3.
 620 State-Result ::= [APPLICATION 21] IMPLICIT INTEGER
 621 { success (0),
 622 failure (1) }
 623 User-Identity ::= [APPLICATION 22] IMPLICIT GraphicString
 624 Access-Control-Attribute ::= CHOICE {
 625 no-value-available [0] IMPLICIT NULL,
 626 -- Indicates partial support of this attribute.
 627 -- This value shall only appear in response PDUs.
 628 actual-values [1] IMPLICIT SET OF Access-Control-Element }
 629 -- The semantics of this attribute is described in ISO 8571-2.
 630

640 Access-Control-Change-Attribute ::= CHOICE {
641 no-value-available [0] IMPLICIT NULL,
642 -- Indicates partial support of this attribute.
643 -- This value shall only appear in response PDUs.
644 actual-values [1] IMPLICIT SEQUENCE {
645 insert-values [0] IMPLICIT SET OF Access-Control-Element OPTIONAL,
646 -- This field is used by the change attribute actions to indicate
647 -- new values to be inserted in the access control object attribute.
648 delete-values [1] IMPLICIT SET OF Access-Control-Element OPTIONAL}}
649 -- This field is used by the change attribute action to indicate
650 -- old values to be removed from the access control object
651 -- attribute.
652 -- The semantics of this attribute is described in ISO 8571-2.
653

654 Access-Control-Element ::= SEQUENCE {
655 action-list [0] IMPLICIT Access-Request,
656 concurrency-access [1] IMPLICIT Concurrency-Access OPTIONAL,
657 identity [2] IMPLICIT User-Identity OPTIONAL,
658 passwords [3] IMPLICIT Access-Passwords OPTIONAL,
659 location [4] IMPLICIT Application-Entity-Title OPTIONAL }
660

661 Concurrency-Access ::= SEQUENCE {
662 read [0] IMPLICIT Concurrency-Key,
663 insert [1] IMPLICIT Concurrency-Key,
664 replace [2] IMPLICIT Concurrency-Key,
665 extend [3] IMPLICIT Concurrency-Key,
666 erase [4] IMPLICIT Concurrency-Key,
667 read-attribute [5] IMPLICIT Concurrency-Key,
668 change-attribute [6] IMPLICIT Concurrency-Key,
669 delete-object [7] IMPLICIT Concurrency-Key }
670

671 Concurrency-Key ::= BIT STRING
672 { not-required (0),
673 shared (1),
674 exclusive (2),
675 no-access (3) }
676

677 Account-Attribute ::= CHOICE {
678 no-value-available [0] IMPLICIT NULL,
679 -- Indicates partial support of this attribute.
680 -- This value shall only appear in response PDUs.
681 actual-values Account }
682

683 Contents-Type-Attribute ::= CHOICE {
684 document-type [0] IMPLICIT SEQUENCE {
685 document-type-name Document-Type-Name,
686 parameter [0] ANY OPTIONAL },
687 -- The actual types to be used for values of the parameter field
688 -- are defined in the named document type.
689 constraint-set-and-abstract-syntax [1] IMPLICIT SEQUENCE {
690 constraint-set-name Constraint-Set-Name,
691 abstract-syntax-name Abstract-Syntax-Name } }
692

693 Date-and-Time-Attribute ::= CHOICE {

694 no-value-available [0] IMPLICIT NULL,
 695 -- Indicates partial support of this attribute.
 696 -- This value shall only appear in response PDUs.
 697 actual-values [1] IMPLICIT GeneralizedTime }
 698
 699 Object-Availability-Attribute ::= CHOICE {
 700 no-value-available [0] IMPLICIT NULL,
 701 -- Indicates partial support of this attribute.
 702 -- This value shall only appear in response PDUs.
 703 actual-values [1] IMPLICIT INTEGER
 704 { immediate-availability (0),
 705 deferred-availability (1) } }
 706
 707 Pathname-Attribute ::= CHOICE {
 708 incomplete-pathname [0] IMPLICIT Pathname,
 709 complete-pathname [APPLICATION 23] IMPLICIT Pathname }
 710
 711 Object-Size-Attribute ::= CHOICE {
 712 no-value-available [0] IMPLICIT NULL,
 713 -- Indicates partial support of this attribute.
 714 -- This value shall only appear in response PDUs.
 715 actual-values [1] IMPLICIT INTEGER }
 716
 717 Legal-Qualification-Attribute ::= CHOICE {
 718 no-value-available [0] IMPLICIT NULL,
 719 -- Indicates partial support of this attribute.
 720 -- This value shall only appear in response PDUs.
 721 actual-values [1] IMPLICIT GraphicString }
 722
 723 Permitted-Actions-Attribute ::= BIT STRING
 724 -- Actions available
 725 { read (0),
 726 insert (1),
 727 replace (2),
 728 extend (3),
 729 erase (4),
 730 read-attribute (5),
 731 change-attribute (6),
 732 delete-object (7),
 733 pass (11),
 734 link (12),
 735 -- FADU-Identity groups available
 736 traversal (8),
 737 reverse-traversal (9),
 738 random-order (10) }
 739
 740 Private-Use-Attribute ::= CHOICE {
 741 no-value-available [0] IMPLICIT NULL,
 742 -- Indicates partial support of this attribute.
 743 -- This value shall only appear in response PDUs.
 744 abstract-syntax-not-supported [1] IMPLICIT NULL,
 745 -- Indicates that abstract syntax is not available.
 746 actual-values [2] IMPLICIT EXTERNAL }
 747

748 Object-Type-Attribute ::= INTEGER
 749 { file (0),
 750 file-directory (1),
 751 reference (2) }
 752
 753 User-Identity-Attribute ::= CHOICE {
 754 no-value-available [0] IMPLICIT NULL,
 755 -- Indicates partial support of this attribute.
 756 -- This value shall only appear in response PDUs.
 757 actual-values User-Identity }
 758
 759 Child-Objects-Attribute ::= SET OF GraphicString
 760
 761 FSM-PDU ::= CHOICE {
 762 f-change-prefix-request [41] IMPLICIT F-CHANGE-PREFIX-request,
 763 f-change-prefix-response [42] IMPLICIT F-CHANGE-PREFIX-response,
 764 f-list-request [43] IMPLICIT F-LIST-request,
 765 f-list-response [44] IMPLICIT F-LIST-response,
 766 f-group-select-request [45] IMPLICIT F-GROUP-SELECT-request,
 767 f-group-select-response [46] IMPLICIT F-GROUP-SELECT-response,
 768 f-group-delete-request [47] IMPLICIT F-GROUP-DELETE-request,
 769 f-group-delete-response [48] IMPLICIT F-GROUP-DELETE-response,
 770 f-group-move-request [49] IMPLICIT F-GROUP-MOVE-request,
 771 f-group-move-response [50] IMPLICIT F-GROUP-MOVE-response,
 772 f-group-copy-request [51] IMPLICIT F-GROUP-COPY-request,
 773 f-group-copy-response [52] IMPLICIT F-GROUP-COPY-response,
 774 f-group-list-request [53] IMPLICIT F-GROUP-LIST-request,
 775 f-group-list-response [54] IMPLICIT F-GROUP-LIST-response,
 776 f-group-change-attrib-request [55] IMPLICIT F-GROUP-CHANGE-ATTRIB-request,
 777 f-group-change-attrib-response [56] IMPLICIT F-GROUP-CHANGE-ATTRIB-response,
 778 f-select-another-request [57] IMPLICIT F-SELECT-ANOTHER-request,
 779 f-select-another-response [58] IMPLICIT F-SELECT-ANOTHER-response,
 780 f-create-directory-request [59] IMPLICIT F-CREATE-DIRECTORY-request,
 781 f-create-directory-response [60] IMPLICIT F-CREATE-DIRECTORY-response,
 782 f-link-request [61] IMPLICIT F-LINK-request,
 783 f-link-response [62] IMPLICIT F-LINK-response,
 784 f-unlink-request [63] IMPLICIT F-UNLINK-request,
 785 f-unlink-response [64] IMPLICIT F-UNLINK-response,
 786 f-read-link-attrib-request [65] IMPLICIT F-READ-LINK-ATTRIB-request,
 787 f-read-link-attrib-response [66] IMPLICIT F-READ-LINK-ATTRIB-response,
 788 f-change-link-attrib-request [67] IMPLICIT F-CHANGE-LINK-ATTRIB-request,
 789 f-change-link-attrib-response [68] IMPLICIT F-CHANGE-LINK-ATTRIB-response,
 790 f-move-request [69] IMPLICIT F-MOVE-request,
 791 f-move-response [70] IMPLICIT F-MOVE-response,
 792 f-copy-request [71] IMPLICIT F-COPY-request,
 793 f-copy-response [72] IMPLICIT F-COPY-response }
 794
 795 F-CHANGE-PREFIX-request ::= SEQUENCE {
 796 reset [0] IMPLICIT BOOLEAN DEFAULT FALSE,
 797 destination-file-directory Destination-File-Directory,
 798 access-passwords Access-Passwords OPTIONAL,
 799 path-access-passwords Path-Access-Passwords OPTIONAL }
 800
 801 F-CHANGE-PREFIX-response ::= SEQUENCE {

802	action-result	Action-Result DEFAULT success,
803	destination-file-directory	Destination-File-Directory OPTIONAL,
804	diagnostic	Diagnostic OPTIONAL }
805		
806	F-LIST-request ::= SEQUENCE {	
807	attribute-value-assertions	Attribute-Value-Assertions,
808	scope	Scope,
809	access-passwords	Access-Passwords OPTIONAL,
810	path-access-passwords	Path-Access-Passwords OPTIONAL,
811	attribute-names	[0] IMPLICIT Attribute-Names,
812	attribute-extension-names	[1] IMPLICIT Attribute-Extension-Names
813		OPTIONAL }
814		
815	F-LIST-response ::= SEQUENCE {	
816	action-result	Action-Result DEFAULT success,
817	objects-attributes-list	Objects-Attributes-List OPTIONAL,
818	diagnostic	Diagnostic OPTIONAL }
819		
820	F-GROUP-SELECT-request ::= SEQUENCE {	
821	attribute-value-assertions	Attribute-Value-Assertions,
822	requested-access	Access-Request,
823	access-passwords	Access-Passwords OPTIONAL,
824	path-access-passwords	Path-Access-Passwords OPTIONAL,
825	concurrency-control	Concurrency-Control OPTIONAL,
826	maximum-set-size	[0] IMPLICIT INTEGER DEFAULT 0,
827	-- 0 implies no limit.	
828	scope	Scope,
829	account	Account OPTIONAL,
830	shared-ASE-information	Shared-ASE-Information OPTIONAL }
831		
832	F-GROUP-SELECT-response ::= SEQUENCE {	
833	action-result	Action-Result DEFAULT success,
834	shared-ASE-information	Shared-ASE-Information OPTIONAL,
835	diagnostic	Diagnostic OPTIONAL }
836		
837	F-GROUP-DELETE-request ::= SEQUENCE {	
838	request-operation-result	Request-Operation-Result OPTIONAL,
839	shared-ASE-information	Shared-ASE-Information OPTIONAL }
840		
841	F-GROUP-DELETE-response ::= SEQUENCE {	
842	action-result	Action-Result DEFAULT success,
843	charging	Charging OPTIONAL,
844	operation-result	Operation-Result OPTIONAL,
845	shared-ASE-information	Shared-ASE-Information OPTIONAL,
846	diagnostic	Diagnostic OPTIONAL }
847		
848	F-GROUP-MOVE-request ::= SEQUENCE {	
849	destination-file-directory	Destination-File-Directory,
850	override	[0] IMPLICIT Override DEFAULT create-failure,
851	-- Only the values create-failure (0)	
852	-- and delete-and-create-with-new-attributes (3) are allowed.	
853	error-action	[1] IMPLICIT Error-Action,
854	create-password	Password OPTIONAL,
855	access-passwords	Access-Passwords OPTIONAL,

856 path-access-passwords Path-Access-Passwords OPTIONAL,
857 request-operation-result Request-Operation-Result OPTIONAL,
858 attributes Change-Attributes OPTIONAL }
859
860 F-GROUP-MOVE-response ::= SEQUENCE {
861 action-result Action-Result DEFAULT success,
862 destination-file-directory Destination-File-Directory OPTIONAL,
863 operation-result Operation-Result OPTIONAL,
864 diagnostic Diagnostic OPTIONAL }
865
866 F-GROUP-COPY-request ::= SEQUENCE {
867 destination-file-directory Destination-File-Directory,
868 override [0] IMPLICIT Override DEFAULT create-failure,
869 -- Only the values create-failure (0)
870 -- and delete-and-create-with-new-attributes (3) are allowed.
871 error-action [1] IMPLICIT Error-Action,
872 create-password Password OPTIONAL,
873 access-passwords Access-Passwords OPTIONAL,
874 path-access-passwords Path-Access-Passwords OPTIONAL,
875 request-operation-result Request-Operation-Result OPTIONAL,
876 attributes Change-Attributes OPTIONAL }
877
878 F-GROUP-COPY-response ::= SEQUENCE {
879 action-result Action-Result DEFAULT success,
880 destination-file-directory Destination-File-Directory OPTIONAL,
881 operation-result Operation-Result OPTIONAL,
882 diagnostic Diagnostic OPTIONAL }
883
884 F-GROUP-LIST-request ::= SEQUENCE {
885 attribute-names [0] IMPLICIT Attribute-Names,
886 attribute-extension-names [2] IMPLICIT Attribute-Extension-Names
887 OPTIONAL }
888
889 F-GROUP-LIST-response ::= SEQUENCE {
890 action-result Action-Result DEFAULT success,
891 objects-attributes-list Objects-Attributes-List OPTIONAL,
892 diagnostic Diagnostic OPTIONAL }
893
894 F-GROUP-CHANGE-ATTRIB-request ::= SEQUENCE {
895 attributes Change-Attributes,
896 error-action [1] IMPLICIT Error-Action,
897 request-operation-result Request-Operation-Result OPTIONAL,
898 shared-ASE-information Shared-ASE-Information OPTIONAL }
899
900 F-GROUP-CHANGE-ATTRIB-response ::= SEQUENCE {
901 action-result Action-Result DEFAULT success,
902 operation-result Operation-Result OPTIONAL,
903 shared-ASE-information Shared-ASE-Information OPTIONAL,
904 diagnostic Diagnostic OPTIONAL }
905
906 F-SELECT-ANOTHER-request ::= SEQUENCE {
907 shared-ASE-information Shared-ASE-Information OPTIONAL }
908
909 F-SELECT-ANOTHER-response ::= SEQUENCE {

910	state-result	State-Result DEFAULT success,
911	action-result	Action-Result DEFAULT success,
912	last-member-indicator	[0] IMPLICIT BOOLEAN DEFAULT FALSE,
913	referent-indicator	Referent-Indicator OPTIONAL,
914	shared-ASE-information	Shared-ASE-Information OPTIONAL,
915	diagnostic	Diagnostic OPTIONAL }
916		
917	F-CREATE-DIRECTORY-request ::= SEQUENCE {	
918	initial-attributes	Create-Attributes,
919	create-password	Password OPTIONAL,
920	requested-access	Access-Request,
921	shared-ASE-information	Shared-ASE-Information OPTIONAL,
922	account	Account OPTIONAL }
923		
924	F-CREATE-DIRECTORY-response ::= SEQUENCE {	
925	state-result	State-Result DEFAULT success,
926	action-result	Action-Result DEFAULT success,
927	initial-attributes	Create-Attributes,
928	shared-ASE-information	Shared-ASE-Information OPTIONAL,
929	diagnostic	Diagnostic OPTIONAL }
930		
931	F-LINK-request ::= SEQUENCE {	
932	initial-attributes	Create-Attributes,
933	target-object	Pathname-Attribute,
934	create-password	Password OPTIONAL,
935	requested-access	Access-Request,
936	access-passwords	Access-Passwords OPTIONAL,
937	path-access-passwords	Path-Access-Passwords OPTIONAL,
938	concurrency-control	Concurrency-Control OPTIONAL,
939	shared-ASE-information	Shared-ASE-Information OPTIONAL,
940	account	Account OPTIONAL }
941		
942	F-LINK-response ::= SEQUENCE {	
943	state-result	State-Result DEFAULT success,
944	action-result	Action-Result DEFAULT success,
945	initial-attributes	Create-Attributes,
946	target-object	Pathname-Attribute,
947	shared-ASE-information	Shared-ASE-Information OPTIONAL,
948	diagnostic	Diagnostic OPTIONAL }
949		
950	F-UNLINK-request ::= SEQUENCE {	
951	shared-ASE-information	Shared-ASE-Information OPTIONAL }
952		
953	F-UNLINK-response ::= SEQUENCE {	
954	action-result	Action-Result DEFAULT success,
955	shared-ASE-information	Shared-ASE-Information OPTIONAL,
956	charging	Charging OPTIONAL,
957	diagnostic	Diagnostic OPTIONAL }
958		
959	F-READ-LINK-ATTRIB-request ::= SEQUENCE {	
960	attribute-names	[0] IMPLICIT Attribute-Names,
961	attribute-extension-names	[1] IMPLICIT Attribute-Extension-Names
962		OPTIONAL }
963		

964 F-READ-LINK-ATTRIB-response ::= SEQUENCE {
 965 action-result Action-Result DEFAULT success,
 966 attributes Read-Attributes OPTIONAL,
 967 diagnostic Diagnostic OPTIONAL }
 968
 969 F-CHANGE-LINK-ATTRIB-request ::= SEQUENCE {
 970 attributes Change-Attributes }
 971
 972 F-CHANGE-LINK-ATTRIB-response ::= SEQUENCE {
 973 action-result Action-Result DEFAULT success,
 974 attributes Change-Attributes OPTIONAL,
 975 diagnostic Diagnostic OPTIONAL }
 976
 977 F-MOVE-request ::= SEQUENCE {
 978 destination-file-directory Destination-File-Directory,
 979 override [0] IMPLICIT Override DEFAULT create-failure,
 980 -- Only the values create-failure (0)
 981 -- and delete-and-create-with-new-attributes (3) are allowed.
 982 create-password Password OPTIONAL,
 983 access-passwords Access-Passwords OPTIONAL,
 984 path-access-passwords Path-Access-Passwords OPTIONAL,
 985 attributes Change-Attributes OPTIONAL }
 986
 987 F-MOVE-response ::= SEQUENCE {
 988 action-result Action-Result DEFAULT success,
 989 destination-file-directory Destination-File-Directory OPTIONAL,
 990 attributes Change-Attributes OPTIONAL,
 991 diagnostic Diagnostic OPTIONAL }
 992
 993 F-COPY-request ::= SEQUENCE {
 994 destination-file-directory Destination-File-Directory,
 995 override [0] IMPLICIT Override DEFAULT create-failure,
 996 -- Only the values create-failure (0)
 997 -- and delete-and-create-with-new-attributes (3) are allowed.
 998 create-password Password OPTIONAL,
 999 access-passwords Access-Passwords OPTIONAL,
 1000 path-access-passwords Path-Access-Passwords OPTIONAL,
 1001 attributes Change-Attributes OPTIONAL }
 1002
 1003 F-COPY-response ::= SEQUENCE {
 1004 action-result Action-Result DEFAULT success,
 1005 destination-file-directory Destination-File-Directory OPTIONAL,
 1006 attributes Change-Attributes OPTIONAL,
 1007 diagnostic Diagnostic OPTIONAL }
 1008
 1009 Attribute-Extension-Names ::= SEQUENCE OF Attribute-Extension-Set-Name
 1010
 1011 Attribute-Extension-Set-Name ::= SEQUENCE {
 1012 extension-set-identifier [0] IMPLICIT Extension-Set-Identifier,
 1013 extension-attribute-names [1] SEQUENCE OF Extension-Attribute-Identifier }
 1014
 1015 Attribute-Extensions ::= SEQUENCE OF Attribute-Extension-Set
 1016
 1017 Attribute-Extension-Set ::= SEQUENCE {

1018 extension-set-identifier [0] IMPLICIT Extension-Set-Identifier,
 1019 extension-set-attributes [1] SEQUENCE OF Extension-Attribute }
 1020
 1021 Extension-Attribute ::= SEQUENCE {
 1022 extension-attribute-identifier Extension-Attribute-Identifier,
 1023 extension-attribute ANY DEFINED BY extension-attribute-identifier }
 1024
 1025 Extension-Set-Identifier ::= OBJECT IDENTIFIER
 1026
 1027 Extension-Attribute-Identifier ::= OBJECT IDENTIFIER
 1028
 1029 Attribute-Value-Assertions ::= [APPLICATION 26] IMPLICIT OR-Set
 1030
 1031 Scope ::= [APPLICATION 28] IMPLICIT SEQUENCE OF SEQUENCE {
 1032 root-directory [0] Pathname-Attribute OPTIONAL,
 1033 retrieval-scope [1] IMPLICIT INTEGER {child (0), all (1)} }
 1034
 1035 OR-Set ::= SEQUENCE OF AND-Set
 1036
 1037 AND-Set ::= SEQUENCE OF CHOICE {
 1038 -- Kernel group
 1039 pathname-pattern [0] IMPLICIT Pathname-Pattern,
 1040 object-type-pattern [18] IMPLICIT Integer-Pattern,
 1041 permitted-actions-pattern [1] IMPLICIT Bitstring-Pattern,
 1042 contents-type-pattern [2] Contents-Type-Pattern,
 1043 linked-object-pattern [19] IMPLICIT Pathname-Pattern,
 1044 child-objects-pattern [23] IMPLICIT Pathname-Pattern,
 1045 -- Storage group
 1046 primary-pathname-pattern [20] IMPLICIT Pathname-Pattern,
 1047 storage-account-pattern [3] IMPLICIT String-Pattern,
 1048 date-and-time-of-creation-pattern [4] IMPLICIT Date-and-Time-Pattern,
 1049 date-and-time-of-last-modification-pattern [5] IMPLICIT Date-and-Time-Pattern,
 1050 date-and-time-of-last-read-access-pattern [6] IMPLICIT Date-and-Time-Pattern,
 1051 date-and-time-of-last-attribute-modification-pattern [7] IMPLICIT Date-and-Time-Pattern,
 1052 identity-of-creator-pattern [8] IMPLICIT User-Identity-Pattern,
 1053 identity-of-last-modifier-pattern [9] IMPLICIT User-Identity-Pattern,
 1054 identity-of-last-reader-pattern [10] IMPLICIT User-Identity-Pattern,
 1055 identity-of-last-attribute-modifier-pattern [11] IMPLICIT User-Identity-Pattern,
 1056 object-availability-pattern [12] IMPLICIT Boolean-Pattern,
 1057 object-size-pattern [13] IMPLICIT Integer-Pattern,
 1058 future-object-size-pattern [14] IMPLICIT Integer-Pattern,
 1059 -- Security group
 1060 -- Access control searches are disallowed.
 1061 legal-qualification-pattern [16] IMPLICIT String-Pattern,
 1062 -- Private group
 1063 -- Private use searches are disallowed.
 1064 -- Attribute Extensions group
 1065 attribute-extensions-pattern [22] IMPLICIT Attribute-Extensions-Pattern }

1072

1073 User-Identity-Pattern ::= String-Pattern

1074

1075 Equality-Comparison ::= BIT STRING

1076 { no-value-available-matches (0),

1077 -- Set implies "No Value Available" matches the test.

1078 -- Clear implies "No Value Available" fails the test.

1079 equals-matches (1)

1080 -- Set implies equal items match the test.

1081 -- Clear implies equal items fail the test.

1082 }

1083

1084 Relational-Comparison ::= BIT STRING

1085 { no-value-available-matches (0),

1086 -- Set implies "No Value Available" matches the test.

1087 -- Clear implies "No Value Available" fails the test.

1088 equals-matches (1),

1089 -- Set implies equal items match the test.

1090 -- Clear implies equal items fail the test.

1091 less-than-matches (2),

1092 -- Set implies a value less than the test case matches.

1093 -- Clear implies a value less than the test case fails.

1094 greater-than-matches (3)

1095 -- Set implies a value greater than the test case matches.

1096 -- Clear implies a value greater than the test case fails.

1097 }

1098 -- Bits 1 through 3 shall not all have the same value.

1099

1100 Pathname-Pattern ::= SEQUENCE {

1101 equality-comparison [0] IMPLICIT Equality-Comparison,

1102 pathname-value [1] IMPLICIT SEQUENCE OF CHOICE {

1103 string-match [2] IMPLICIT String-Pattern,

1104 any-match [3] IMPLICIT NULL } }

1105

1106 String-Pattern ::= SEQUENCE {

1107 equality-comparison [0] IMPLICIT Equality-Comparison,

1108 string-value [1] IMPLICIT SEQUENCE OF CHOICE {

1109 substring-match [2] IMPLICIT GraphicString,

1110 any-match [3] IMPLICIT NULL,

1111 number-of-characters-match [4] IMPLICIT INTEGER } }

1112

1113 Bitstring-Pattern ::= SEQUENCE {

1114 equality-comparison [0] IMPLICIT Equality-Comparison,

1115 match-bitstring [1] IMPLICIT BIT STRING,

1116 significance-bitstring [2] IMPLICIT BIT STRING }

1117

1118 Date-and-Time-Pattern ::= SEQUENCE {

1119 relational-comparison [0] IMPLICIT Relational-Comparison,

1120 time-and-date-value [1] IMPLICIT GeneralizedTime }

1121

1122 Integer-Pattern ::= SEQUENCE {

1123 relational-comparison [0] IMPLICIT Relational-Comparison,

1124 integer-value [1] IMPLICIT INTEGER }

1125

1126 Object-Identifier-Pattern ::= SEQUENCE {
 1127 equality-comparison [0] IMPLICIT Equality-Comparison,
 1128 object-identifier-value [1] IMPLICIT OBJECT IDENTIFIER }
 1129
 1130 Boolean-Pattern ::= SEQUENCE {
 1131 equality-comparison [0] IMPLICIT Equality-Comparison,
 1132 boolean-value [1] IMPLICIT BOOLEAN }
 1133
 1134 Other-Pattern ::= Equality-Comparison
 1135 -- Matches against "No Value Available".
 1136
 1137 Contents-Type-Pattern ::= CHOICE {
 1138 document-type-pattern [0] IMPLICIT Object-Identifier-Pattern,
 1139 constraint-set-abstract-syntax-pattern
 1140 [1] IMPLICIT SEQUENCE {
 1141 constraint-set-pattern [2] IMPLICIT Object-Identifier-Pattern OPTIONAL,
 1142 -- Absent implies any Object Identifier is equal.
 1143 abstract-syntax-pattern [3] IMPLICIT Object-Identifier-Pattern OPTIONAL
 1144 -- Absent implies any Object Identifier is equal.
 1145 }
 1146
 1147 Attribute-Extensions-Pattern ::= SEQUENCE OF SEQUENCE {
 1148 extension-set-identifier [0] IMPLICIT Extension-Set-Identifier,
 1149 extension-set-attribute-patterns [1] IMPLICIT SEQUENCE OF SEQUENCE {
 1150 extension-attribute-identifier Extension-Attribute-Identifier,
 1151 extension-attribute-pattern ANY DEFINED BY extension-attribute-identifier }
 1152 -- The extension-attribute-pattern must be defined in
 1153 -- conjunction with the extension attribute in order to
 1154 -- perform pattern matching operations on it. It may be
 1155 -- defined in terms of other patterns within this
 1156 -- standard.
 1157 }
 1158
 1159 Destination-File-Directory ::= [APPLICATION 24] Pathname-Attribute
 1160
 1161 Objects-Attributes-List ::= [APPLICATION 25] IMPLICIT SEQUENCE OF
 1162 Read-Attributes
 1163
 1164 Override ::= INTEGER
 1165 { create-failure (0),
 1166 select-old-object (1),
 1167 delete-and-create-with-old-attributes (2),
 1168 delete-and-create-with-new-attributes (3) }
 1169
 1170 Error-Action ::= INTEGER
 1171 { terminate (0),
 1172 continue (1) }
 1173
 1174 Operation-Result ::= [APPLICATION 30] CHOICE {
 1175 success-object-count [0] IMPLICIT INTEGER,
 1176 success-object-names [1] IMPLICIT SEQUENCE OF Pathname }
 1177
 1178 Pathname ::= SEQUENCE OF GraphicString
 1179

1180 Pass-Passwords ::= SEQUENCE OF Password

1181 -- There is a one-to-one correspondence between the elements of

1182 -- Pass-Passwords and the non-terminal elements of the specified

1183 -- Pathname.

1184

1185 Path-Access-Passwords ::= [APPLICATION 27] IMPLICIT SEQUENCE OF SEQUENCE {

1186 read-password [0] IMPLICIT Password,

1187 insert-password [1] IMPLICIT Password,

1188 replace-password [2] IMPLICIT Password,

1189 extend-password [3] IMPLICIT Password,

1190 erase-password [4] IMPLICIT Password,

1191 read-attribute-password [5] IMPLICIT Password,

1192 change-attribute-password [6] IMPLICIT Password,

1193 delete-password [7] IMPLICIT Password,

1194 pass-passwords [8] IMPLICIT Pass-Passwords,

1195 link-password [9] IMPLICIT Password }

1196 -- There is a one-to-one correspondence between the elements of

1197 -- Path-Access-Passwords and the non-terminal elements of the

1198 -- specified Pathname.

1199

1200 Request-Operation-Result ::= [APPLICATION 31] IMPLICIT INTEGER {

1201 summary (0),

1202 fill-list (1) }

1203

1204 Attribute-Names ::= BIT STRING

1205 -- Kernel group

1206 { read-pathname (0),

1207 read-object-type (18),

1208 read-permitted-actions (1),

1209 read-contents-type (2),

1210 read-linked-object (19),

1211 read-child-objects (23),

1212 -- Storage group

1213 read-primary-pathname (20),

1214 read-storage-account (3),

1215 read-date-and-time-of-creation (4),

1216 read-date-and-time-of-last-modification (5),

1217 read-date-and-time-of-last-read-access (6),

1218 read-date-and-time-of-last-attribute-modification (7),

1219 read-identity-of-creator (8),

1220 read-identity-of-last-modifier (9),

1221 read-identity-of-last-reader (10),

1222 read-identity-of-last-attribute-modifier (11),

1223 read-object-availability (12),

1224 read-object-size (13),

1225 read-future-object-size (14),

1226 -- Security group

1227 read-access-control (15),

1228 read-path-access-control (21),

1229 read-legal-qualifications (16),

1230 -- Private group

1231 read-private-use (17) }

1232 -- Bits 19 through 23 are defined if and only if the limited-filestore-management

1233 -- or group-manipulation functional units are available.

1234

1235 Referent-Indicator ::= [APPLICATION 29] IMPLICIT BOOLEAN

1236

1237 END

1238

1239

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/Amd1:1992

Annex A Protocol state tables

(This annex forms part of the standard.)

NOTE – This amendment supersedes the whole of annex A. Subclauses A.1.2 and A.1.7 in ISO 8571-4:1988/Amd.4:1992, Annex A supersedes this amendment. All other parts of ISO 8571-4:1988/Amd.4:1992, Annex A are replaced by this annex.

A.1 Introduction

In the event of a discrepancy becoming apparent in the protocol described in the body of this standard and the protocol described in this Annex, this Annex is to take precedence.

These tables describe the operation of the basic file protocol machine (FPM) and error recovery protocol machine (FERPM).

The basic protocol tables are divided into three groups, covering:

- a) the FTAM regime management protocol machine;
- b) the file regime management protocol machine;
- c) the bulk data transfer protocol machine.

The initial and final states of the file regime management protocol machine are also states of FTAM regime management protocol machine. The initial and final states of the bulk data transfer protocol machine are also states of the file regime management protocol machine.

To provide formally complete and consistent description of the FTAM protocol sequences of events are considered indivisible in the model. That indivisibility ensures both that the states used in the description are well defined and that they are sufficient to describe the protocol.

The reception of a service primitive and the generation of dependent actions are considered to be an indivisible action. The reception of an FPDU and the generation of dependent actions are considered to be an indivisible action.

The indivisibility of actions may, in some implementations, cause certain events from file service users to be invalid at some service interface.

The conventions adopted in this Annex are described below.

A.1.1 System model used for protocol description

There are four types of receivers and sources of incoming and outgoing events (see figure 12):

- a) The internal file service user, which is the file error recovery protocol machine (FERPM);
- b) The external file service user — initiator or responder;
- c) The local system environment;
- d) the underlying presentation and ACSE service providers.

All primitives to/from the external file service user are passed through as primitives to/from the internal file service user to the basic FPM.

If the FERPM is not null — that is, either the RESTART or the RECOVER functional unit is available — parameters needed for error control and recovery may be added to these primitives.

Signals to/from the local environment group together events signalling errors and events signalling interactions amongst the FERPM, its docket and its local system. These local signals are

- e) L-ERRABT — local signal indicating protocol or other local errors leading to F-P-ABORT, with a permanent error value in the action result parameter;
- f) L-PABORT — local signal indicating that a F-P-ABORT request PDU with a transient error value in the action result should be issued;
- g) L-ERROR1, L-ERROR2 and L-ERROR3 — local signals indicating class I, class II and class III errors respectively;
- h) L-SUSPND — a local signal sent by the sender in

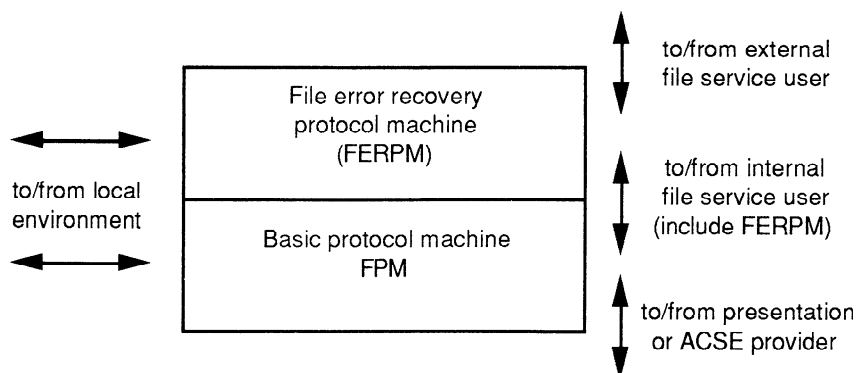


Figure 12 — State machine system model

the RESTART state to the local system to suspend the issuing of F-DATA request and F-DATA-END request primitives;

i) L-RESUME — a local signal to the local system to resume the issuing of F-DATA request and F-DATA-END request primitives when a sender has completed its recovery from RESTART and is now back in DATA-XFER state;

j) L-RESEND — a local signal from the FERPM to the sending local system. This signal includes the negotiated restart checkpoint and eliminates the need to store data values in the docket. Upon receipt of this local signal the local system can either

1) resend data from the checkpoint if the local system is aware of the algorithm used by the FERPM to generate the checkpoint; or

2) resend data from the start of the file if it has no knowledge of the checkpoint generating algorithm. The FERPM in the RESTART state will discard all data from the local system that occurs before the negotiated checkpoint. The FERPM will only forward data past the negotiated checkpoint to the FPM;

k) L-DATRQ — signal representing a re-issued F-DATA request primitive from the local system;

l) L-DAERQ — signal representing a re-issued F-DATA-END request primitive when a "data-end" marker becomes available from the docket;

m) L-CHKRQ — signal representing a re-issued F-CHECK request primitive when a checkpoint identifier becomes available from the docket;

n) L-EORIN — end of restart indication signal indicating that all checkpoint identifiers, "data-end" markers are all data to be resent have been sent;

o) L-GIVEUP — signal indicating that the responding FERPM should abandon the recovery process. This is introduced so that if the initiating FERPM is unable to re-establish the association then the responding FERPM can inform its users of the irrecoverable error.

p) L-ERRCTX — signal indicating that the P-ALTER-CONTEXT negotiation is unsuccessful. The error is to be processed following the F-OPEN or F-RECOVER confirm as applicable.

q) L-HOLD — signal to FERPM to hold any primitive from the external user for later processing.

r) L-UNHOLD — signal to FERPM to process any previously held primitives.

s) L-STPSND — a local signal from the FERPM to the sending local system to stop the resending of data and checkpoints.

A.1.2 Incoming Events

Events in the tables are depicted by abbreviated names. A list of these abbreviations, arranged alphabetically within categories, precedes each table. Wherever possible, these events have been arranged in the order in which a normal error-free sequence of events would occur.

It is assumed that incoming PDUs have been extracted from the user data fields of Presentation or ACSE indication or confirm primitives prior to being considered as incoming events.

The following naming conventions are used:

a) The prefix "F-" (as in F-INIRQ) indicates a primitive issued by the external file service (EFS) user or issued by the FERPM to the EFS user;

b) The prefix "P-" (as in P-ALTRQ) indicates a primitive issued by the Presentation Service (PS) provider.

c) The prefix "A-" (as in A-PABIN) indicates a primitive issued by the ACSE provider;

d) The prefix "L-" (as in L-ERRABT) indicates a local signal from the FPM or the FERPM to the local system or from the local system environment to the FPM or the FERPM;

e) The prefix "I-" (as in I-OPNRQ) indicates a primitive issued by the FERPM to the FPM or vice-versa;

f) Where no prefix is used, the event is the receipt of an FTAM PDU or, in the case of GRPRQ and GRPRP, a grouped sequence of PDUs. The only exception is "DATIN" which indicates a data value in user context in the data transfer state.

g) The following suffices indicate the basic types of primitives and PDUs:

"RQ"	request
"IN"	indication
"RP"	response
"CF"	confirm

A.1.3 Outgoing Events

The same naming conventions are used for outgoing events as for incoming events. Where the outgoing event is the issue of a PDU, it will normally give rise to the similarly named incoming event for the other protocol entity. For example, the outgoing event SELRP of the responding entity will become the incoming event SELRP for the initiating entity.

A.1.4 States

The suffix "-PD" indicates a pending state, waiting for some known primitive or PDU type. The suffix "-EX" indicates an expectant state in FERPM, waiting for some expected primitive.

The prefix "P-" normally indicates waiting for a primitive from the Presentation Service provider. Similarly, the prefix "F-" indicates waiting for a primitive from the EFS user. If neither of the above prefixes is used, the state normally indicates waiting for a PDU, or a non-pending state.

A.1.5 Predicates

The following symbols used in predicates have their normal Boolean algebraic meanings:

&	AND
	OR
~	NOT

An incoming event may satisfy more than one predicate, in which case the conditional actions for satisfied predicates will be executed.

Some actions may be conditional upon the negotiation of particular service functional units;

those in the FPM are:

- U1: Kernel functional unit
- U2: Read functional unit
- U3: Write functional unit
- U4: File access functional unit
- U5: Limited management functional unit
- U6: Enhanced management functional unit
- U6a: Limited filestore management functional unit
- U6b: Enhanced filestore management functional unit
- U6c: Object manipulation functional unit
- U6d: Group manipulation functional unit
- U7: Grouping functional unit
- U8: FADU locking functional unit

those in the FERPM are:

- U9: Recovery functional unit
- U10: Restart data transfer functional unit

A.1.6 Actions

Actions may be conditional on specified predicates, or they may be unconditional. When a line in a "detailed entries" specification commences with a predicate specifier followed by a colon, this indicates that all actions on that line are conditional upon the indicated predicate. An action may consist of one or more of the following:

- a) an outgoing event, indicated by its abbreviated name;
- b) a specified action, indicated by a number in square brackets [] and separated from any preceding items by a comma;
- c) a specified qualifier, indicated by a number in square brackets [] following a preceding item without an intervening comma;

Actions and qualifiers are described in a single list preceding the table.

The next state which the protocol entity will enter is indicated by an arrow preceding a state name, e.g. "⇒ SELECTED". For the null transition back to the current state, the notation "⇒ same state" is used.

Once a state change occurs, all subsequent actions in that entry are ignored.

A.1.7 Implicit Action

The following entity actions have not been explicitly specified in the State tables, but constitute part of the entity behaviour:

- a) A blank square in the table indicates an invalid event.
- b) Unless otherwise stated in the tables, an invalid event would cause the action specified in 10.2 to be executed.
- c) The Presentation Service is used throughout to identify "active" FTAM PCI from data with an equivalent encoding, but in a "passive" use data context.
- d) For each incoming PDU, a check is made that the appropriate functional unit has been negotiated for the connection. If the check fails, the procedures for protocol violation specified in 10.2 are followed.

A.1.8 Additional State Information

The tables make use of the indicators and other state variables defined in 6.2 and 11.2. In addition, the file regime management tables for the initiator make use of a threshold indicator and an expected response list, as a means of specifying the entity state when a concatenated PDU group is outstanding.

The symbol NSPN is used to denote the Next Synchronization Point Number state variable.

A.2 FTAM regime management protocol machine

A.2.1 States — FTAM regime management

UNINITIALIZED	FTAM regime ended.
INITIALIZE-PD	Initialize pending; wait for initialize response PDU.
INITIALIZED	FTAM regime started.
TERMINATE-PD	Terminate pending; wait for terminate response PDU.
I-INITIALIZE-PD	Initialize pending; wait for F-INITIALIZE response primitive from the internal file service user.
I-TERMINATE-PD	Terminate pending; wait for F-TERMINATE response primitive from the internal file service user.
CHG-PRE-PD	Change prefix pending, wait for change prefix response PDU
I-CHG-PRE-PD	Change prefix pending, wait for F-CHANGE-PREFIX response primitive from the internal file service user
LIST-PD	List pending, wait for list response PDU
I-LIST-PD	List pending, wait for F-LIST response primitive from the internal file service user
ANY-OTHER	Any other state of the file regime management protocol machine or the bulk data transfer protocol machine.
GRP-SELECT-PD	Group select pending, wait for group select response PDU
I-GRP-SELECT-PD	Group select pending, wait for F-GROUP-SELECT response primitive from the internal file service user
GRP-DELETE-PD	Group delete pending, wait for group delete response PDU
I-GRP-DELETE-PD	Group delete pending, wait for F-GROUP-DELETE response primitive from the internal file service user
GRP-COPY-PD	Group copy pending, wait for group copy response PDU
I-GRP-COPY-PD	Group copy pending, wait for F-GROUP-COPY response primitive from the internal file service user
GRP-MOVE-PD	Group move pending, wait for group move response PDU
I-GRP-MOVE-PD	Group move pending, wait for F-GROUP-MOVE response primitive from the internal file service user
GRP-LIST-PD	Group list pending, wait for group list response PDU
I-GRP-LIST-PD	Group list pending, wait for F-GROUP-LIST response primitive from the internal file service user
GRP-CATR-PD	Group change attribute pending, wait for group change attribute response PDU
I-GRP-CATR-PD	Group change attribute pending, wait for F-GROUP-CHANGE-ATTRIBUTE response primitive from the internal file service user

A.2.2 Incoming events — FTAM regime management

In the following lists, the functional unit in which the event occurs is included after the name, where applicable.

A.2.2.1 Incoming events — PDUs

UABRQ	U-Abort request PDU (on A-ABORT indication primitive)	U1
PABRQ	P-Abort request PDU (on A-ABORT indication primitive)	"
INIRQ	Initialize request PDU	"
INIRP	Initialize response PDU	"
TERRQ	Terminate request PDU	"
TERRP	Terminate response PDU	"

CPRRQ	Change prefix request PDU	U6a
CPRRP	Change prefix response PDU	U6a
LISRQ	List request PDU	U6a
LISRP	List response PDU	U6a
GCPRQ	Group copy request PDU	U6d
GCPRP	Group copy response PDU	U6d
GDLRQ	Group delete request PDU	U6d
GDLRP	Group delete response PDU	U6d
GLSRQ	Group list request PDU	U6d
GLSRP	Group list response PDU	U6d
GCARQ	Group change attribute request PDU	U6d
GCARP	Group change attribute response PDU	U6d
GMVRQ	Group move request PDU	U6d
GMVRP	Group move response PDU	U6d
GSLRQ	Group select request PDU	U6d
GSLRP	Group select response PDU	U6d

A.2.2.2 Incoming events from the internal file service user

I-UABRQ	F-U-ABORT request primitive
I-INIRQ	F-INITIALIZE request primitive
I-INIRP	F-INITIALIZE response primitive
I-TERRQ	F-TERMINATE request primitive
I-TERRP	F-TERMINATE response primitive
I-CPRRQ	F-CHANGE-PREFIX request primitive
I-CPRRP	F-CHANGE-PREFIX response primitive
I-LISRQ	F-LIST request primitive
I-LISRP	F-LIST response primitive
I-GCPRQ	F-GROUP-COPY request primitive
I-GCPRP	F-GROUP-COPY response primitive
I-GDLRQ	F-GROUP-DELETE request primitive
I-GDLRP	F-GROUP-DELETE response primitive
I-GLSRQ	F-GROUP-LIST request primitive
I-GLSRP	F-GROUP-LIST response primitive
I-GCARQ	F-GROUP-CHANGE-ATTRIBUTE request primitive
I-GCARP	F-GROUP-CHANGE-ATTRIBUTE response primitive
I-GMVRQ	F-GROUP-MOVE request primitive
I-GMVRP	F-GROUP-MOVE response primitive
I-GSLRQ	F-GROUP-SELECT request primitive
I-GSLRP	F-GROUP-SELECT response primitive

A.2.2.3 Incoming events from the ACSE provider

A-PABIN	A-P-ABORT indication primitive
---------	--------------------------------

A-ABIN	A-ABORT indication primitive without user data
A-ASSCF	A-ASSOCIATE confirm primitive without user data (with result indicating reject by ACSE or presentation service provider)

A.2.2.4 Incoming events from the local system

L-ERRABT	Local signal indicating error leading to abort
L-PABORT	Local signal indicating that a F-P-ABORT request PDU and a F-P-ABORT indication primitive to the internal file service user, both with a transient error value.

A.2.3 Outgoing events — FTAM regime management

A.2.3.1 Outgoing events — PDUs

UABRQ	U-Abort request PDU
PABRQ	P-Abort request PDU
INIRQ	Initialize request PDU
INIRP	Initialize response PDU
TERRQ	Terminate request PDU
TERRP	Terminate response PDU
CPRRQ	Change prefix request PDU
CPRRP	Change prefix response PDU
LISRQ	List request PDU
LISRP	List response PDU
GCPRQ	Group copy request PDU
GCPRP	Group copy response PDU
GDLRQ	Group delete request PDU
GDLRP	Group delete response PDU
GLSRQ	Group list request PDU
GLSRP	Group list response PDU
GCARQ	Group change attribute request PDU
GCARP	Group change attribute response PDU
GMVRQ	Group move request PDU
GMVRP	Group move response PDU
GSLRQ	Group select request PDU
GSLRP	Group select response PDU

A.2.3.2 Outgoing events to the internal file service user

I-UABIN	F-U-ABORT indication primitive
I-PABIN	F-P-ABORT indication primitive
I-INIIN	F-INITIALIZE indication primitive
I-INICF	F-INITIALIZE confirm primitive
I-TERIN	F-TERMINATE indication primitive
I-TERCF	F-TERMINATE confirm primitive
I-CPRIN	F-CHANGE-PREFIX indication primitive
I-CPRCF	F-CHANGE-PREFIX confirm primitive
I-LISIN	F-LIST indication primitive
I-LISCF	F-LIST confirm primitive

I-GCPIN	F-GROUP-COPY indication primitive
I-GPCPF	F-GROUP-COPY confirm primitive
I-GDLIN	F-GROUP-DELETE indication primitive
I-GDLCF	F-GROUP-DELETE confirm primitive
I-GLSIN	F-GROUP-LIST indication primitive
I-GLSCF	F-GROUP-LIST confirm primitive
I-GCAIN	F-GROUP-CHANGE-ATTRIBUTE indication primitive
I-GCACF	F-GROUP-CHANGE-ATTRIBUTE confirm primitive
I-GMVIN	F-GROUP-MOVE indication primitive
I-GMVCF	F-GROUP-MOVE confirm primitive
I-GSLIN	F-GROUP-SELECT indication primitive
I-GSLCF	F-GROUP-SELECT confirm primitive

A.2.4 Specific actions — FTAM regime management

- [1] Send the PDU constructed as user data and map parameters on the appropriate ACSE form.
- [2] Add a pdu to the current PSDU and terminate the current PSDU
- [3] Initialize state information - unset all additional state information indicators, set outstanding checkpoint counter to zero, NSPN to one.
- [4] Set state result parameters to "success".
- [5] In case of ACSE provider abort, if any diagnostic indicates communications failure then set the action result to transient error.
- [6] Set state result parameter to "failure".
- [7] Record the FQOS required and select the restart and/or recovery functional units if necessary.
- [12] Establish the list of presentation contexts needed to support FTAM PCI and ACSE PCI abstract syntaxes. If necessary, determine, on the basis of the abstract syntaxes derived from the contents type list supplied by the external file service user, the list of presentation contexts needed to support the file contents, and add it to the previous list. The resultant list is used to construct the presentation context definition list parameter.
- [13] Update the value of the contents type list parameter in the F-INITIALIZE indication primitive issued to the internal file service user, according to the abstract syntaxes rejected by the presentation service provider, if necessary.
- [14] According to the value of the contents type list on the F-INITIALIZE response primitive received from the internal file service user, construct the presentation context definition result parameter.
- [20] Set the action result parameter according to the result parameter of the A-ASSOCIATE confirm service primitive.
- [62] Record the peer entity's checkpoint window.
- [80] Set action result to permanent error
- [81] Set action result to transient error

A.2.5 Predicates — FTAM regime management

- P1: INITIALIZE request primitive is acceptable.
- P2: Result parameter of the ACSE confirm primitive indicates success of the operation.
- P3: State result parameter of the incoming response primitive indicates success of the operation.
- P5: Initialize request PDU is acceptable.
- P25: Negotiable parameters have values consistent with request.
- P310: The group manipulation functional unit is selected.
- P312: The limited filestore management functional unit is negotiated.

A.2.6 Initiating entity state table — FTAM regime management

STATE	U N I N I T I A L I Z E D	I N I T I A L I Z E - P D	I N I T I A L I Z E D	T E R M I N A T E - P D	C H G - P R E - P D	L I S T - P D	A N Y - O T H E R	G R P - S E L E C T - P D	G R P - D E L E T E - P D	G R P - C O P Y - P D	G R P - M O V E - P D	G R P - L I S T - P D	G R P - C A T R - P D
EVENT													
I-INITRQ	1												
A-ASSCF		10											
INIRP		2											
I-TERRQ			3										
TERRP				4									
I-CPRRQ			12										
CPRRP					13								
I-LISRQ			14										
LISRP						15							
A-PABIN		5	5	5	5	5	5						
A-ABIN		7	7	7	7	7	7						
UABRQ		6	6	6	6	6	6						
PABRQ		7	7	7	7	7	7						
I-UABRQ		8	8	8	8	8	8						
L-ERRABT		9	9	9	9	9	9						
L-PABORT		11	11	11	11	11	11						
I-GSLRQ			21										
GSLRP								22					
I-GDLRQ			23										
GDLRP									24				
I-GCPRQ			25										
GCPRP										26			
I-GMVRQ			27										
GMVRP											28		
I-GLSRQ			29										
GLSRP												30	
I-GCARQ			31										
GCARP													32

A.2.7 Initiating entity state table: detailed entries

- | | | | |
|----|---------------|----------------------|---------------------|
| 1: | P1: | [3],[12],INIRQ[1] | ⇒ INITIALIZE-PD |
| | ~P1: | I-INICF[6] | ⇒ <i>same state</i> |
| 2: | P3&P2 & P25: | [62],I-INICF[4],[7] | ⇒ INITIALIZED |
| | P3&P2 & ~P25: | I-INICF[6],PABRQ[1] | ⇒ UNINITIALIZED |
| | ~P2: | I-INICF[6] | ⇒ UNINITIALIZED |
| | ~P3: | PABRQ[1],I-PABIN[80] | ⇒ UNINITIALIZED |
| 3: | | TERRQ[1] | ⇒ TERMINATE-PD |
| 4: | | I-TERCF | ⇒ UNINITIALIZED |
| 5: | | I-PABIN[81] | ⇒ UNINITIALIZED |
| 6: | | I-UABIN | ⇒ UNINITIALIZED |

7:	I-PABIN	⇒ UNINITIALIZED
8:	UABRQ[1]	⇒ UNINITIALIZED
9:	PABRQ[1], I-PABIN[80]	⇒ UNINITIALIZED
10:	I-INITCF[6], I-PABIN[20]	⇒ UNINITIALIZED
11:	PABRQ[1], I-PABIN[81]	⇒ UNINITIALIZED
12:	CPRRQ[2]	⇒ CHG-PRE-PD
13:	I-CPRCF	⇒ INITIALIZED
14:	LISRQ[2]	⇒ LIST-PD
15:	I-LISCF	⇒ INITIALIZED
21:	GSLRQ[2]	⇒ GRP-SELECT-PD
22:	I-GSLCF	⇒ INITIALIZED
23:	GDLRQ[2]	⇒ GRP-DELETE-PD
24:	I-GDLCF	⇒ INITIALIZED
25:	GCPRQ[2]	⇒ GRP-COPY-PD
26:	I-GCPCF	⇒ INITIALIZED
27:	GMVRQ[2]	⇒ GRP-MOVE-PD
28:	I-GMVCF	⇒ INITIALIZED
29:	GLSRQ[2]	⇒ GRP-LIST-PD
30:	I-GLSCF	⇒ INITIALIZED
31:	GCAPO[2]	⇒ GRP-CATR-PD
32:	I-GCACF	⇒ INITIALIZED

A.2.8 Responding entity state table — FTAM regime management

STATE	U N I N I T I A L I Z E D	I - I N I T I A L I Z E D	I N I T I A L I Z E D	I - T E R M I N A T E D	I - C H G - P R E - P D	I - L I S T - P D	A N Y - O T H E R	I - G R P - S E L E C T - P D	I - G R P - D E L E T E - P D	I - G R P - C O P Y - P D	I - G R P - M O V E - P D	I - G R P - L I S T - P D	I - G R P - C A T R - P D
EVENT													
INIRQ	1												
I-INIRP		2											
TERRQ			3										
I-TERRP				4									
CPRQ			12										
I-CPRRP					13								
LISRQ			14										
I-LISRP						15							
A-PABIN		5	5	5	5	5	5						
A-ABIN		7	7	7	7	7	7						
UABRQ		6	6	6	6	6	6						
PABRQ		7	7	7	7	7	7						
I-UABRQ		8	8	8	8	8	8						
L-ERRABT		9	9	9	9	9	9						
L-PABORT		11	11	11	11	11	11						
GSLRQ			21										
I-GSLRP								22					
GDLRQ			23										
I-GDLRP									24				
GCPRQ			25										
I-GCPRP										26			
GMVRQ			27										
I-GMVRP											28		
GLSRQ			29										
I-GLSRP												30	
GCARQ			31										
I-GCARP													32

A.2.9 Responding entity state table: detailed entries

1:	P5:	I-INIRP[3],[62],[13]	⇒ I-INITIALIZED-PD
	~P5:	INIRP[6][1]	⇒ <i>same state</i>
2:	P3:	[7],[14],INIRP[1]	⇒ INITIALIZED
	~P3:	INIRP[6][1]	⇒ UNINITIALIZED
3:		I-TERIN	⇒ I-TERMINATE-PD
4:		TERRP[1]	⇒ UNINITIALIZED
5:		I-PABIN[81]	⇒ UNINITIALIZED
6:		I-UABIN	⇒ UNINITIALIZED
7:		I-PABIN	⇒ UNINITIALIZED
8:		UABRQ[1]	⇒ UNINITIALIZED

9:		PABRQ[1], I-PABIN[80]	⇒ UNINITIALIZED
11:		PABRQ[1], I-PABIN[81]	⇒ UNINITIALIZED
12:	P312: ~P312:	I-CPRIN PABRQ[1], I-PABIN[80]	⇒ I-CHG-PRE-PD ⇒ UNINITIALIZED
13:		CPRRP[2]	⇒ INITIALIZED
14:	P312: ~P312:	I-LISIN PABRQ[1], I-PABIN[80]	⇒ I-LIST-PD ⇒ UNINITIALIZED
15:		LISRP[2]	⇒ INITIALIZED
21:	P310: ~P310:	I-GSLIN PABRQ[1], I-PABIN[80]	⇒ I-GRP-SELECT-PD ⇒ UNINITIALIZED
22:	P4: ~P4:	GSLRP[2] GSLRP[8][2]	⇒ INITIALIZED ⇒ INITIALIZED
23:	P310: ~P310:	I-GDLIN PABRQ[1], I-PABIN[80]	⇒ I-GRP-DELETE-PD ⇒ UNINITIALIZED
24:		GDLRP[2]	⇒ INITIALIZED
25:	P310: ~P310:	I-GCPIN PABRQ[1], I-PABIN[80]	⇒ I-GRP-COPY-PD ⇒ UNINITIALIZED
26:		GCPRP[2]	⇒ INITIALIZED
27:	P310: ~P310:	I-GMVIN PABRQ[1], I-PABIN[80]	⇒ I-GRP-MOVE-PD ⇒ UNINITIALIZED
28:		GMVRP[2]	⇒ INITIALIZED
29:	P310: ~P310:	I-GLSIN PABRQ[1], I-PABIN[80]	⇒ I-GRP-LIST-PD ⇒ UNINITIALIZED
30:		GLSRP[2]	⇒ INITIALIZED
31:	P310: ~P310:	I-GCAIN PABRQ[1], I-PABIN[80]	⇒ I-GRP-CATR-PD ⇒ UNINITIALIZED
32:		GCARP[2]	⇒ INITIALIZED

A.3 Object regime management protocol machine

A.3.1 States — object regime management

In the FPM:

INITIALIZED	FTAM regime started
SELECT-PD	Select pending, wait for select response PDU
I-SELECT-PD	Select pending, wait for F-SELECT response primitive from the internal file service user
SELECTED	Selected
DESELECT-PD	Deselect pending, wait for deselect response PDU
I-DESELECT-PD	Deselect pending, wait for F-DESELECT response primitive from the internal file service user
CREAT-PD	Create pending, wait for create response PDU
I-CREATE-PD	Create pending, wait for F-CREATE response primitive from the internal file service user
DELETE-PD	delete pending, wait for delete response PDU
I-DELETE-PD	Delete pending, wait for F-DELETE response primitive from the internal file service user
READ-ATT-PD	Read attribute pending, wait for read attribute response PDU
I-READ-ATT-PD	Read attribute pending, wait for F-READ-ATTRIB response primitive from the internal file service user
CHG-ATT-PD	Change attribute pending, wait for change attribute response PDU.
I-CHG-ATT-PD	Change attribute pending, wait for F-CHANGE-ATTRIB response primitive from the internal file service user
OPEN-PD	Open pending, wait for open response PDU
I-OPEN-PD	Open pending, wait for F-OPEN response primitive from the internal file service user
P-ALTIN-PD	Presentation alter context pending, wait for P-ALTER-CONTEXT indication primitive.
P-ALTCF-PD	Presentation alter context pending, wait for P-ALTER-CONTEXT confirm primitive.
CLOSE-PD	Close pending, wait for close response PDU
I-CLOSE PD	Close pending, wait for F-CLOSE response primitive from the internal file service user
DXFRIDLE	Data transfer idle
LOCATE-PD	Locate pending, wait for locate response PDU
I-LOCATE-PD	Locate pending, wait for F-LOCATE response primitive from the internal file service user
ERASE-PD	Erase pending, wait for erase response PDU
I-ERASE-PD	Erase pending, wait for F-ERASE response primitive from the internal file service user
GROUPING	Building PDU group, wait for required primitives
GROUP-PD	Group pending, wait for response PDU group
I-GROUP-PD	Group pending, wait for F-BEGIN-GROUP response primitive from the internal file service user
CREATE-DIR-PD	Create directory pending, wait for create directory response PDU
I-CREATE-DIR-PD	Create directory pending, wait for F-CREATE-DIRECTORY response primitive from the internal file service user
LINK-PD	Link pending, wait for link response PDU
I-LINK-PD	Link pending, wait for F-LINK response primitive from the internal file service user
UNLINK-PD	Unlink pending, wait for unlink response PDU
I-UNLINK-PD	Unlink pending, wait for F-UNLINK response primitive from the internal file service user
SELECT-ANTR-PD	Select another pending, wait for select another response PDU
I-SELECT-ANTR-PD	Select another pending, wait for F-SELECT-ANOTHER response primitive from the internal file service user

READ-LINK-ATT-PD	Read link attribute pending, wait for read link attribute response PDU
I-READ-LINK-ATT-PD	Read link attribute pending, wait for F-READ-LINK-ATTRIB response primitive from the internal file service user
CHG-LINK-ATT-PD	Change link attribute pending, wait for change link attribute response PDU
I-CHG-LINK-ATT-PD	Change link attribute pending, wait for F-CHANGE-LINK-ATTRIB response primitive from the internal file service user
COPY-PD	Copy pending, wait for copy response PDU
I-COPY-PD	Copy pending, wait for F-COPY response primitive from the internal file service user
MOVE-PD	Move pending, wait for move response PDU
I-MOVE-PD	Move pending, wait for F-MOVE response primitive from the internal file service user

In the FERPM:

RECOVER-PD	Recover pending, wait for recover response PDU
I-RECOVER-PD	Recover pending, wait for F-RECOVER response primitive from the internal file service user
P-ALTIN-REC-PD	Presentation alter context pending, wait for P-ALTER-CONTEXT indication primitive during recovery.
P-ALTCF-REC-PD	Presentation alter context pending, wait for P-ALTER-CONTEXT confirm primitive during recovery.
DXFRIDLE-REC	Data transfer idle during recovery

A.3.2 Incoming events — object regime management

A.3.2.1 Incoming events — PDUs

CATRQ	Change-attrib request PDU	U6
CATRP	Change-attrib response PDU	U6
CLORQ	Close request PDU	U2, U3
CLORP	Close response PDU	U2, U3
CRERQ	Create request PDU	U5
CRERP	Create response PDU	U5
DELRQ	Delete request PDU	U5
DELRP	Delete response PDU	U5
DESRQ	Deselect request PDU	U1
DESRP	Deselect response PDU	U1
ERARQ	Erase request PDU	U4
ERARP	Erase response PDU	U4
LOCRRQ	Locate request PDU	U4
LOCRRP	Locate response PDU	U4
OPNRQ	Open request PDU	U2, U3
OPNRP	Open response PDU	U2, U3
RATRQ	Read-attrib request PDU	U5
RATRP	Read-attrib response PDU	U5
RECRQ	Recover request PDU	U9
RECRP	Recover response PDU	U9
SELRQ	Select request PDU	U1
SELRP	Select response PDU	U1
GRPRQ	A sequence of request PDUs (PDU-Group) preceded by an F-BEGIN-GROUP request PDU and followed by a F-END-GROUP request PDU.	U7

GRPRP	A sequence of response PDUs (PDU-Group) preceded by an F-BEGIN-GROUP response PDU and followed by a F-END-GROUP response PDU.	U7
CDRRQ	Create directory request PDU	U6b
CDRRP	Create directory response PDU	U6b
CLARQ	Change link attribute request PDU	U6b
CLARP	Change link attribute response PDU	U6b
CPYRQ	Copy request PDU	U6c
CPYRP	Copy response PDU	U6c
LNKRQ	Link request PDU	U6b
LNKRP	Link response PDU	U6b
MOVRQ	Move request PDU	U6c
MOV RP	Move response PDU	U6c
RLARQ	Read link attribute request PDU	U6b
RLARP	Read link attribute response PDU	U6b
SANRQ	Select another request PDU	U6d
SANRP	Select another response PDU	U6d

A.3.2.2 Incoming events from the internal file service user

I-CATRQ	F-CHANGE-ATTRIB request primitive
I-CATRP	F-CHANGE-ATTRIB response primitive
I-CLO RQ	F-CLOSE request primitive
I-CLO RP	F-CLOSE response primitive
I-CRERQ	F-CREATE request primitive
I-CRERP	F-CREATE response primitive
I-DELRQ	F-DELETE request primitive
I-DELRP	F-DELETE response primitive
I-DESRQ	F-DESELECT request primitive
I-DESRP	F-DESELECT response primitive
I-ERARQ	F-ERASE request primitive
I-ERARP	F-ERASE response primitive
I-LOC RQ	F-LOCATE request primitive
I-LOC RP	F-LOCATE response primitive
I-OPNRQ	F-OPEN request primitive
I-OPNRP	F-OPEN response primitive
I-RATRQ	F-READ-ATTRIB request primitive
I-RATRP	F-READ-ATTRIB response primitive
I-RECRQ	F-RECOVER request primitive
I-RECRP	F-RECOVER response primitive
I-SELRQ	F-SELECT request primitive
I-SELRP	F-SELECT response primitive
I-BGPRQ	F-BEGIN-GROUP request primitive
I-BGPRP	F-BEGIN-GROUP response primitive
I-EGPRQ	F-END-GROUP request primitive

I-EGPRP	I-END-GROUP response primitive
I-CDRRQ	F-CREATE-DIRECTORY request primitive
I-CDRRP	F-CREATE-DIRECTORY response primitive
I-CLARQ	F-CHANGE-LINK-ATTRIB request primitive
I-CLARP	F-CHANGE-LINK-ATTRIB response primitive
I-CPYRQ	F-COPY request primitive
I-CPYRP	F-COPY response primitive
I-LNKRQ	F-LINK request primitive
I-LNKRQ	F-LINK response primitive
I-MOVRQ	F-MOVE request primitive
I-MOVRP	F-MOVE response primitive
I-RLARQ	F-READ-LINK-ATTRIB request primitive
I-RLARP	F-READ-LINK-ATTRIB response primitive
I-SANRQ	F-SELECT-ANOTHER request primitive
I-SANRP	F-SELECT-ANOTHER response primitive

A.3.2.3 Incoming events from the presentation service provider

P-ALTIN	P-ALTER-CONTEXT indication primitive
P-ALTCF	P-ALTER-CONTEXT confirm primitive

A.3.3 Outgoing events — file regime management

A.3.3.1 Outgoing events — PDUs

CATRQ	Change-attrib request PDU
CATRP	Change-attrib response PDU
CLOREQ	Close request PDU
CLOREP	Close response PDU
CRERQ	Create request PDU
CRERP	Create response PDU
DELRQ	Delete request PDU
DELRP	Delete response PDU
DESRQ	Deselect request PDU
DESRP	Deselect response PDU
ERARQ	Erase request PDU
ERARP	Erase response PDU
LOCREQ	Locate request PDU
LOCRP	Locate response PDU
OPNRQ	Open request PDU
OPNRP	Open response PDU
PABRQ	P-Abort request PDU
RATRQ	Read-attrib request PDU
RATRP	Read-attrib response PDU
RECRQ	Recover request PDU
RECRP	Recover response PDU

SELRQ	Select request PDU
SELRP	Select response PDU
CDRRQ	Create directory request PDU
CDRRP	Create directory response PDU
CLARQ	Change link attribute request PDU
CLARP	Change link attribute response PDU
CPYRQ	Copy request PDU
CPYRP	Copy response PDU
LNKRQ	Link request PDU
LNKRP	Link response PDU
MOVRQ	Move request PDU
MOVRP	Move response PDU
RLARQ	Read link attribute request PDU
RLARP	Read link attribute response PDU
SANRQ	Select another request PDU
SANRP	Select another response PDU

A.3.3.2 Outgoing events to the internal file service user

I-CATIN	F-CHANGE-ATTRIB indication primitive
I-CATCF	F-CHANGE-ATTRIB confirm primitive
I-CLOIN	F-CLOSE indication primitive
I-CLOCF	F-CLOSE confirm primitive
I-CREIN	F-CREATE indication primitive
I-CRECF	F-CREATE confirm primitive
I-DELIN	F-DELETE indication primitive
I-DELCF	F-DELETE confirm primitive
I-DESIN	F-DESELECT indication primitive
I-DESCF	F-DESELECT confirm primitive
I-ERAIN	F-ERASE indication primitive
I-ERACF	F-ERASE confirm primitive
I-LOCIN	F-LOCATE indication primitive
I-LOCCF	F-LOCATE confirm primitive
I-OPNIN	F-OPEN indication primitive
I-OPNCF	F-OPEN confirm primitive
I-PABIN	F-P-ABORT indication primitive
I-RATIN	F-READ-ATTRIB indication primitive
I-RATCF	F-READ-ATTRIB confirm primitive
I-RECIN	F-RECOVER indication primitive
I-RECCF	F-RECOVER confirm primitive
I-SELIN	F-SELECT indication primitive
I-SELCF	F-SELECT confirm primitive
I-CDRIN	F-CREATE-DIRECTORY indication primitive
I-CDRCF	F-CREATE-DIRECTORY confirm primitive

I-CLAIM	F-CHANGE-LINK-ATTRIB indication primitive
I-CLACF	F-CHANGE-LINK-ATTRIB confirm primitive
I-COPYIN	F-COPY indication primitive
I-CPYCF	F-COPY confirm primitive
I-LNKIN	F-LINK indication primitive
I-LNKCF	F-LINK confirm primitive
I-MOVIN	F-MOVE indication primitive
I-MOVCF	F-MOVE confirm primitive
I-RLAIN	F-READ-LINK-ATTRIB indication primitive
I-RLACF	F-READ-LINK-ATTRIB confirm primitive
I-SANIN	F-SELECT-ANOTHER indication primitive
I-SANCF	F-SELECT-ANOTHER confirm primitive

A.3.3.3 Outgoing events to the presentation service provider

P-ALTRQ	P-ALTER-CONTEXT request primitive
P-ALTRP	P-ALTER-CONTEXT response primitive

A.3.3.4 Outgoing events to the local system

L-ERRCTX	Local signal indicating P-ALTER-CONTEXT error
----------	---

A.3.4 Specific actions — file regime management

- [1] Send the PDU constructed as user data and map parameters on the appropriate ACSE form.
- [2] Add a PDU to the current PSDU and terminate the current PSDU.
- [8] Includes a state result parameter indicating failure.
- [9] Set the remove contexts parameter of the F-OPEN or the F-RECOVER request PDU.
- [10] Determine, on the basis of the abstract syntax derived from the contents type supplied by the external file service user, the set of presentation contexts necessary to support the file contents. All contexts identified in the remove context parameter of the OPNRQ or RECRQ PDUs shall be deleted unless required in the new open regime; optionally, the responder may elect to delete any other contexts in the defined context set which are not required. Inform the user if contexts need to be defined but the functional unit is unavailable.
- [11] Set the presentation-action parameter of the OPNRP or RECRP PDU if a P-ALTER-CONTEXT exchange is needed.
- [15] Preserve the PDU or PDUs for further processing.
- [28] Set the bulk data transfer number to that specified in the F-RECOVER request primitive or PDU.
- [31] Set the bulk data transfer number to zero.
- [32] Erase the expected response list. Set the threshold indicator to the value given by the primitive parameter. Add an F-BEGIN-GROUP request PDU to the current PSDU.
- [33] Add a request PDU corresponding to the primitive function to the current PSDU, and add the corresponding element to the expected response list.
- [34] Add an F-END-GROUP request PDU to the current PSDU and terminate the PSDU.
- [35] Check that every PDU in the PDU-Group is one of SELRP, CRERP, CLORP, RATRP, CATRP, DESRP, DELRP, or OPNRP; and that the composition and ordering of the PDUs is consistent with the group specified by the expected response list (recognizing that the response group may be truncated because of a detected error).
- [36] Check that the number of PDUs in the PDU-Group is consistent with the value of the threshold parameter and that the other parameter values are consistent with negotiation.
- [37] Considering each PDU in the PDU-Group, issue the corresponding confirm primitive to the IFS user with parameters derived from the PDU.

- [38] Add a response PDU corresponding to the primitive function to the current PSDU.
- [39] Add an F-END-GROUP response PDU to the current PSDU and terminate the PSDU.
- [40] Check that the composition and ordering of the PDU-Group is consistent with one of the concatenated sequences "A", "C", or "D", as defined in Part 3, Annex E.
- [41] Check that the composition and ordering of the PDU-Group is consistent with the concatenated sequence "E" as defined in Part 3, Annex E.
- [42] Check that the composition and ordering of the PDU-Group is consistent with the concatenated sequence "B" as defined in Part 3, Annex E.
- [43] Considering in turn each PDU in the PDU-Group, issue the corresponding indication primitive to the IFS user with parameters derived from the PDU.
- [45] Set the checkpoint identifier expected to the value negotiated plus one.

A.3.5 Predicates — object regime management

- P4: The state result parameter on the incoming response PDU or response primitive indicates successful execution of operation.
- P6: The P-ALTER-CONTEXT negotiation fails.
- P7: A group of PDUs is preserved.
- P9: The presentation context management functional unit is available and there are presentation contexts to be deleted or defined.
- P10: The presentation-action parameter in the OPNRP PDU or in the RECRP PDU is TRUE, in which case the presentation context management functional unit should be available.
- P17: The PDU-Group contains a SELRP or CRERP PDU with a state result parameter indicating failure, or a DESRP or DELRP PDU.
- P18: Checking the PDU-Group reveals a protocol error.
- P19: The PDU-Group contains an OPNRP PDU with a state result parameter indicating success.
- P43: The recovery procedure is in progress.
- P310: The group manipulation functional unit is selected.
- P311: The object manipulation functional unit is selected.
- P313: The enhanced filestore management functional unit is selected.

A.3.6 Initiating entity state table — object regime management

STATE																													
	I N I T I A L I Z E D	S E L E C T - P D	S E L E C T E D	D E S E L E C T - P D	C R E A T E - P D	D E L E T E - P D	R E A D - A T T - P D	C H G - A T T - P D	O P E N - P D	P - A L T I N - P D	D X F R I D L E - R E C	C L O S E - P D	R E C O V E R - P D	P - A L T I N - R E C - P D	L O C A T E - P D	E R A S E - P D	C R E A T E - D I R - P D	L I N K - P D	U N L I N K - P D	S E L E C T - A N T R - P D	R E A D - L I N K - A T T - P D	C H G - L I N K - A T T - P D	C O P Y - P D	M O V E - P D	G R O U P I N G	G R O U P - P D			
I-SELRQ	1																											28	
SELRP		2																											
I-DESRQ			3																									28	
DESRP				4																									
I-CRERQ	5																											28	
CRERP					6																								
I-DELRQ			7																									28	
DELRP						8																							
I-RATRQ			9																									28	
RATRP							10																						
I-CATRQ			11																									28	
CATRP								12																					
I-OPNRQ			13																									22	
OPNRP									14																				
P-ALTIN										15					21														
I-CLORQ											17	17																28	
CLORP													18																
I-RECRQ	19																												
RECRP													20																
I-LOCRQ											23	23																	
LOCRP															24														
I-ERARQ											25	25																	
ERARP																26													
I-CDRRQ	31																											28	
CDRRP																	32												
I-LNKRQ	33																											28	
LNKRQ																		34											
I-ULNRQ			35																									28	
ULNRP																			36										
I-SANRQ	37																											28	
SANRP																					38								
I-RLARQ			39																									28	
RLARP																						40							
I-CLARQ			41																									28	
CLARP																							42						
I-CPYRQ			43																									28	
CPYRP																								44					
I-MOVRQ			45																									28	
MOVRP																									46				
I-BGPRQ	27	27									27	27																	
I-EGPRQ																												29	
GRPRP																												30	

A.3.7 Initiating entity state table (Part 2) — detailed entries

1:		SELRQ[2]	⇒ SELECT-PD
2:	P4: ~P4:	I-SELCF I-SELCF[8]	⇒ SELECTED ⇒ INITIALIZED
3:		DESRQ[2]	⇒ DESELECT-PD
4:		I-DESCF	⇒ INITIALIZED
5:		CRERQ[2]	⇒ CREATE-PD
6:		I-CRECF	⇒ SELECTED
7:		DELRQ[2]	⇒ DELETE-PD
8:		I-DELCF	⇒ INITIALIZED
9:		RATRQ[2]	⇒ READ-ATT-PD
10:		I-RATCF	⇒ SELECTED
11:		CATRQ[2]	⇒ CHG-ATT-PD
12:		I-CATCF	⇒ SELECTED
13:	P9:	[9], OPNRQ[2],[31]	⇒ OPEN-PD
14:	~P4: P4 & ~P10: P4 & P10:	I-OPNCF[8] I-OPNCF [15]	⇒ SELECTED ⇒ DXFRIDLE ⇒ P-ALTIN-PD
15:	P6: P7: ~P7:	L-ERRCTX, P-ALTRP, [37] I-OPNCF	⇒ DXFRIDLE ⇒ DXFRIDLE
17:		CLOQRQ[2]	⇒ CLOSE-PD
18:		I-CLOCF	⇒ SELECTED
19:	P9:	[9], RECRQ[2],[28]	⇒ RECOVER-PD
20:	~P4: P4 & ~P10: P4 & P10:	I-RECCF[8] [45],I-RECCF [15]	⇒ INITIALIZED ⇒ DXFRIDLE-REC ⇒ P-ALTIN-REC-PD
21:	P6:	L-ERRCTX, P-ALTRP, [45],I-RECCF	⇒ DXFRIDLE-REC
22:	P9:	[9], [31],[33]	⇒ <i>same state</i>
23:		LOCRQ[2]	⇒ LOCATE-PD
24:	~P43: P43:	I-LOCCF I-LOCCF	⇒ DXFRIDLE ⇒ DXFRIDLE-REC
25:		ERARQ[2]	⇒ ERASE-PD
26:	~P43: P43:	I-ERACF I-ERACF	⇒ DXFRIDLE ⇒ DXFRIDLE-REC
27:		[32]	⇒ GROUPING
28:		[33]	⇒ <i>same state</i>
29:		[34]	⇒ GROUP-PD

30:	P18: P17 & ~P18: ~P17 & ~P18 & P19 & ~P10: ~P17 & ~P18 & P19 & P10: ~P17 & ~P18 & ~P19:	[35],[36], I-PABIN, PABRQ[1] [37] [37] [15] [37]	⇒ UNINITIALIZED ⇒ INITIALIZED ⇒ DXFRIDLE ⇒ P-ALTIN-PD ⇒ SELECTED
31:		CDRRQ[2]	⇒ CREATE-DIR-PD
32:	P4: ~P4 :	I-CDRCF I-CDRCF[8]	⇒ SELECTED ⇒ INITIALIZED
33:		LNKRQ[2]	⇒ LINK-PD
34:	P4: ~P4 :	I-LNKCF I-LNKCF[8]	⇒ SELECTED ⇒ INITIALIZED
35:		ULNRQ[2]	⇒ UNLINK-PD
36:		I-ULNCF	⇒ INITIALIZED
37:		SANRQ[2]	⇒ SELECT-ANTR-PD
38:	P4: ~P4:	I-SANCF I-SANCF[8]	⇒ SELECTED ⇒ INITIALIZED
39:		RLARQ[2]	⇒ READ-LINK-ATT-PD
40:		I-RLACF	⇒ SELECTED
41:		CLARQ[2]	⇒ CHG-LINK-ATT-PD
41:		I-CLACF	⇒ SELECTED
42:		CPYRQ[2]	⇒ COPY-PD
43:		I-CPYCF	⇒ SELECTED
44:		MOVRQ[2]	⇒ MOVE-PD
45:		I-MOVCF	⇒ SELECTED

A.3.8 Responding entity state table — object regime management

STATE																																
EVENT	I N I T I A L I Z E D	I - S E L E C T - P D	S E L E C T E D	I - D E S E L E C T - P D	I - C R E A T E - P D	I - D E L E T E - P D	I - R E A D - A T T - P D	I - C H G - A T T - P D	I - O P E N - P D	P - A L T I N - P D	D X F R I D L E	D X F R I D L E - R E C	I - C L O S E - P D	I - R E C O V E R - P D	P - A L T C F - R E C - P D	I - L O C A T E - P D	I - E R A S E - P D	I - C R E A T E - D I R - P D	I - L I N K - P D	I - U N L I N K - P D	I - S E L E C T - A N T I - P D	I - R E A D - L I N K - A T T - P D	I - C H G - L I N K - A T T - P D	I - C O P Y - P D	I - M O V E - P D	I - G R O U P - P D	G R O U P I N G					
SELRQ	1																															
I-SELRP		2																														32
DESRQ			3																													
I-DESRP				4																												32
CRERQ	5																															
I-CRERP					6																											32
DELRQ			7																													
I-DELRP						8																										32
RATRQ				9																												
I-RATRP							10																									32
CATRQ				11																												
ICATRP								12																								32
OPNRQ				13																												
I-OPNRP									14																							22
P-ALTCF										15					21																	
CLORQ											17	17																				
I-CLORP													18																			32
RECRQ	19																															
I-RECRP														20																		
LOCRQ											24	24																				
I-LOCRP																25																
ERARQ											26	26																				
I-ERARP																	27															
CDRRQ	34																															
I-CDRRP																		35														32
LNKRQ	36																															
I-LNKRQ																				37												32
ULNRQ			38																													
I-ULNRP																					39											32
SANRQ	40																															
I-SANRP																						41										32
RLARQ			42																													
I-RLARP																							43									32
CLARQ				44																												
I-CLARP																								45								32
CPYRQ				46																												
I-CPYRP																										47						32
MOVRQ				48																												
I-MOVRP																											49					32
I-BGPRP																													31			
I-EGPRP																																33
GRPRQ	28	29									30	30																				

A.3.9 Responding entity state table (Part 2) — detail entries

1:		I-SELIN	⇒ I-SELECT-PD
2:	P4: ~P4:	SELRP[2] SELRP[8][2]	⇒ SELECTED ⇒ INITIALIZED
3:		I-DESIN	⇒ I-DESELECT-PD
4:		DESRP[2]	⇒ INITIALIZED
5:		I-CREIN	⇒ I-CREATE-PD
6:	P4: ~P4:	CRERP[2] CRERP[8][2]	⇒ SELECTED ⇒ INITIALIZED
7:		I-DELIN	⇒ I-DELETE-PD
8:		DELRP[2]	⇒ INITIALIZED
9:		I-RATIN	⇒ I-READ-ATT-PD
10:		RATRP[2]	⇒ SELECTED
11:		I-CATIN	⇒ I-CHG-ATT-PD
12:		CATRP[2]	⇒ SELECTED
13:		I-OPNIN,[31]	⇒ I-OPEN-PD
14:	~P4: P4: P4 & ~P9: P4 & P9:	OPNRP[8][2] [10] OPNRP[2] [11],OPNRP[2],P-ALTRQ	⇒ SELECTED ⇒ DXFRIDLE ⇒ P-ALTCF-PD
15:	P6:	L-ERRCTX,	⇒ DXFRIDLE
17:		I-CLOIN	⇒ I-CLOSE-PD
18:		CLORP[2]	⇒ SELECTED
19:		I-RECIN,[28]	⇒ I-RECOVER-PD
20:	~P4: P4: P4 & ~P9: P4 & P9:	RECRP[8][2] [10],[45], RECRP[2] [11],RECRP[2],P-ALTRQ	⇒ INITIALIZED ⇒ DXFRIDLE-REC ⇒ P-ALTCF-REC-PD
21:	P6:	L-ERRCTX,	⇒ DXFRIDLE-REC
22:		[38],[31]	⇒ <i>same state</i>
24:		I-LOCIN	⇒ I-LOCATE-PD
25:	~P43: P43:	LOCRP[2] LOCRP[2]	⇒ DXFRIDLE ⇒ DXFRIDLE-REC
26:		I-ERAIN	⇒ I-ERASE-PD
27:	~P43: P43:	ERARP[2] ERARP[2]	⇒ DXFRIDLE ⇒ DXFRIDLE-REC
28:	P18: ~P18:	[40], I-PABIN,PABRQ[1] [43]	⇒ UNINITIALIZED ⇒ I-GROUP-PD

29:	P18: ~P18:	[41], I-PABIN,PABRQ[1] [43]	⇒ UNINITIALIZED ⇒ I-GROUP-PD
30:	P18: ~P18:	[42], I-PABIN,PABRQ[1] [43]	⇒ UNINITIALIZED ⇒ I-GROUP-PD
31:		[38]	⇒ GROUPING
32:		[38]	⇒ <i>same state</i>
33:	P17: ~P17 & P19: ~P17 & P19 & ~P9: ~P17 & P19 & P9 ~P17 & ~P19:	[39], [10], P-ALTRQ	⇒ INITIALIZED ⇒ DXFRIDLE ⇒ P-ALTCF-PD ⇒ SELECTED
34:	P313: ~P313:	I-CDRIN PABRQ[1],I-PABIN[80]	⇒ I-CREATE-DIR-PD ⇒ UNINITIALIZED
35:	P4: ~P4 :	CDRRP[2] CDRRP[8][2]	⇒ SELECTED ⇒ INITIALIZED
36:	P313: ~P313:	I-LNKIN PABRQ[1],I-PABIN[80]	⇒ I-LINK-PD ⇒ UNINITIALIZED
37:	P4: ~P4	LNKRP[2] LNKRP[8][2]	⇒ SELECTED ⇒ INITIALIZED
38:	P313: ~P313:	I-ULNIN PABRQ[1],I-PABIN[80]	⇒ I-UNLINK-PD ⇒ UNINITIALIZED
39:		ULNRP[2]	⇒ INITIALIZED
40:	P310: ~P310:	I-SANIN PABRQ[1],I-PABIN[80]	⇒ I-SELECT-ANTR-PD ⇒ UNINITIALIZED
41:	P4: ~P4 :	SANRP[2] SANRP[8][2]	⇒ SELECTED ⇒ INITIALIZED
42:	P313: ~P313:	I-RLAIN PABRQ[1],I-PABIN[80]	⇒ I-READ-LINK-ATT-PD ⇒ UNINITIALIZED
43:		RLARP[2]	⇒ SELECTED
44:	P313: ~P313:	I-CLAIN PABRQ[1],I-PABIN[80]	⇒ I-CHG-LINK-ATT-PD ⇒ UNINITIALIZED
45:		CLARP[2]	⇒ SELECTED
46:	P311: ~P311:	I-CPYIN PABRQ[1],I-PABIN[80]	⇒ I-COPY-PD ⇒ UNINITIALIZED
47:		CPYRP[2]	⇒ SELECTED
48:	P311: ~P311:	I-MOVIN PABRQ[1],I-PABIN[80]	⇒ I-MOVE-PD ⇒ UNINITIALIZED
49:		MOVRP[2]	⇒ SELECTED

NOTE: L-ERRCTX provides information to the responder's environment.

A.4 Bulk data transfer protocol machine

A.4.1 States — bulk data transfer

DXFRIDLE	Data transfer idle
READ	Read data transfer
I-READ-ENDING	Read transfer end, wait for F-TRANSFER-END request primitive from the internal file service user
READ-ENDING	Read transfer ending, wait for transfer end request PDU
I-R-XFR-ENDING	Wait for F-TRANSFER-END response primitive after READ from the internal file service user
R-XFER-ENDING	Wait Wait for transfer-end response PDU after READ
WRITE	Write data transfer
I-WRITE-ENDING	Write transfer-end, wait for F-TRANSFER-END request primitive from the internal file service user
WRITE-ENDING	Write transfer-end, wait for transfer end request PDU
I-W-XFR-ENDING	Wait for F-TRANSFER-END response primitive after WRITE from the internal file service user
W-XFER-ENDING	Wait for transfer-end response PDU after WRITE
CANCEL-PD	Cancel pending, wait for cancel response PDU
I-CANCEL-PD	Cancel pending, wait for F-CANCEL response primitive from the internal file service user
RRESTART-PD	Read restart pending, wait for restart response PDU in read operation
I-RRESTART-PD	Read restart pending, wait for F-RESTART response primitive in read operation from the internal file service user
WRESTART-PD	Write restart pending, wait for restart response PDU in write operation
I-WRESTART-PD	Write restart pending, wait for F-RESTART response primitive in write operation from the internal file service user
P-TOKEN-PD	Wait for sync-minor token
DXFRIDLE-REC	Data transfer idle during recovery
REA-SYMIN-PD	Wait for first P-SYNC-MINOR indication primitive after READ
RES-SYMIN-PD	Wait for first P-SYNC-MINOR indication primitive, restart requested
CAN-SYMIN-PD	Wait for first P-SYNC-MINOR indication primitive, cancel requested
WRT-SYMIN-PD	Wait for first P-SYNC-MINOR indication primitive after WRITE
REA-SYCMCF-PD	Wait for first P-SYNC-MINOR confirm primitive after READ
RES-SYCMCF-PD	Wait for first P-SYNC-MINOR confirm primitive, restart requested
CAN-SYCMCF-PD	Wait for first P-SYNC-MINOR confirm primitive, cancel requested
WRT-SYCMCF-PD	Wait for first P-SYNC-MINOR confirm primitive after WRITE
RESTART-CAN-PD	Restart cancel pending, wait for cancel or restart response PDU

A.4.2 Incoming events — bulk data transfer

A.4.2.1 Incoming events — PDUs

CANRP	Cancel response PDU (in user data of P-RESYNC(abandon) confirm if resync functional unit has been negotiated).	U2, U3
CANRQ	Cancel request PDU (in user data of P-RESYNC(abandon) indication if resync functional unit has been negotiated).	U2, U3
DAERQ	Data end request PDU.	U2, U3
TRERP	Transfer end response PDU.	U2, U3
TRERQ	Transfer end request PDU.	U2, U3

RESRQ	Restart request PDU, in user data of P-RESYNC (restart) indication.	U10
RESRP	Restart response PDU, in user data of P-RESYNC (restart) confirm.	U10
REARQ	Read request PDU.	U2
WRTRQ	Write request PDU.	U3
DATIN	data value in user context (not syntactically classed as a PDU).	U2, U3

A.4.2.2 Incoming events from the internal file service user

I-CANRP	F-CANCEL response primitive.
I-CANRQ	F-CANCEL request primitive.
I-CHKRQ	F-CHECK request primitive.
I-CHKRP	F-CHECK response primitive
I-DATRQ	F-DATA request primitive.
I-DAERQ	F-DATA-END request primitive.
I-REARQ	F-READ request primitive.
I-RESRQ	F-RESTART request primitive.
I-RESRP	F-RESTART response primitive
I-TRERQ	F-TRANSFER-END request primitive.
I-TRERP	F-TRANSFER-END response primitive
I-WRTRQ	F-WRITE request primitive.

A.4.2.3 Incoming events from the presentation service provider

P-SYMIN	P-SYNC-MINOR indication primitive.
P-SYMPF	P-SYNC-MINOR confirm primitive.
P-TOKIN	P-TOKEN-GIVE indication with minor-sync. token.

A.4.3 Outgoing events — bulk data transfer

A.4.3.1 Outgoing events — PDUs

CANRP	Cancel response PDU (in user data of P-RESYNC(abandon) response if resync functional unit has been negotiated)
CANRQ	Cancel request PDU (in user data of P-RESYNC(abandon) request if resync functional unit has been negotiated)
DAERQ	Data end request PDU
TRERP	Transfer end response PDU
TRERQ	Transfer end request PDU
RESRQ	Restart request PDU, in user data of P-RESYNC(restart) request
RESRP	Restart response PDU, in user data of P-RESYNC(restart) response
REARQ	Read request PDU
WRTRQ	Write request PDU

A.4.3.2 Outgoing events to the internal file service user

I-CANCF	F-CANCEL confirm primitive
I-CANIN	F-CANCEL indication primitive
I-CHKIN	F-CHECK indication primitive
I-CHKCF	F-CHECK confirm primitive
I-DATIN	F-DATA indication primitive

I-DAEIN	F-DATA-END indication primitive
I-REAIN	F-READ indication primitive
I-RESIN	F-RESTART indication primitive
I-RESCF	F-RESTART confirm primitive
I-TREIN	F-TRANSFER-END indication primitive
I-TRECF	F-TRANSFER-END confirm primitive
I-WRTIN	F-WRITE indication primitive

A.4.3.3 Outgoing events to the presentation service provider

P-SYMRQ	P-SYNC-MINOR request primitive
P-SYMRP	P-SYNC-MINOR response primitive
P-DATRQ	P-DATA request primitive
P-TOKRQ	P-TOKEN-GIVE request primitive with minor-synch token

A.4.3.4 Outgoing events to the local system

L-ERRABT	Local signal indicating an error leading to abort
----------	---

A.4.4 Specific actions — bulk data transfer

- [2] Add a PDU to the current PSDU and terminate the current PSDU.
- [15] Preserve the PDU for further processing
- [16] Add a PDU to the current PSDU and optionally terminate the current PSDU, according to local decision.
- [17] Use for the sync point serial number, the checkpoint received plus the offset.
- [18] Add the data given on the F-DATA request to the current PSDU. Optionally (depending upon local system considerations) terminate the PSDU.
- [19] Use for the checkpoint, the sync point serial number received minus the offset.
- [21] Unset discard indicator.
- [22] Set discard indicator and set the outstanding checkpoint counter to zero.
- [23] Discard any user data not yet delivered and set outstanding checkpoint counter to zero.
- [24] Add 1 to the NSPN.
- [25] Terminate the current PSDU.
- [26] If Presentation resynchronize functional unit is available, send PDU as user data on a P-RESYNC(abandon) request or response primitive; otherwise add PDU to the current PSDU and terminate the current PSDU.
- [27] Increment the checkpoint identifier expected.
- [29] Increment the outstanding checkpoint counter.
- [30] Decrement the outstanding checkpoint counter according to the checkpoint number confirmed (see 15.3.2).
- [44] Increment the bulk data transfer number.
- [45] Set the checkpoint identifier expected to the value negotiated plus one.
- [46] PDU with the checkpoint identifier is sent as user data on a P-RESYNC(restart) response primitive with sync point serial number equal to those received on the P-RESYNC indication.
- [47] Preserve the primitive parameters for subsequent precessing. In some states, it happens that when F-CANCEL primitive is preserved, there is already an F-RESTART primitive preserved: in this case, the F-RESTART primitive shall be discarded.
- [48] Set the checkpoint identifier expected to 1.
- [49] Set the synchronization offset to the value of the NSPN minus the checkpoint identifier expected. ((In a bulk data transfer that does not involve recovery, the checkpoint identifier is zero, at this point in the protocol).

- [50] PDU is sent as user data on a P-RESYNCH (restart) request, with a synchronization point serial number equal to the sum of the checkpoint identifier, on the F-RESTART primitive, and the synchronization offset plus 1.
- [51] The checkpoint identifier shall be equal to the value received on the PDU.
- [52] Set the NSPN equal to the synch point serial number negotiated with the presentation service provider.
- [53] Store the synchronization point serial number provided by the presentation service provider as NSPN.

A.4.5 Predicates — bulk data transfer

- P8: The context is not within the defined context set.
- P13: The transfer service class has been negotiated and the bulk data transfer number is greater than 1.
- P14: The synchronization point exceeds 999 998, exceeding the session service limitation.
- P15: Discard indicator is set.
- P20: The resync functional unit has been negotiated.
- P21: The sync-minor functional unit has been negotiated.
- P22: The entity possesses the sync-minor token.
- P27: The outstanding checkpoint counter exceeds the agreed maximum.
- P41: The expected checkpoint identifier equals the sync point serial number received minus the offset.

A.4.6 Initiating state table — bulk data transfer

STATE																							
	D X F R I D L E	R E A - S Y M M I N - P D	R E S - S Y M M I N - P D	C A N - S Y M M I N - P D	R E A D	I - R E A D - E N D I N G	R - X F E R - E N D I N G	P - T O K E N - P D	W R T - S Y M C F - P D	R E S - S Y M C F - P D	C A N - S Y M C F - P D	W R I T E	I - W R I T E - E N D I N G	W - X F E R - E N D I N G	C A N C E L - P D	I - C A N C E L - P D	R R E S T A R T - P D	W R E S T A R T - P D	I - R R E S T A R T - P D	I - W R E S T A R T - P D	R E S T A R T - C A N - P D		
EVENT																							
I-REARQ	1	35																					
I-WRTRQ	2	36																					
P-TOKIN	42							3							42								
I-DATRQ									4			4											
I-DAERQ									5			5											
DATIN					6										41		41						
DAERQ					8										41		41						
I-TRERQ						9							10										
TRERP							11							3									
I-CANRQ			31	31	12	12			34	34		12					38	38	12	12			
CANRP															13								
CANRQ					14				14			14	14	14	15		14	14	14	14	39		
I-CANRP																16							
I-CHKRQ									17			17											
P-SYMCF									32	22	12	18	37	37	41								
P-SYMIN			29	21	12	19									41								
I-CHKRP					20	20																	
I-RESRQ			30		21	21			33			22											
RESRP																	23	24			40		
RESRQ					25				26			26	26	26			43	44					
I-RESRP																			27	28			

A.4.7 Initiating entity state table (Part 3) — detailed entries

- | | | | |
|----|---|---|---|
| 1: | ~P13 & P21:
~P13 & ~P21:
P13: | [44],
REARQ[2],P-TOKRQ,[48],[49]
REARQ[2]
L-ERRABT | ⇒ REA-SYMIN-PD
⇒ READ
⇒ <i>same state</i> |
| 2: | P13:
~P13 & ~P21:
~P13 & P21:
~P13 & P14 & P21:
~P13 & ~P14 & P21 | [44],
L-ERRABT
WRTRQ[16]
WRTRQ[2],[24],
L-ERRABT
P-SYMRQ,[48],[49] | ⇒ <i>same state</i>
⇒ WRITE

⇒ <i>same state</i>
⇒ WRT-SYMCF-PD |
| 3: | | I-TRECF | ⇒ DXFRIDLE |
| 4: | ~P8:
P8: | P-DATRQ[18]
L-ERRABT | ⇒ <i>same state</i>
⇒ <i>same state</i> |
| 5: | | DAERQ[16] | ⇒ I-WRITE-ENDING |
| 6: | P15:
~P15: | | ⇒ <i>same state</i>
⇒ <i>same state</i> |
| 8: | P15:
~P15: | | ⇒ <i>same state</i>
⇒ I-READ-ENDING |
| 9: | | TRERQ[2] | ⇒ R-XFER-ENDING |

10:		TRERQ[2]	⇒ W-XFER-ENDING
11:	P21: ~P21:	[15] I-TRECF	⇒ P-TOKEN-PD ⇒ DXFRIDLE
12:		[22],[23],CANRQ[26]	⇒ CANCEL-PD
13:	P20:	[53], [21],I-CANCF	⇒ DXFRIDLE
14:	P20:	[53], [22],[23], I-CANIN	⇒ I-CANCEL-PD
15:	P20:	CANRP[26],[53], [21],I-CANCF	⇒ DXFRIDLE
16:	P20:	[53], CANRP[26],[21]	⇒ DXFRIDLE
17:	~P14: P14:	[25],[27],[24], P-SYMRQ L-ERRABT	⇒ same state ⇒ same state
18:		I-CHKCF[19]	⇒ same state
19:	~P27 & P41: P27 ~P41:	[29], I-CHKIN,[24],[27] L-ERRABT	⇒ same state ⇒ same state
20:		[30],P-SYMRP[17]	⇒ same state
21:		[22],RESRQ[50]	⇒ RRESTART-PD
22:		[22],RESRQ[50]	⇒ WRESTART-PD
23:		[52],[45],[49],[21],I-RESCF	⇒ READ
24:		[52],[45],[49],[21],I-RESCF	⇒ WRITE
25:		[23],I-RESIN	⇒ I-RRESTART-PD
26:		I-RESIN	⇒ I-WRESTART-PD
27:		[52],[45],[49],RESRP[46]	⇒ READ
28:		[52],[45],[49],RESRP[46]	⇒ WRITE
29:		[24],[49],P-SYMRP	⇒ READ
30:		[47],[22]	⇒ RES-SYMIN-PD
31:		[47],[22]	⇒ CAN-SYMIN-PD
32:		[49]	⇒ WRITE
33:		[47],[22]	⇒ RES-SYMCF-PD
34:		[47],[22]	⇒ CAN-SYMCF-PD
35:		REARQ[2],P-TOKRQ,[49]	⇒ REA-SYMIN-PD
36:	P14: ~P14:	WTRQ[2],[24], L-ERRABT P-SYMRQ,[49]	⇒ same state ⇒ WRT-SYMCF-PD
37:		I-CHKCF[19]	⇒ same state
38:		[47]	⇒ RESTART-CAN-PD
39:	P20:	[52], [21],I-CANCF,CANRP[26]	⇒ DXFRIDLE
40:		CANRQ[26]	⇒ CANCEL-PD

41:		⇒ <i>same state</i>
42:		⇒ <i>same state</i>
43:	[52],[45],[49],[21],I-RESCF,RESRP[46]	⇒ READ
44:	[52],[45],[49],[21],I-RESCF,RESRP[46]	⇒ WRITE

NOTE – The entries 38, 39, 40 are due to the Session service behaviour in the resynchronize management, in collision cases.

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/AMD1:1992

A.4.8 Responding entity state table — bulk data transfer

[illegible]

A.4.9 Responding entity state table (Part 3) — detailed entries

1:	~P13 & P21: ~P13 & ~P21: P13:	[44], [15],[48],[49] I-REAIN L-ERRABT	⇒ P-TOKEN-PD ⇒ READ ⇒ <i>same state</i>
2:	~P13 & P21: ~P13 & ~P21: P13:	[44], I-WRTIN,[48],[49] I-WRTIN L-ERRABT	⇒ WRT-SYMIN-PD ⇒ WRITE ⇒ <i>same state</i>
3:	~P14: P14:	I-REAIN,[24], P-SYMRQ L-ERRABT	⇒ READ-SYMCF-PD ⇒ <i>same state</i>
4:	~P8: P8:	P-DATRQ[18] L-ERRABT	⇒ <i>same state</i> ⇒ <i>same state</i>
5:		DAERQ[2]	⇒ READ-ENDING
6:	P15: ~P15:		⇒ <i>same state</i> ⇒ <i>same state</i>
8:	P15: ~P15:		⇒ <i>same state</i> ⇒ WRITE-ENDING

9:	P15: ~P15:	I-TREIN	⇒ <i>same state</i> ⇒ I-R-XFR-ENDING
10:	P15: ~P15:	I-TREIN	⇒ <i>same state</i> ⇒ I-W-XFR-ENDING
11:	P21: ~P21:	TRE RP[2], P-TOKRQ TRE RP[2]	⇒ DXFRIDLE ⇒ DXFRIDLE
12:		[22],[23], CANRQ[26]	⇒ CANCEL-PD
13:	P21 & P22 & ~P20: P20:	P-TOKRQ, [53], [21], I-CANCF	⇒ DXFRIDLE
14:	P20:	[53], [22],[23], I-CANIN	⇒ I-CANCEL-PD
15:	P21 & P22 & ~P20: P20:	P-TOKRQ, [53], CANRP[26],[21]	⇒ DXFRIDLE
16:	~P14: P14:	[25],[27],[24] P-SYMRQ L-ERRABT	⇒ <i>same state</i> ⇒ <i>same state</i>
17:	~P27 & P41: P27 ~P41:	[29], I-CHKIN,[24],[27] L-ERRABT	⇒ <i>same state</i> ⇒ <i>same state</i>
18:		I-CHKCF[19]	⇒ <i>same state</i>
19:		[30], P-SYMRP[17]	⇒ <i>same state</i>
20:		[22], RESRQ[50]	⇒ RRESTART-PD
21:		[22], RESRQ[50]	⇒ WRESTART-PD
22:		[52],[45],[49],[21], I-RESCF	⇒ READ
23:		[52],[45],[49],[21], I-RESCF	⇒ WRITE
24:		I-RESIN	⇒ I-RRESTART-PD
25:		[23], I-RESIN	⇒ I-WRESTART-PD
26:		[52],[45],[49], RESRP[46]	⇒ READ
27:		[52],[45],[49], RESRP[46]	⇒ WRITE
28:		[49]	⇒ READ
29:		[22],[47]	⇒ RES-SYMCF-PD
30:		[22],[47]	⇒ CAN-SYMCF-PD
31:		[24],[49], P-SYMRP	⇒ WRITE
32:		[22],[47]	⇒ RES-SYMIN-PD
33:		[22],[47]	⇒ CAN-SYMIN-PD
34:		[24], P-SYMRP,[22], RESRQ[50]	⇒ WRESTART-PD
35:		[24], P-SYMRP,[22], CANRQ[26]	⇒ CANCEL-PD
36:		[15],[49]	⇒ P-TOKEN-PD
37:		I-WRTIN,[49]	⇒ WRT-SYMIN-PD
38:		I-CHKCF[19]	⇒ <i>same state</i>
39:		[22],[47]	⇒ RESTART-CAN-PD

40:	P21 & P22 & ~P20: P20:	P-TOKRQ, [53], [21],I-CANCF,CANRP[26]	⇒ DXFRIDLE
41:		CANRQ[26]	⇒ CANCEL-PD
42:			⇒ <i>same state</i>
43:		TRERP[2]	⇒ DXFRIDLE
44:	P21 & P22&~P20: P20:	P-TOKRQ, [53],CANRP[26], [21],I-CANCF	⇒ DXFRIDLE
45:		[52],[45],[49],[21],I-RESCF[51],RESRP[46]	⇒ READ
46:		[52],[45],[49],[21],I-RESCF,RESRP[46]	⇒ WRITE

NOTE – The entries 14, 39, 40, 41, 45, and 46 are due to the Session service behaviour in the resynchronize management, in collision cases.

A.5 File error recovery protocol machine (FERPM)

NOTE – The description of the file error recovery protocol machine given here omits the description of grouping, which does not materially affect the recovery behaviour. The transitions for the grouped cases can be derived from those in the basic protocol machine.

A.5.1 States — file error recovery

INIT-PD	Initialize pending, wait for an I-INICF event as an F-INITIALIZE confirm primitive from the IFS.
PASSIVE	The basic file protocol is currently in operation but no transfer of file contents is in progress. It is used when the FERPM becomes inactive in normal error free activity, or when it cannot provide its services any more after issuing an L-ERRABT signal.
XFER-IDLE	Data transfer idle.
XFER	Normal transfer of file contents has been established.
RESTART-PD	Restart pending, wait for an I-RESCF event as an F-RESTART confirm primitive from the IFS.
RESTART	A restart of a data transfer is in progress. A checkpoint identifier has been negotiated, and data following that checkpoint, but prior to the error, is being retransmitted.
CANCEL-PD	Cancel pending, wait for an I-CANCF event as an F-CANCEL confirm primitive from the IFS.
CLOSE-EX	Close expected, wait for an I-CLOIN event as an F-CLOSE indication primitive from the IFS.
DESELECT-EX	Deselect expected, wait for an I-DESN event as an F-DESELECT indication primitive from the IFS.
RECOVER-PD	Recover pending, wait for an I-RECCF event as an F-RECOVER confirm primitive from the IFS.
SEL-PD	SELECT pending, wait for an I-SELCF event as an F-SELECT confirm primitive from the IFS.
OPN-PD	OPEN pending, wait for an I-OPNCF event as an F-OPEN confirm primitive from the IFS.
SEL-EX	SELECT expected, wait for an I-SELIN event as an F-SELECT indication primitive from the IFS.
OPN-EX	OPEN expected, wait for an I-OPNIN event as an F-OPEN indication primitive from the IFS.
XFER-EX	Data transfer expected, wait for an I-REAIN/I-WRTIN as an F-READ/F-WRITE indication primitive from the IFS.
INIT-EX	Initiation expected, wait for an I-ININ event as an F-INITIALIZE indication primitive from the IFS.
CLOSE-PD	Close pending, wait for an I-CLOCF event as an F-CLOSE confirm primitive from the IFS.
DESELECT-PD	Deselect pending, wait for an I-DESCF event as an F-DESELECT confirm primitive from the IFS.

A.5.2 Incoming events — file error recovery

A.5.2.1 Incoming events from the external file service user

F-OPNRQ	F-OPEN request primitive
F-CLOREQ	F-CLOSE request primitive
F-REARQ	F-READ request primitive
F-WRTRQ	F-WRITE request primitive
F-DATRQ	F-DATA request primitive
F-DAERQ	F-DATA-END request primitive
F-TRERQ	F-TRANSFER-END request primitive
F-ANYRQ	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-BEGIN-GROUP, F-END-GROUP, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE and F-ABORT request primitives
F-OPNRP	F-OPEN response primitive
F-CLORP	F-CLOSE response primitive

F-TRERP	F-TRANSFER-END response primitive
F-ANYRP	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-BEGIN-GROUP, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE and F-END-GROUP response primitives
F-CANRQ	F-CANCEL request primitive
F-CANRP	F-CANCEL response primitive

A.5.2.2 Incoming events from the internal file service

I-INICF	F-INITIALIZE confirm primitive
I-OPNCF	F-OPEN confirm primitive
I-CLOCF	F-CLOSE confirm primitive
I-DATIN	F-DATA indication primitive
I-DAEIN	F-DATA-END indication primitive
I-CHKIN	F-CHECK indication primitive
I-CHKCF	F-CHECK confirm primitive
I-TRECF	F-TRANSFER-END confirm primitive
I-ANYCF	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-BEGIN-GROUP, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE and F-END-GROUP confirm primitive
I-SELCF	F-SELECT confirm primitive
I-DESCF	F-DESELECT confirm primitive
I-INIIN	F-INITIALIZE indication primitive
I-SELIN	F-SELECT indication primitive
I-DESIN	F-DESELECT indication primitive
I-OPNIN	F-OPEN indication primitive
I-CLOIN	F-CLOSE indication primitive
I-TREIN	F-TRANSFER-END indication primitive
I-CANIN	F-CANCEL indication primitive
I-CANCF	F-CANCEL confirm primitive
I-PABIN	F-P-ABORT indication primitive
I-RECCF	F-RECOVER confirm primitive
I-RESCF	F-RESTART confirm primitive
I-RECIN	F-RECOVER indication primitive
I-RESIN	F-RESTART indication primitive
I-ANYIN	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-BEGIN-GROUP, F-END-GROUP, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE, F-U-ABORT and F-P-ABORT indication primitives
I-REAIN	F-READ indication primitive
I-WRTIN	F-WRITE indication primitive

A.5.2.3 Incoming events from the Local System Environment

L-ERROR1	Class I error (as defined in 18.1)
----------	------------------------------------

L-ERROR2	Class II error (as defined in 18.1)
L-ERROR3	Class III error (as defined in 18.1)
L-GIVEUP	Signal to give up recovery process
L-DATRQ	Reissued F-DATA request primitive
L-CHKRQ	Reissued F-CHECK request primitive
L-DAERQ	Reissued F-DATA-END request primitive
L-EORIN	Indicates that all checkpoint identifiers and "data end" markers in the docket have been used, and all data to be resent have been sent.
L-HOLD	Signal to the FERPM to hold any primitive from the external user for later processing
L-UNHOLD	Signal to FERPM to process any previous held primitives

A.5.3 Outgoing events — file error recovery

A.5.3.1 Outgoing events to the external file service user

F-OPNCF	F-OPEN confirm primitive
F-ANYCF	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE, F-BEGIN-GROUP and F-END-GROUP confirm primitives
F-CLOCF	F-CLOSE confirm primitive
F-DATIN	F-DATA indication primitive
F-DAEIN	F-DATA-END indication primitive
F-TRECF	F-TRANSFER-END confirm primitive
F-OPNIN	F-OPEN indication primitive
F-WRTIN	F-WRITE indication primitive
F-CLOIN	F-CLOSE indication primitive
F-REAIN	F-READ indication primitive
F-TREIN	F-TRANSFER-END indication primitive
F-ANYIN	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE, F-BEGIN-GROUP, F-END-GROUP, F-U-ABORT and F-P-ABORT indication primitives
F-PABIN	F-P-ABORT indication primitive
F-CANIN	F-CANCEL indication primitive
F-CANCF	F-CANCEL confirm primitive

A.5.3.2 Outgoing events to the internal file service

I-SELRQ	F-SELECT request primitive
I-OPNRQ	F-OPEN request primitive
I-CLOLRQ	F-CLOSE request primitive
I-DATRQ	F-DATA request primitive
I-DAERQ	F-DATA-END request primitive
I-CHKRQ	F-CHECK request primitive
I-TRERQ	F-TRANSFER-END request primitive
I-REARQ	F-READ request primitive
I-WRTRQ	F-WRITE request primitive

I-ANYRQ	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE, F-BEGIN-GROUP, F-END-GROUP and F-ABORT request primitives
I-INIRP	F-INITIALIZE response primitive
I-OPNRP	F-OPEN response primitive
I-SELRP	F-SELECT response primitive
I-CLORP	F-CLOSE response primitive
I-TRERP	F-TRANSFER-END response primitive
I-ANYRP	F-INITIALIZE, F-READ-ATTRIBUTE, F-CHANGE-ATTRIBUTE, F-SELECT, F-CREATE, F-DESELECT, F-LOCATE, F-ERASE, F-TERMINATE, F-LIST, F-CHANGE-PREFIX, F-GROUP-SELECT, F-GROUP-COPY, F-GROUP-MOVE, F-GROUP-LIST, F-LINK, F-CREATE-DIRECTORY, F-SELECT-ANOTHER, F-UNLINK, F-GROUP-DELETE, F-BEGIN-GROUP and F-END-GROUP response primitives
I-CHKRP	F-CHECK response primitive
I-RESRQ	F-RESTART request primitive
I-RESRP	F-RESTART response primitive
I-CANRQ	F-CANCEL request primitive
I-CANRP	F-CANCEL response primitive
I-DESRQ	F-DESELECT request primitive
I-RECRQ	F-RECOVER request primitive
I-INIRQ	F-INITIALIZE request primitive
I-RECRP	F-RECOVER response primitive
I-DESRP	F-DESELECT response primitive

A.5.3.3 Outgoing events to the local system environment

L-ERROR2	Signal indicating class II error
L-ERROR3	Signal indicating class III error
L-RESEND	Resend data request to the local system
L-STPSND	Stop resending data and checkpoint requests to the local system
L-SUSPND	Suspend issuing of F-DATRQ, F-DAERQ by the local system
L-RESUME	Resume issuing of F-DATRQ, F-DAERQ by the local system
L-ERRABT	Signal FPM to issue an F-P-ABORT request PDU, with permanent error value.
L-PABORT	Signal FPM to issue a F-P-ABORT request PDU, and a F-P-ABORT indication primitive to the FERPM, both with transient error value.
L-HOLD	Hold primitives from external user
L-UNHOLD	Process any held primitives

A.5.4 Specific actions — file error recovery

- [54] Mark the checkpoint identifiers to be reissued.
- [55] Delete the docket.
- [56] Set the activity state indicator to "finished".
- [57] Set the activity state indicator to "in-progress".
- [58] Set the activity type indicator to "read".
- [59] Set the activity type indicator to "write".

- [60] Add the checkpoint identifier to the list in the docket. Increment the count of outstanding checkpoints by one.
- [61] Delete from the docket all checkpoint identifiers smaller than the parameter in the primitive received or issued. Decrement the count of outstanding checkpoints by the number of the deleted identifiers.
- [63] Set the activity state indicator to "starting".
- [64] Set the activity state indicator to "data transfer finished".
- [66] Use the last checkpoint identifier in the docket as the parameter.
- [67] Increment the checkpoint identifier count.
- [68] Set the checkpoint identifier count to zero.
- [69] Record the bulk data transfer number in the docket (the number is maintained by the FPM).
- [70] Record which data values have been already delivered to the user.
- [71] Use as the parameter the checkpoint identifier available in the docket that is both
 - a) after the checkpoint identifier negotiated, and
 - b) not yet reissued during this restart of the BDT.
- [72] Use as parameter the checkpoint identifier.
- [73] Use as the parameter the oldest (first) checkpoint identifier in the list in the docket.
- [74] Use as the parameter the checkpoint identifier of the primitive received.
- [75] Use as the diagnostics parameter "activity identifier unknown".
- [76] Record which data values have been sent.
- [77] Create a docket and record in it the activity identifier, the information needed to issue or check an I-INIRQ (including the locations of the initiator and responder), the recovery mode, the access context, the presentation context, a null checkpoint list and set the activity state indicator to "starting".
- [78] The issuer of the I-RESRQ or I-RECRQ primitive identifies a checkpoint identifier which is
 - a) for the sender, the last point acknowledged,
 - b) for the receiver, the last point received and secured.
- [79] The issuer of the I-RESRP primitive identifies a checkpoint identifier which is
 - c) for the sender, equal to the value provided by the issuer of the request, and
 - d) for the receiver, the last point received and secured.
- [200] Wait for 2^{Recommended retry time} seconds.
- [201] Include a state result indicating failure.
- [202] Use the data value specified by the L-DATRQ signal, representing previous F-DATA request primitives, as the parameter.
- [203] Use as the parameter the checkpoint identifier negotiated.
- [204] Store "data end" marker in the docket.
- [206] Delete "data end" marker in the docket.
- [207] Include an action result indicating transient error.
- [209] Recreate select and open regimes.
- [210] Include a action result indicating failure on next response with diagnostic of damage to open/select regime.
- [211] Include a diagnostic of damage to open/select regime.
- [212] Use as the parameter the bulk data transfer number recorded in the docket.
- [213] Store "transfer end" marker (reflecting information on the PDU) in the docket.
- [214] Delete "transfer end" marker from docket.
- [215] Clear activity type indicator.
- [216] Clear the activity state indicator.

A.5.5 Predicates — file error recovery

- P23: The incoming response or confirm primitive has a state result indicating success.
- P24: There are checkpoints that must be confirmed.
- P26: An F-DATA indication primitive corresponding to the incoming I-DATIN has already been issued to the user.
- P28: The data value available is after the negotiated checkpoint.
- P29: The activity state indicator is set to "in-progress" and the activity type indicator to "read".
- P30: The activity state indicator is set to "in-progress" and the activity type indicator to "write".
- P31: The activity type indicator is set to "read".
- P32: The activity type indicator is set to "write".
- P33: The activity state indicator is set to "starting".
- P34: The activity state indicator is set to "finished".
- P37: A checkpoint identifier is to be inserted in the data stream.
- P39: The entity has the docket for the activity identifier recovered, the current initiator matches the location, and the activity can be resumed.
- P40: The entity is sender of data.
- P99: The transfer service class has been negotiated.
- P100: The recommended retry time field is present on the diagnostic parameter.
- P101: The specified recovery is possible and is required.
- P102: The specified association is possible.
- P103: The incoming request or indication primitive has an action result indicating transient error.
- P104: The "transfer end" marker is stored in the docket.
- P105: The activity state indicator is set to "data transfer finished".
- P106: The "data end" marker is stored in the docket.

A.5.6 Initiating entity state table — FERPM — (normal procedure)

STATE	P A S S I V E	X F E R - I D L E	X F E R
EVENT			
F-OPNRQ	1		
I-OPNCF	2		
F-ANYRQ	3	3	
I-ANYCF	4	4	
F-CLORQ		5	
I-CLOCF		6	
F-REARQ		7	
F-WRTRQ		8	
F-DATRQ			9
I-DATIN			10
I-CHKCF			11
I-CHKIN			12
F-DAERQ			13
I-DAEIN			14
F-TRERQ			15
I-TRECF			16
F-CANRQ			17
I-CANCF			18
I-CANIN			19
F-CANRP			20

A.5.7 Initiating entity state table — FERPM — detailed entries (normal procedure)

1:	[77], I-OPNRQ	⇒ same state
2:	P23: F-OPNCF ~P23: [55], F-OPNCF[201]	⇒ XFER-IDLE ⇒ same state
3:	I-ANYRQ	⇒ same state
4:	F-ANYCF	⇒ same state
5:	[56], I-CLORQ	⇒ same state
6:	[55], F-CLOCF	⇒ PASSIVE
7:	[57], [58], [68], I-REARQ, [69]	⇒ XFER
8:	[57], [59], [68], I-WRTRQ, [69]	⇒ XFER
9:	P37: [67], [60], I-CHKRQ[72], [76], I-DATRQ	⇒ same state
10:	[70], F-DATIN	⇒ same state
11:	[61]	⇒ same state
12:	P24: [60], I-CHKRP, [61],	⇒ same state
13:	[204], I-DAERQ	⇒ same state
14:	P24: I-CHKRP[66], [61], [204], F-DAEIN	⇒ same state

15:	P29:	[64], [213],I-TRERQ	⇒ <i>same state</i>
16:	~P99: P99:	[63], [64], [215],[206],[214],F-TRECF	⇒ XFER-IDLE
17:		I-CANRQ	⇒ <i>same state</i>
18:		[215],[216],[206],[214],F-CANCF	⇒ XFER-IDLE
19:		F-CANIN	⇒ <i>same state</i>
20:		[215],[216],[206],[214],I-CANRP	⇒ XFER-IDLE

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/Amd.1:1992

A.5.8 Responding entity state table — FERPM — (normal procedure)

STATE	P A S S I V E	X F E R - I D L E	X F E R
EVENT			
I-OPNIN	1		
F-OPNRP	2		
F-ANYRP	3	3	
I-ANYIN	4	4	
I-CLOIN		5	
F-CLORP		6	
I-REAIN		7	
I-WRTIN		8	
F-DATRQ			9
I-DATIN			10
I-CHKCF			11
I-CHKIN			12
F-DAERQ			13
I-DAEIN			14
I-TREIN			15
F-TRERP			16
F-CANRQ			17
I-CANCF			18
I-CANIN			19
F-CANRP			20

A.5.9 Responding entity state table — FERPM — detailed entries (normal procedure)

1:	[77], F-OPNIN	⇒ same state
2:	P23: I-OPNRP	⇒ XFER-IDLE
	~P23: [55], I-OPNRP[201]	⇒ same state
3:	I-ANYRP	⇒ same state
4:	F-ANYIN	⇒ same state
5:	~P103: [56], F-CLOIN	⇒ same state
6:	[55], I-CLORP	⇒ PASSIVE
7:	[57], [58], [68], F-REAIN, [69]	⇒ XFER
8:	[57], [59], [68], F-WRTIN, [69]	⇒ XFER
9:	P37: [67], [60], I-CHKRQ[72], [76], I-DATRQ	⇒ same state
10:	[70], F-DATIN	⇒ same state
11:	[61]	⇒ same state
12:	P24: [60], I-CHKRP, [61],	⇒ same state
13:	[204], I-DAERQ	⇒ same state
14:	P24: I-CHKRP[66], [61], [204], F-DAEIN	⇒ same state

15:	P29:	[64], [213],F-TREIN	⇒ <i>same state</i>
16:	~P99: P99:	[63], [64], [213],[214],[206],I-TRETP	⇒ XFER-IDLE
17:		I-CANRQ	⇒ <i>same state</i>
18:		[215],[216],[206],[214],F-CANCF	⇒ XFER-IDLE
19:		F-CANIN	⇒ <i>same state</i>
20:		[215],[216],[206],[214],I-CANRP	⇒ XFER-IDLE

NOTE – The condition P103 in entry 6 is handled in A.5.17 (in entry 16).

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/Amd.1:1992

A.5.10 Initiating entity state table — FERPM — (class I errors)

STATE		R E S T A R T - P D	R E S T A R T
EVENT	X F E R		
L-ERROR1	1		1
I-RESCF		2	
I-RESIN	3		
I-DATIN			4
I-CHKCF			6
I-DAEIN			7
L-DATRQ			9
L-CHKRQ			10
L-DAERQ			11
L-EORIN			12
I-CANIN		13	13
I-CANCF		14	14
F-CANRQ		15	15
F-CANRP		16	16

A.5.11 Initiating entity state table — FERPM — detailed entries (class I errors)

- 1: P101 & P40: L-SUSPND, I-RESRQ[78] ⇒ RESTART-PD
P101 & ~P40: I-RESRQ[78] ⇒ RESTART-PD
~P101: L-ERROR2 ⇒ XFER
- 2: ~P40: [61] ⇒ RESTART
P40: [54],[61], L-RESEND[74] ⇒ RESTART
- 3: ~P40: I-RESRP[79] ⇒ RESTART
P40: L-SUSPND,[54],[61], I-RESRP[79], L-RESEND[203] ⇒ RESTART
- 4: P26: ⇒ same state
~P26: F-DATIN ⇒ XFER
- 6: [61] ⇒ same state
- 7: P24: I-CHKRP[66],[61],
~P106: F-DAEIN ⇒ XFER
P106 & ~P104: L-UNHOLD ⇒ XFER
P106 & P104: L-UNHOLD, I-TRERQ ⇒ XFER
- 9: P28: I-DATRQ[202] ⇒ same state
~P28: ⇒ same state
- 10: I-CHKRQ[71] ⇒ same state
- 11: I-DAERQ, L-UNHOLD ⇒ same state
- 12: ~P104: L-RESUME ⇒ XFER
P104: I-TRERQ, L-RESUME ⇒ XFER
- 13: ~P103&~P40: F-CANIN ⇒ same state
~P103&P40: L-STPSND, F-CANIN ⇒ same state
- 14: ~P103: [215],[216],[206],[214], F-CANCF ⇒ XFER-IDLE
- 15: ~P40: I-CANRQ ⇒ same state
P40: L-STPSND, I-CANRQ ⇒ same state

16: [215],[216],[206],[214],I-CANRP ⇒ XFER-IDLE

NOTE – The condition P103 in entries 13 and 14 is handled in entries 2 and 3 of A.5.14.

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/AMD1:1992

A.5.12 Responding entity state table — FERPM — (class I errors)

STATE		R E S T A R T - P D	R E S T A R T
EVENT	X F E R		
L-ERROR1	1		1
I-RESCF		2	
I-RESIN	3		
I-DATIN			4
I-CHKCF			6
I-DAEIN			7
L-DATRQ			9
L-CHKRQ			10
L-DAERQ			11
L-EORIN			12
I-TREIN			13
I-CANIN		14	14
I-CANCF		15	15
F-CANRQ		16	16
F-CANRP		17	17

A.5.13 Responding entity state table — FERPM — detailed entries (class I errors)

1:	P101 & P40: L-SUSPND, I-RESRQ[78] P101 & ~P40: I-RESRQ[78] ~P101: L-ERROR2	⇒ RESTART-PD ⇒ RESTART-PD ⇒ XFER
2:	~P40: [61] P40: [54],[61], L-RESEND[74]	⇒ RESTART ⇒ RESTART
3:	~P40: I-RESRP[79] P40: L-SUSPND,[54],[61], I-RESRP[79], L-RESEND[203]	⇒ RESTART ⇒ RESTART
4:	P26: ~P26: F-DATIN	⇒ same state ⇒ XFER
6:	[61]	⇒ same state
7:	P24: I-CHKRP[66],[61], ~P106: F-DAEIN P106 & P104: P106 & ~P104:	⇒ XFER ⇒ same state ⇒ XFER
9:	P28: I-DATRQ[202] ~P28:	⇒ same state ⇒ same state
10:	I-CHKRQ[71]	⇒ same state
11:	I-DAERQ[206]	⇒ same state
12:	~P104: L-RESUME P104: L-RESUME	⇒ XFER ⇒ same state
13:	L-UNHOLD	⇒ XFER
14:	~P103 & ~P40: F-CANIN ~P103 & P40: L-STPSND, F-CANIN	⇒ same state ⇒ same state
15:	~P103: [215],[216],[206],[214], F-CANCF	⇒ XFER-IDLE

16:	~P40:	I-CANRQ	⇒ <i>same state</i>
	P40:	L-STPSND, I-CANRQ	⇒ <i>same state</i>
17:		[215],[216],[206],[214], I-CANRP	⇒ XFER-IDLE

NOTE – The condition P103 in entries 13 and 14 is handled in entries 2 and 3 of A.5.16

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/AMD1:1992

A.5.14 Initiating entity state table — FERPM — detailed entries — (class II and III errors)

STATE												
EVENT	X F E R	R E S T A R T - P D	R E S T A R T - P D	C A N C E L - P D	C L O S E - P D	D E S E L E C T - P D	R E C O V E R - P D	I N I T - P D	P A S S I V E - P D	S E L - P D	O P N - P D	X F E R - I D L E
L-ERROR2	1	1	1									11
I-CANIN	2	2	2									
I-CANCF				3								
I-CLOCF					4							
I-DESCF						5						
I-RECCF							6					
L-ERROR3	7	7	7	7	7	7	7		7	7	7	7
I-PABIN	12	12	12	12	12	12	12		12	12	12	12
I-SELCF										9		
I-OPNCF											10	
I-INICF								8				

A.5.15 Initiating entity state table — FERPM — detailed entries (class II and III errors)

- 1: ~P101 & P104: L-ERROR3 ⇒ same state
~P101: [55], L-ERRABT ⇒ PASSIVE
P101 & ~P40 & ~P106: I-CANRQ[207] ⇒ CANCEL-PD
P101 & P40: L-SUSPND, I-CANRQ[207] ⇒ CANCEL-PD
P101 & ~P40 & P106: I-CANRQ[207], L-HOLD ⇒ CANCEL-PD
- 2: P103 & ~P40: I-CANRP, I-CLORQ ⇒ CLOSE-PD
P103 & P40: L-SUSPND, I-CANRP, I-CLORQ ⇒ CLOSE-PD
- 3: I-CLORQ ⇒ CLOSE-PD
- 4: I-DESRQ ⇒ DESELECT-PD
- 5: I-RECRQ[212][78] ⇒ RECOVER-PD
- 6: P23 & (P29 | P31) & ~(P30 | P32): [209], I-REARQ ⇒ RESTART
P23 & (P30 | P32) & ~(P29 | P31): [209], I-WRTRQ, L-RESEND[74] ⇒ RESTART
~P23 & ~P33 & P34: [55], F-CLOCF[211], L-ERRABT ⇒ PASSIVE
~P23 & P33 & ~P34: L-HOLD, I-SELRQ ⇒ SEL-PD
~P23 & P101 & ~(P34 | P33) & (P29 | P30 | P31 | P32): I-RECRQ[212][78] ⇒ same state
~P23 & ~P101 & ~(P34 | P33 | P105) & (P29 | P30 | P31 | P32): [55], L-ERRABT ⇒ PASSIVE
~P23 & ~P33 & ~P34 & P105 & P99: [55], F-TRECF[211], L-ERRABT ⇒ PASSIVE
~P23 & ~P33 & ~P34 & P105 & ~P99: F-TRECF, I-SELRQ, [215], [206], [214] ⇒ SEL-PD
- 7: P106: L-HOLD,
P40: L-SUSPND,
P100 & P101: L-PABORT, [200], I-INIRQ ⇒ INIT-PD
~P100 & P101: L-PABORT, I-INIRQ ⇒ INIT-PD
~P101: [55], L-ERRABT ⇒ PASSIVE
- 8: P23 & ~P31 & P32: I-RECRQ[73][212] ⇒ RECOVER-PD
P23 & P31 & ~P32: I-RECRQ[66][212] ⇒ RECOVER-PD
~P23 & P102: [200], I-INIRQ ⇒ same state
~P23 & ~P102: [55], L-ERRABT ⇒ PASSIVE
- 9: P23: I-OPNRQ ⇒ OPN-PD
~P23: [55], L-ERRABT ⇒ PASSIVE

10: P23: ~P23:	L-UNHOLD [55], L-ERRABT	⇒ XFER-IDLE ⇒ PASSIVE
11: ~P101: P101:	[55], L-ERRABT L-HOLD, I-CLORQ[211]	⇒ PASSIVE ⇒ CLOSE-PD
12: P106: P40 & P103 & P100 & P101: ~P40 & P103 & P100 & P101: P40 & P103 & ~P100 & P101: ~P40 & P103 & ~P100 & P101: ~P103 ~P101:	L-HOLD, L-SUSPND, [200], I-INIRQ [200], I-INIRQ L-SUSPND, I-INIRQ I-INIRQ [55], F-PABIN	⇒ INIT-PD ⇒ INIT-PD ⇒ INIT-PD ⇒ INIT-PD ⇒ PASSIVE

NOTES

- 1 To avoid recovery procedures that never terminate the action in entry 6 by the condition P101 or ~P101 effectively allowing the local system to determine the number of times a recovery from any one error will be attempted.
- 2 The condition P101 in entries 12 and 7 includes the test when FQOS is zero but the FERPM is not null.
- 3 The condition ~P103 in entry 2 implies that this event is not relevant to the FERPM and that normal actions take over.
- 4 The predicates which model the activity state indicator are mutually exclusive, so that combinations of them cannot occur. These combinations are not included in the state table entries.

A.5.16 Responding entity state table — FERPM — (class II and III errors)

STATE												
EVENT	X F E R	R E S T A R T - P D	R E S T A R T	C A N C E L - P D	C L O S E - E X	D E S E L E C T - E X	P A S S I V E	X F E R - E X	I N I T - E X	S E L - E X	O P N - E X	X F E R - I D L E
L-ERROR2	1	1	1				14					
I-CANIN	2	2	2									
I-CANCF				3								
I-CLOIN					4							16
I-DESIN						5						
I-RECIN							6					
L-ERROR3	7	7	7	7	7	7	7	7		7	7	7
I-PABIN	17	17	17	17	17	17	17	17		17	17	17
L-GIVEUP							12					
I-INIIN									8			
I-REAIN								13				
I-WRTIN								9				
I-SELIN										10		
I-OPNIN											11	

A.5.17 Responding entity state table — FERPM — detailed entries (class II and III errors)

1:	~P101 & P104: ~P101: P101 & P40: P101 & ~P40 & ~P104: P101 & ~P40 & P104:	L-ERROR3 [55],L-ERRABT L-SUSPND,I-CANRQ[207] I-CANRQ[207] I-CANRQ[207],L-HOLD	⇒ same state ⇒ PASSIVE ⇒ CANCEL-PD ⇒ CANCEL-PD ⇒ CANCEL-PD
2:	P103 & P40: P103 & ~P40:	L-SUSPND,I-CANRP I-CANRP	⇒ CLOSE-EX ⇒ CLOSE-EX
3:			⇒ CLOSE-EX
4:		I-CLORP	⇒ DESELECT-EX
5:		I-DESRP	⇒ PASSIVE
6:	P101 & P31 & ~P32 & ~P33 & P39: P101 & ~P31 & P32 & ~P33 & P39: P101 & ~P31 & ~P32 & P33 & P39: P101 & ~P31 & ~P32 & ~P33 & P39: P101 & ~P39: ~P101:	[209],I-RECRP[74] [209],I-RECRP[66] I-RECRP[201] I-RECRP[201] I-RECRP[75][201] I-RECRP[201]	⇒ XFER-EX ⇒ XFER-EX ⇒ SEL-EX ⇒ same state ⇒ same state ⇒ same state
7:	P104: P101 & ~P40: P101 & P40: ~P101:	L-HOLD, L-PABORT L-PABORT,L-SUSPND [55],L-ERRABT	⇒ INIT-EX ⇒ INIT-EX ⇒ PASSIVE
8:	P102: ~P102:	I-INIRP I-INIRP[201]	⇒ PASSIVE ⇒ PASSIVE
9:	P30: ~P30:	[55],L-ERRABT	⇒ RESTART ⇒ PASSIVE
10:		L-SELRP	⇒ OPN-EX
11:		L-UNHOLD,I-OPNRP	⇒ XFER-IDLE

12:		[55],L-ERRABT	⇒ <i>same state</i>
13:	P29:	L-RESEND[203]	⇒ RESTART
	~P29:	[55],L-ERRABT	⇒ PASSIVE
14:	P101:	[210],L-HOLD	⇒ <i>same state</i>
	~P101:	[55],L-ERRABT	⇒ <i>same state</i>
16:	P103	I-CLORP,L-HOLD	⇒ DESELECT-EX
17:	P104:	L-HOLD,	⇒ INIT-EX
	P103 & P101 & P40:	L-SUSPND	⇒ INIT-EX
	P103 & P101 & ~P40:		⇒ INIT-EX
	~P103 ~P101:	[55],F-PABIN	⇒ PASSIVE

NOTES

- 1 The condition P101 in entries 7 and 17 includes the test when FQOS is zero but the FERPM is not null.
- 2 The condition ~P103 in entries 2 and 16 implies that this event is not relevant to the FERPM and that normal actions take over.
- 3 The predicates which model the activity state indicator are mutually exclusive, so that combinations of them cannot occur. These combinations are not included in the state table entries.

STANDARDSISO.COM : Click to view the full PDF of ISO 8571-4:1988/Amd.1:1992

Replace clause C.1 in annex C with the following:

AND-Set	Declared at line: referenced at:	1023 (TYP), 1021, 1023
Abstract-Syntax-Name	Declared at line: referenced at:	407 (TYP), 99, 258, 259, 315, 316, 407, 691
Access-Context	Declared at line: referenced at:	409 (TYP), 368, 409
Access-Control-Attribute	Declared at line: referenced at:	633 (TYP), 519, 520, 607, 608, 633
Access-Control-Change-Attribute	Declared at line: referenced at:	640 (TYP), 469, 470, 640
Access-Control-Element	Declared at line: referenced at:	654 (TYP), 637, 645, 648, 654
Access-Passwords	Declared at line: referenced at:	423 (TYP), 147, 182, 305, 423, 658, 796, 807, 821, 853, 871, 922, 969, 985
Access-Request	Declared at line: referenced at:	439 (TYP), 146, 181, 304, 439,

Account	Declared at line: referenced at:	655, 820, 906, 921 449 (TYP), 27, 154, 189, 449, 681, 827, 908, 926
Account-Attribute	Declared at line: referenced at:	677 (TYP), 465, 515, 590, 677
Action-Result	Declared at line: referenced at:	451 (TYP), 35, 109, 113, 158, 170, 193, 202, 215, 228, 263, 280, 285, 320, 337, 345, 380, 387, 392, 397, 451, 800, 814, 831, 840, 859, 877, 888, 897, 912, 930, 940, 951, 959, 974, 990

Activity-Identifier	Declared at line: referenced at:	456 (TYP), 249, 302, 456
Application-Entity-Title	Declared at line: referenced at:	458 (TYP), 458, 659
Attribute-Extension-Names	Declared at line: referenced at:	995 (TYP), 209, 810, 884, 947, 995
Attribute-Extension-Set	Declared at line: referenced at:	1003 (TYP), 1001, 1003
Attribute-Extension-Set-Name	Declared at line: referenced at:	997 (TYP), 995, 997
Attribute-Extensions	Declared at line: referenced at:	1001 (TYP), 477, 527, 615, 1001
Attribute-Extensions-Pattern	Declared at line: referenced at:	1133 (TYP), 1057, 1133
Attribute-Groups	Declared at line: referenced at:	83 (TYP), 22, 42, 83
Attribute-Names	Declared at line: referenced at:	1190 (TYP), 208, 809, 883, 946, 1190
Attribute-Value-Assertions	Declared at line: referenced at:	1015 (TYP), 805, 819, 1015
Bitstring-Pattern	Declared at line: referenced at:	1099 (TYP), 1027, 1099
Boolean-Pattern	Declared at line: referenced at:	1116 (TYP), 1048, 1116
Bulk-Data-PDU	Declared at line: referenced at:	348 (TYP), 5, 348
Change-Attributes	Declared at line: referenced at:	461 (TYP), 225, 229, 461,

		856, 874, 956, 960, 971, 976, 987, 992
Charging	Declared at line: referenced at:	483 (TYP), 106, 171, 204, 483, 841, 942
Child-Objects-Attribute	Declared at line: referenced at:	759 (TYP), 585, 759
Concurrency-Access	Declared at line: referenced at:	661 (TYP), 656, 661
Concurrency-Control	Declared at line: referenced at:	488 (TYP), 152, 187, 244, 265, 488, 823, 924
Concurrency-Key	Declared at line: referenced at:	671 (TYP), 662, 663, 664, 665, 666, 667, 668, 669, 671
Constraint-Set-Name	Declared at line: referenced at:	504 (TYP), 504, 690
Contents-Type-Attribute	Declared at line: referenced at:	683 (TYP), 243, 264, 321, 513, 581, 683
Contents-Type-List	Declared at line: referenced at:	97 (TYP), 25, 45, 97
Contents-Type-Pattern	Declared at line:	1123 (TYP),

	referenced at:	1028, 1123
Create-Attributes	Declared at line:	506 (TYP),
	referenced at:	179, 194, 506, 904, 913, 918, 931
Date-and-Time-Attribute	Declared at line:	693 (TYP),
	referenced at:	591, 593, 595, 597, 693
Date-and-Time-Pattern	Declared at line:	1104 (TYP),
	referenced at:	1035, 1037, 1039, 1041, 1104
Destination-File-Directory	Declared at line:	1145 (TYP),
	referenced at:	795, 801, 847, 860, 865, 878, 964, 975, 980, 991, 1145
Diagnostic	Declared at line:	531 (TYP),
	referenced at:	46, 110, 114, 164, 175, 196, 205, 222, 232, 267, 282, 287, 327, 339, 346, 381, 389, 394, 399,

		531, 802, 816, 833, 844, 862, 880, 890, 901, 915, 934, 943, 953, 961, 977, 993
Document-Type-Name	Declared at line: referenced at:	554 (TYP), 98, 554, 685
Entity-Reference	Declared at line: referenced at:	543 (TYP), 538, 539, 543
Equality-Comparision	Declared at line: referenced at:	1061 (TYP), 1061, 1087, 1093, 1100, 1113, 1117, 1120
Error-Action	Declared at line: referenced at:	1156 (TYP), 851, 869, 1156
Extension-Attribute	Declared at line: referenced at:	1007 (TYP), 1005, 1007
Extension-Attribute-Identifier	Declared at line: referenced at:	1013 (TYP), 999, 1008, 1013, 1136
Extension-Set-Identifier	Declared at line: referenced at:	1011 (TYP), 998, 1004, 1011, 1134
F-BEGIN-GROUP-request	Declared at line: referenced at:	289 (TYP), 133, 289
F-BEGIN-GROUP-response	Declared at line: referenced at:	292 (TYP), 134,

F-CANCEL-request	Declared at line: referenced at:	292 391 (TYP), 360, 391
F-CANCEL-response	Declared at line: referenced at:	396 (TYP), 361, 396
F-CHANGE-ATTRIB-request	Declared at line: referenced at:	224 (TYP), 127, 224
F-CHANGE-ATTRIB-response	Declared at line: referenced at:	227 (TYP), 128, 227
F-CHANGE-LINK-ATTRIB-request	Declared at line: referenced at:	955 (TYP), 786, 955
F-CHANGE-LINK-ATTRIB-response	Declared at line: referenced at:	958 (TYP), 787, 958
F-CHANGE-PREFIX-request	Declared at line: referenced at:	793 (TYP), 762, 793
F-CHANGE-PREFIX-response	Declared at line: referenced at:	799 (TYP), 763, 799
F-CLOSE-request	Declared at line: referenced at:	279 (TYP), 131, 279
F-CLOSE-response	Declared at line: referenced at:	284 (TYP), 132, 284
F-COPY-request	Declared at line: referenced at:	979 (TYP), 790, 979
F-COPY-response	Declared at line: referenced at:	989 (TYP), 791, 989
F-CREATE-DIRECTORY-request	Declared at line: referenced at:	903 (TYP), 778, 903
F-CREATE-DIRECTORY-response	Declared at line: referenced at:	910 (TYP), 779, 910
F-CREATE-request	Declared at line: referenced at:	177 (TYP), 121, 177
F-CREATE-response	Declared at line: referenced at:	191 (TYP), 122, 191
F-DATA-END-request	Declared at line: referenced at:	379 (TYP), 357, 379
F-DELETE-request	Declared at line: referenced at:	198 (TYP), 123,

F-DELETE-response	Declared at line: referenced at:	198 201 (TYP), 124, 201
F-DESELECT-request	Declared at line: referenced at:	166 (TYP), 119, 166
F-DESELECT-response	Declared at line: referenced at:	169 (TYP), 120, 169
F-END-GROUP-request	Declared at line: referenced at:	295 (TYP), 135, 295
F-END-GROUP-response	Declared at line: referenced at:	298 (TYP), 136, 298
F-ERASE-request	Declared at line: referenced at:	341 (TYP), 141, 341
F-ERASE-response	Declared at line: referenced at:	344 (TYP), 142, 344
F-GROUP-COPY-request	Declared at line: referenced at:	864 (TYP), 772, 864
F-GROUP-COPY-response	Declared at line: referenced at:	876 (TYP), 773, 876
F-GROUP-DELETE-request	Declared at line: referenced at:	835 (TYP), 768, 835
F-GROUP-DELETE-response	Declared at line: referenced at:	839 (TYP), 769, 839
F-GROUP-LIST-request	Declared at line: referenced at:	882 (TYP), 774, 882
F-GROUP-LIST-response	Declared at line: referenced at:	887 (TYP), 775, 887
F-GROUP-MOVE-request	Declared at line: referenced at:	846 (TYP), 770, 846
F-GROUP-MOVE-response	Declared at line: referenced at:	858 (TYP), 771, 858
F-GROUP-SELECT-request	Declared at line: referenced at:	818 (TYP), 766, 818
F-GROUP-SELECT-response	Declared at line: referenced at:	830 (TYP), 767, 830
F-INITIALIZE-request	Declared at line: referenced at:	15 (TYP), 8,