
**Textile machinery and accessories —
Spinning preparatory and spinning
machinery — Main dimensions of coverings
for top rollers**

*Matériel pour l'industrie textile — Matériel de préparation de filature et de
filature — Dimensions principales des garnitures pour cylindres supérieurs*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 98:2001

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 98 was prepared by Technical Committee ISO/TC 72, *Textile machinery and machinery for dry-cleaning and industrial laundering*, Subcommittee SC 1, *Spinning preparatory, spinning, twisting and winding machinery and accessories*.

This third edition cancels and replaces the second edition (ISO 98:1977), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 98:2001

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 98:2001

Textile machinery and accessories — Spinning preparatory and spinning machinery — Main dimensions of coverings for top rollers

1 Scope

This International Standard specifies the main dimensions of coverings for ready-for-use top rollers (synthetic coverings). It is applicable to spinning preparatory and spinning machinery.

2 Symbols

d_1	bare roller diameter
d_2	diameter with covering (finished ground)
b	width of covering
F	saddle force
B	type of execution of covering with rectangular sides (see Figure 1 and Figure 2)
C	type of execution of covering with beveled sides (see Figure 1 and Figure 2)
D	type of execution of covering with rounded sides (see Figure 1 and Figure 2)

3 Dimensions

3.1 Single-boss top rollers

The main dimensions of coverings for single-boss top rollers used for spinning preparatory machinery (e.g. draw-frames and comber), are given in Figure 1 and Tables 1, 2 and 3 (see Figure 2 for twin-boss top rollers). In the case of single-boss top rollers with removable bushings execution is similar to that shown in Figure 3.

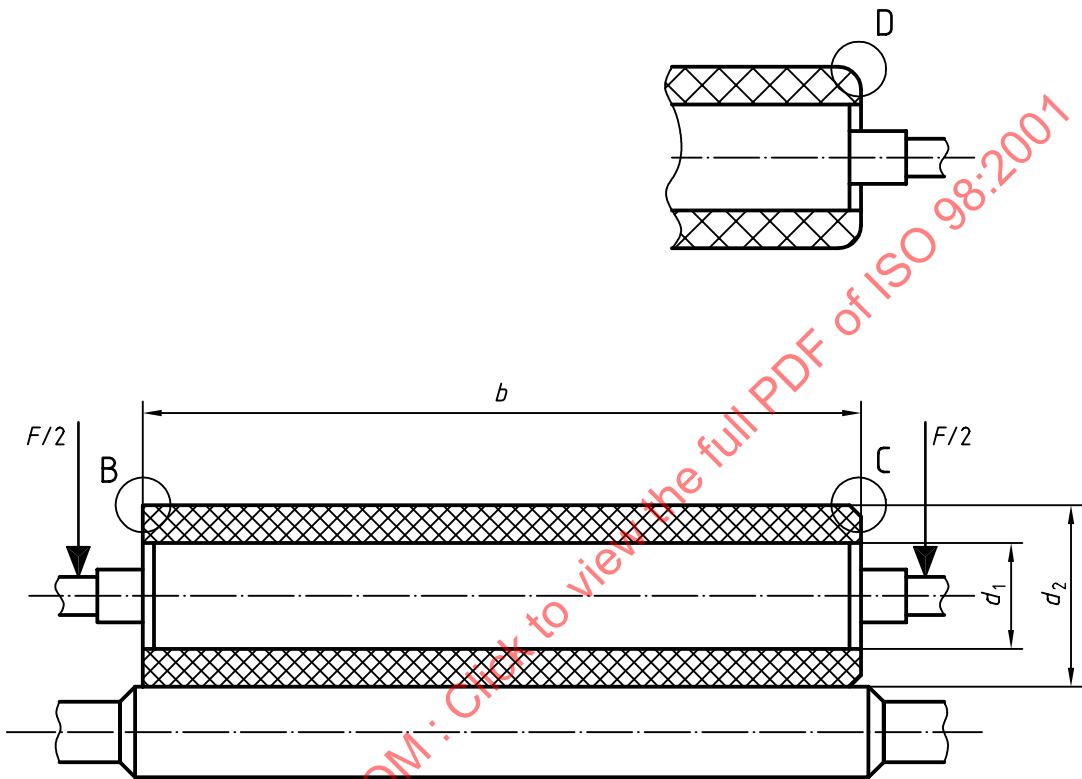


Figure 1 — Diameters and covering widths for single-boss top rollers

Table 1 — Bare roller diameter

															Dimensions in millimetres			
d_1	16	18	19	23	26	28	30	35	40	45	50	55	60	65	70	75	80	
NOTE For $d_1 > 80$, in increments of 10.																		

Table 2 — Roller diameter with covering (finished ground)

Dimensions in millimetres																
d_2	25	28	32	34	36	40	45	50	55	60	65	70	75	80	85	90
NOTE For $d_2 > 90$, in increments of 10.																

Table 3 — Width of covering

Dimensions in millimetres																
b	80	90	100	110	125	140	160	180	200	220	250	280	315	355	400	450

3.2 Twin-boss top rollers

The main dimensions of coverings for twin-boss top rollers used for spinning and roving frames are given in Figure 2 and Tables 4, 5 and 6. In the case of twin-boss top rollers with removable bushings, execution is similar to that shown in Figure 3.

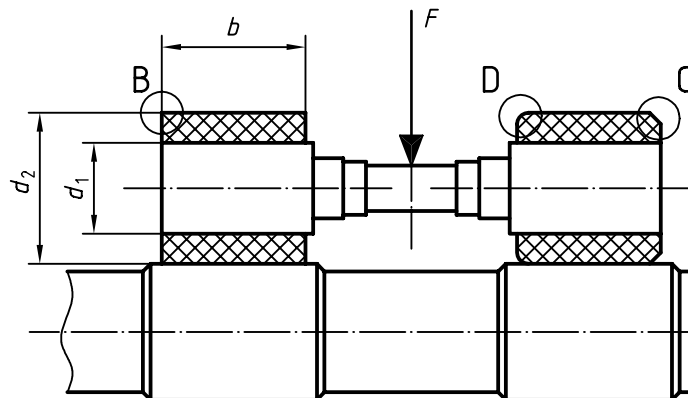


Figure 2 — Diameters and covering widths for twin-boss top rollers

Table 4 — Bare roller diameter

Dimensions in millimetres

d_1	19	23	25	28	30	35	40	45	50	55	60
-------	----	----	----	----	----	----	----	----	----	----	----

NOTE For $d_1 > 60$, in increments of 10.

Table 5 — Roller diameter with covering (finished ground)

Dimensions in millimetres

d_2	25	28	30	32	35	40	45	50	55	60	65	70	75	80
-------	----	----	----	----	----	----	----	----	----	----	----	----	----	----

NOTE For $d_2 > 80$, in increments of 5.

Table 6 — Width of covering

Dimensions in millimetres

b	25	28	30	32	34	35	40	45	50	55	60
-----	----	----	----	----	----	----	----	----	----	----	----

NOTE For $b > 60$, in increments of 10.

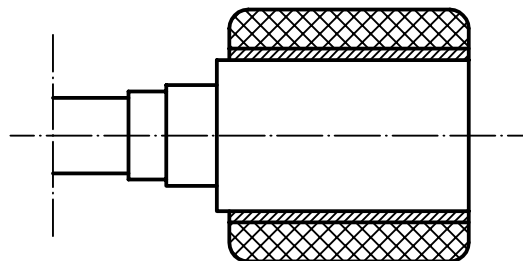


Figure 3 — Covering fixed to a removable bushing

4 Designation of coverings

The designation shall include a reference to this International Standard, followed by the dimensions d_1 , d_2 and b expressed in millimetres, the Shore A hardness, the type of execution and the saddle force F expressed in decanewtons.

If no specification is given by the buyer, the manufacturer may supply any of the three executions, B, C or D.

EXAMPLE A covering in accordance with ISO 98 of dimensions $d_1 = 28$ mm, $d_2 = 40$ mm and $b = 160$ mm, a Shore A hardness of 80, of execution type B and a force $F = 40$ decanewtons is designated as follows:

ISO 98-28 x 40 x 160-80-B-40

STANDARDSISO.COM : Click to view the full PDF of ISO 98:2001